68W Explosion Proof LED Visible White / UV Light
120-240V AC - Class 1 Div 1&2, Class 2 Div 1&2 - Paint Spray Booth
Instruction Manual

Thank you for your purchase of the Larson Electronics EPL-48-2L-GSLED-VISUVA.

WARNING:

READ CAREFULLY BEFORE INSTALLING FIXTURE. RETAIN THESE INSTRUCTIONS FOR FUTURE REFERENCE.
CRITICAL SAFETY INSTRUCTIONS:

TO AVOID THE RISK OF FIRE, EXPLOSION OR ELECTRIC SHOCK, THIS PRODUCT SHOULD BE INSTALLED, INSPECTED AND MAINTAINED BY A QUALIFIED ELECTRICIAN ONLY, IN ACCORDANCE WITH ALL APPLICABLE ELECTRICAL CODES.

TO AVOID ELECTRIC SHOCK:

- BE CERTAIN ELECTRICAL POWER IS OFF BEFORE AND DURING INSTALLATION AND MAINTENANCE.
- PRODUCT MUST BE CONNECTED TO A WIRING SYSTEM WITH AN EQUIPMENT-GROUNDING CONDUCTOR.

TO AVOID EXPLOSION:

- MAKE SURE THE SUPPLY VOLTAGE IS WITHIN THE VOLTAGE RATING.
- ENSURE THE MARKED T RATING IS LESS THAN THE IGNITION TEMPERATURE OF THE HAZARDOUS ATMOSPHERE.
- DO NOT OPERATE IN AMBIENT TEMPERATURES ABOVE THOSE INDICATED ON THE PRODUCT NAMEPLATE.
- DO NOT OPERATE IF THE LENS, CORD, SEALS, HOUSING, RECEPTACLES, ETC. IS CRACKED OR DAMAGED. IF SO, DISCONTINUE USE AND CONTACT MANUFACTURER FOR REPLACEMENT PARTS.
- ALL FASTENERS SHOULD BE PROPERLY SEATED.

The EPL-48-2L-GSLED-VISUVA from Larson Electronics is an Explosion Proof LED LED Visible White / UV Light Fixture that is NRTL Listed for United States and Canada, rated for Class I Divisions 1 & 2, Class II Divisions 1 & 2, Paint Spray Booth approved, and is NRTL Certified to UL 1598A Wet Locations. This fixture can provide visible white light, UV light, or a combo of both at the same time. It uses advanced LED light technology to produce both visible white light and ultraviolet light and is T6 rated for hazardous locations where UV lamps are used in paint and adhesive curing, food inspection, or for non-destructive testing.

INSTRUCTIONS FOR INSTALLING


We strongly recommend that only a licensed electrician install this product.

WARNING: Make sure that the power is disconnected before installing. This fixture is extremely heavy and must be mounted to a surface that can structurally support the load.

NOTE: This fixture requires a minimum of 50 inches of clearance from re-lamp end for lamp replacement. An optional drop mounting kit that will allow for end to end row mounting is available, please consult factory.

WARNING: Do not let fixture hang on one bracket at any time. Failing to comply can result in breakage of end casting or mounting bracket, allowing the fixture to fall, which can cause serious injury or death.

- The mounting brackets are shipped installed on the fixture.
- Install the brackets to wall or ceiling with two 3/8" bolts (not supplied) at center measurements.
- Fixture is now ready for mounting.
- For pendant mounts, see reference image.

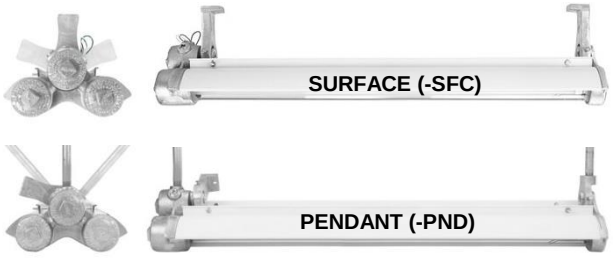

It is strongly suggested to use two licensed electricians to proceed with the final mounting of the fixture to avoid any possible personnel injury or damage to the fixture as the unit weights up to 55lbs and will be slightly awkward to hold in position and attach to brackets mounted on wall or ceiling. Depending on mounting height and scaffolding, a hydraulic man–lift or two good quality ladders should be used.

ADJUSTABLE SURFACE MOUNTING BRACKETS

Each bracket is cinched to the bracket mounting peg on each side of the light. The angle of the bracket is set by tightening two cap screws on either side of the bracket. The cap screws act as a set screw. The bracket itself is mounted via a single bolt hole at the top the bracket. There are two brackets, one on each end of the light. Once the brackets are mounted to a surface (ceiling, floor or wall), the light fixture can be removed from the brackets by loosening the cap screws that hold the bracket to the mounting peg.

SUSPENSION MOUNTING

Pendant mount fixtures hang from the ceiling and are suspended by rigid pipe. Each fixture features a 1/2" NPT junction box on one end, and a 1/2" NPT adjustable L-bracket on the other end of the fixture. Operators bring rigid pipe down to the threaded mounting hubs. Wiring is fed down through the rigid pipe to the junction box and tied in to the fixture's lead wires, completing the electrical connection. The adjustable L-shape mounting bracket provides support for the opposite end of the fixture.

INSTALLATION PRECAUTIONS


- Do not install fixture in any classified location where the marked operating temperature exceeds the ignition temperature of the hazardous atmospheres.
- Consult fixture nameplate for the suitability ambient temperature shown on the nameplate.
- Refer to fixture nameplate for minimum supply wire temperature rating.
- Verify that the supply voltage agrees with fixture rating as indicated on nameplate.
- All local and national electrical/building codes must be followed when installing this lighting fixture. For code interpretation, consult your local authority.
- Product must be used only with glass tubes intact and all cap threads fully engaged. Do not use if glass tubes are cracked or damaged.

WIRING

We strongly encourage a licensed electrician install this product, in all locations, especially in outdoor areas where weatherproofing may be required.

Warning: *Check product label for correct input voltage!*

Attach supply line wires to the appropriate light fixture wires as shown in the diagram ➔

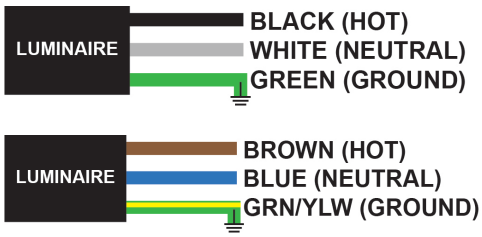

Secure each pair of wires according to the diagram. Utilize a junction box or similar device and take precautionary steps for weatherproofing all connections if installed in a location where water may come in contact with the unit. Ensure the unit is properly grounded and that wiring is done according to all local and national electrical/building codes.

WARNING: Fixture must be grounded as required per paragraph 410-21 and article 250 of the National Electric Code and/or rule 30-500. Failure to properly ground this fixture will create an electrical shock, which can cause serious injury or death.


INSTRUCTIONS FOR RELAMP

⚠WARNING

- To avoid risk of fire, explosion or electric shock, this product should be maintained by a qualified electrician only, in accordance with all applicable codes and regulations.
- To avoid electric shock: Be certain electrical power is OFF before and during maintenance.

Caution: Only use lamp size, type and/or wattage as shown on fixture nameplate.

FIGURE 1

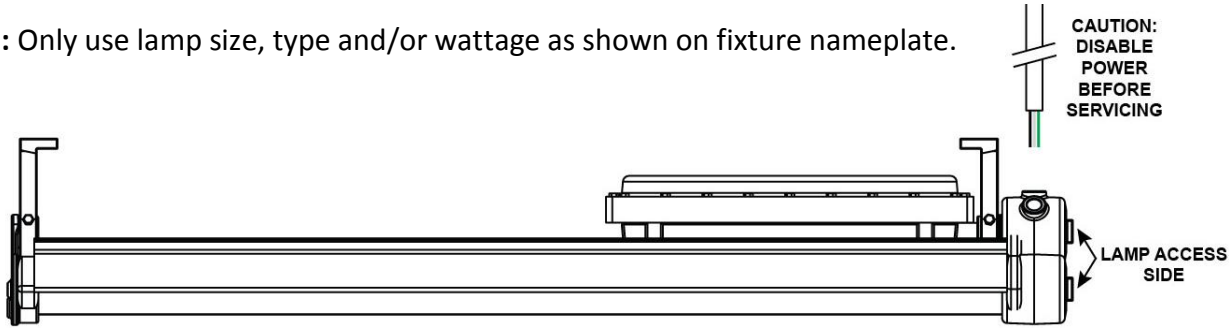



1. Disconnect power to the fixture prior to servicing. **FIGURE 1**


FIGURE 2


2. With a wrench, remove end-cap (lamp access cover) for the lamp you wish to replace. Rotate counter-clockwise. **FIGURE 2**


3. Loosen the two lamp holder bracket screws holding the old lamp. **FIGURE 3** Twist and remove the lamp holder bracket. **FIGURE 4**


FIGURE 3


FIGURE 4

4. Remove the old lamp and install the new lamp, seating lamp in opposite lamp holder. **FIGURE 5**



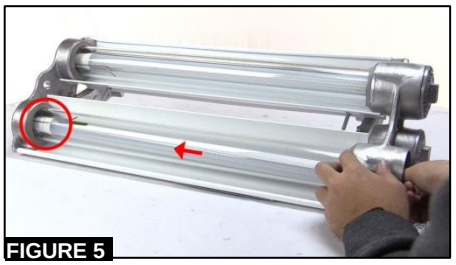
FIGURE 5

5. Replace lamp holder into position on the lamp. Twist slightly to place the lamp holder bracket under screw heads and tighten the screws. **FIGURE 3**

6. Reattach end-cap. Rotate clockwise. **FIGURE 6**


FIGURE 6

MAINTENANCE

Caution: To avoid personal injury, disconnect power to the light and allow the unit to cool down before performing maintenance.

Warning: No user serviceable parts inside of fixture. Risk of electric shock. Removal of the lens will void the warranty.

1. Perform visual, mechanical and electrical inspections on a regular basis. We recommend routine checks to be made on a yearly basis. Frequency of use and environment should determine this. It is recommended to follow an Electrical Preventive Maintenance Program as described in NFPA 70B: Recommended practice for Electrical Equipment.
2. The lens should be cleaned periodically as needed to ensure continued photometric performance. Clean the lens with a damp, non-abrasive, lint-free cloth. If not sufficient, use mild soap or a liquid cleaner.
3. Inspect the cooling surface on the rear of luminaire to ensure that it is free of any obstructions or contamination (i.e. excessive dust build-up). Clean with a non-abrasive cloth if needed.
4. Do not operate if the lens is cracked or damaged. All fasteners should be properly seated.

USE AND CARE

Unauthorized modification may impair the function and/or safety of this device and could affect the life of the equipment. Always check for damaged or worn out parts before using the device. Store it in a secure place out of the reach of children when not in use. Inspect for good working condition prior to storage and before re-use.

REPLACEMENT PARTS

The EPL-48-2L-GSLED-VISUVA is designed to provide years of reliable performance. Should the need for replacement parts arise, please contact Larson Electronics.



THESE INSTRUCTIONS MAY NOT COVER ALL DETAILS OR VARIATIONS OF THIS PRODUCT FOR YOUR EQUIPMENT OR INSTALLATION REQUIREMENTS. SHOULD FURTHER INFORMATION NOT COVERED BY THESE INSTRUCTIONS BE REQUIRED, PLEASE CONTACT LARSON ELECTRONICS BY EMAIL AT SALES@LARSONELECTRONICS.COM OR BY PHONE AT 1-877-348-9680 FOR FURTHER ASSISTANCE.

PLEASE VISIT LARSONELECTRONICS.COM FOR **WARRANTY** AND **RETURN** INFORMATION.

Ultraviolet Radiation Safety

WARNING: Do not attempt operation until you are familiar with all warnings, precautions, and procedures outlined within this instruction sheet.

OPERATION PRECAUTIONS

- **UV LIGHT WARNING:** UV-C light can cause temporary or permanent loss of vision, and temporary acute redness or ulceration (mild to severe sunburn) to exposed skin. To prevent exposure, do not operate the device in any application that allows UV-C light to be visible during operation.
- **UV LIGHT CAUTION:** UV light may degrade plastic and rubber components after longterm exposure.
- Currently, there are no work place related rules and regulations that are set by OSHA (Occupational Safety and Health Association) in regard to UVC environmental health and safety.
- **NEVER LOOK DIRECTLY AT THE BULB OR DISINFECTING TARGET ZONE**

OPERATION SAFETY

- People and animals are forbidden from being exposed to the light output of this cart for extended periods of time. Long term exposure will case damage to the eyes and skin.
- This product produces UV radiation. Anything in front of the unit will be exposed to UV radiation. Operators positioning the cart while not illuminated will not be exposed. Radiation is only emitted while the light is turned on. Radiation will not linger in the environment when the lamps have been powered off. Safety equipment is only required when the device is in-use.
- Wear eye protective gear when operating the equipment. Polycarbonate safety glasses at minimum are required during all operations. Full frontal polycarbonate or UV-preventative face masks are recommended.
- Wear long sleeves and gloves when operating the equipment. Personal protective gear is required for long term exposure.

OPERATION SAFETY STRATEGIES

- Instruct service personnel to never look directly at UV-C light without adequate eye protection.
- Make it a policy to never enter areas being disinfected with UV lighting systems without powering the system down first. Methods of powering down depends on the options of the device purchased and may include unplugging the light source, operating the power switch to power the lamps off, or turning the system off via a wireless remote control or wireless application.
- Place warning labels near all openings/entrances to areas being disinfected with UV lighting systems. When possible, lock access doors to prevent unexpected guests from entering the area.
- Close blinds/curtains of areas being disinfected with UV lighting systems if available. If not available, block off direct access to windows/doorways to prevent access to the area. If you cannot fully block off all access (hallways with visible windows, etc) place exterior warnings in areas prior to the exposed windows (hall pedestals, banners, posters) explaining what areas are being disinfected and to not look into the room.
- Educate non service personnel about the intended operations for UV disinfecting and what signage will be posted. Instruct non service personnel to never look directly at UV-C light.
- Instruct service personnel to always wear personal protective gear (as outlined above) when they must operate in an area that has UV-C exposure, for short or long term work.

These safety precautions will help ensure service personnel are protected from accidental exposure while maintaining the effectiveness of UV-C to eradicate biological contaminants.

In the event of UV exposure, the following actions are recommended.

- See an ophthalmologist if eye damage is suspected.
- Treat skin lesions immediately.
- For severe skin lesions, seek local medical treatment and follow their recommendations for treatment.
- Follow your organization’s incident reporting procedure. These often require documentation of the date and time of the incident, persons involved, equipment involved and type of injury.