

EPL-SL-10-LED-E2E-48V

48V Explosion Proof LED String Lights - 10 light - Daisy Chain End-2-End Connection - 100ft Stringer

Product ID: 105170

Please see last page for supporting documentation for this product(certificates, CAD files & drawings, IES files, wiring diagrams, etc).



Larson Electronics LLC manufactures a wide variety of products, including custom built to spec designs. The pictures displayed for this unit are a general representation of form factor for the product line and may not accurately represent this exact configuration in every detail due to custom builds and changes between similar products in our standard catalog. The specifics for this configuration are listed in the specification table and supporting documentation (CAD files, Dimensional Drawing, Name Plate Diagram, Wiring Diagram, etc.). This means that specific details (receptacles, plugs, wires, connections, mounting brackets, external finishes, etc.) may not be accurately represented in images vs specifications. Please review specifications and do not order based solely on images.

EPL-SL-10-LED-E2E-48V

UL Listing: United States

Dimensions- Each Lamp: L-16.5" Diam-5"

Total Watts: 100

Single Lamp Watt: 10 watts

Voltage: 48V AC/DC

Amps: 2.09 @ 48V

Mounting: Handheld / Hanging via Aluminum Hooks

Wiring: 100' 14/3 SOOW Cable - 20A EXP Plug - EXP Outlet

Total Length: 125'

Single Lamp Weight: 6 lbs

Total Weight: 70 lbs

U.L. Ratings

Class 1, Divisions 1 & 2, Groups C, D

Class 2, Divisions 1 & 2, Groups, F, G

Class 1, Zone 1, Group IIB

NEMA 4X

Special Orders - Special Requirements

Contact us for special requirements

Toll Free: 1-800-369-6671

Intl: 1-903-270-1187

Fax: 1-903-498-3364

E-mail: sales@larsonelectronics.com

Made in the USA

The Larson Electronics EPL-SL-10-LED-E2E-48V Low Voltage 48V DC Explosion Proof String Light set is UL Listed Class 1 Division 1 Groups C and D and is ideal for general close work and inspection activities in hazardous locations requiring explosion proof protection.

[Click here to see the Incandescent version of this light](#)

This low voltage 48V explosion proof string light set from Larson Electronics contains a total of ten 10 watt work lights equipped with aluminum hooks and

connected in series along 100 feet of 14/3 SOOW explosion proof cord. A molded T junction is mounted every ten feet, with 3 feet of 16/3 SOOW cord connecting a single drop light to the backbone. The cord on this unit is terminated with a 20 amp 5-20 Class 1, Division 1 explosion proof plug for complete protection. With this arrangement, each drop light cannot spark if pulled apart or dragged. An 25 foot tail section of main SOOW cord is included to allow ample length for connection to power sources. A 20 amp explosion proof outlet at the end of the backbone provides the ability to connect multiple units end to end, allowing operators to daisy chain multiple stringers together along the jobsite.

10 Watt LED Bulb



Molded T Connector w/ Hook Ring




25' whip w/ EXP Plug

[Click Photos to Enlarge](#)

[Click Photos to Enlarge](#)

[Click Photos to Enlarge](#)



100 Watt Incandescent Bulb



With the EPL-SL-10-LED-E2E-48V

Unlike gas burning and arc type lamps that have glass bulbs, LEDs have no filaments or fragile housings to break during operation. Instead of heating a small filament or using a combination of gases to produce light, light emitting diodes (LEDs) use semi-conductive materials that illuminate when electric current applied and emitting light. With LED lights, there is no warm up time or cool down time before re-striking and provide instant illumination when powered on, adding to the reliability of LED technology. By nature, LED light sources run significantly cooler than traditional lamps, reducing the chance of accidental burns and increased temperatures due to heat emissions. This solid state design of light emitting diodes provides a more reliable, stable, durable, and energy efficient light source over traditional lighting.

This unit incorporates ten explosion proof LED hand lamps connected in series and is suitable for use in areas where petrochemical vapors and various dusts are present. The machined aluminum housings, cast aluminum guard, tempered glass lamp globe, and abrasion resistant cord make this a very durable unit that will resist damage from chemicals, abrasion, vibrations and impacts. This string lighting solution will provide the lighting you require in a flexible, easy to manage configuration. The hand lamps can be moved around and hooked to different points on your scaffold. The lights, however must remain within 10 feet of one other. Each molded T section contains a hook eyelet, allowing operators to suspend the entire backbone off the ground and out of the work space. This explosion proof string light is equipped with an explosion proof outlet 5' from the last junction point, allowing operators to connect multiple units together end to end. Up to four units in 48 volt AC/DC can be connected end to end.

Stringer Energy Consumption Comparison

	<u>Incandescent</u>	<u>CFL</u>	<u>LED</u>
Wattage	1000 watts	260 watts	100 watts
Amp Draw @ 48V AC/DC	20.84 amps	5.42 amps	2.09 amps
Lamp Life Expectancy	1,500 hours	8,000 hours	50,000 hours
Color Temperature	2800K	4300K	6000K
Operation cost per year	\$321.2	\$83.52	\$32.12

(8hs/day @ 11c/kWh)

This stringer light set is Class 1, Division 1 rated for Groups C and D and Class II, Division 1 Groups F and G. This unit is configured to operate on 48V AC or DC. We also offer this explosion proof string light in a high voltage 120-277V AC and a low voltage 12-24V AC/DC configuration.

Made in USA Quality

1. Federal Spec Cord.
2. Explosion Proof.
3. Total of (10) 10 watt LED Lamps.
4. Non-sparking aluminum construction.
5. UL Class 1 Div 1 Class 2 Div1
7. 48V AC/DC Operation
8. SOOW cable.
9. Aluminum Hooks for Convenient Placement.
10. Daisy Chain Connections.


Lamp Features


100 watts of LED illumination
Non-sparking aluminum housings
Light weight mold T Junctions
Cast aluminum guard prevent lamp or globe damage
Tempered Soda-Lime Glass Lamp Globe
Integrated lamp shock absorbers prevent drop damage
Swivel hook for hanging and hands free operation
14/3 SOOW Abrasion Resistant Cable



Frequently Asked Questions (FAQ)



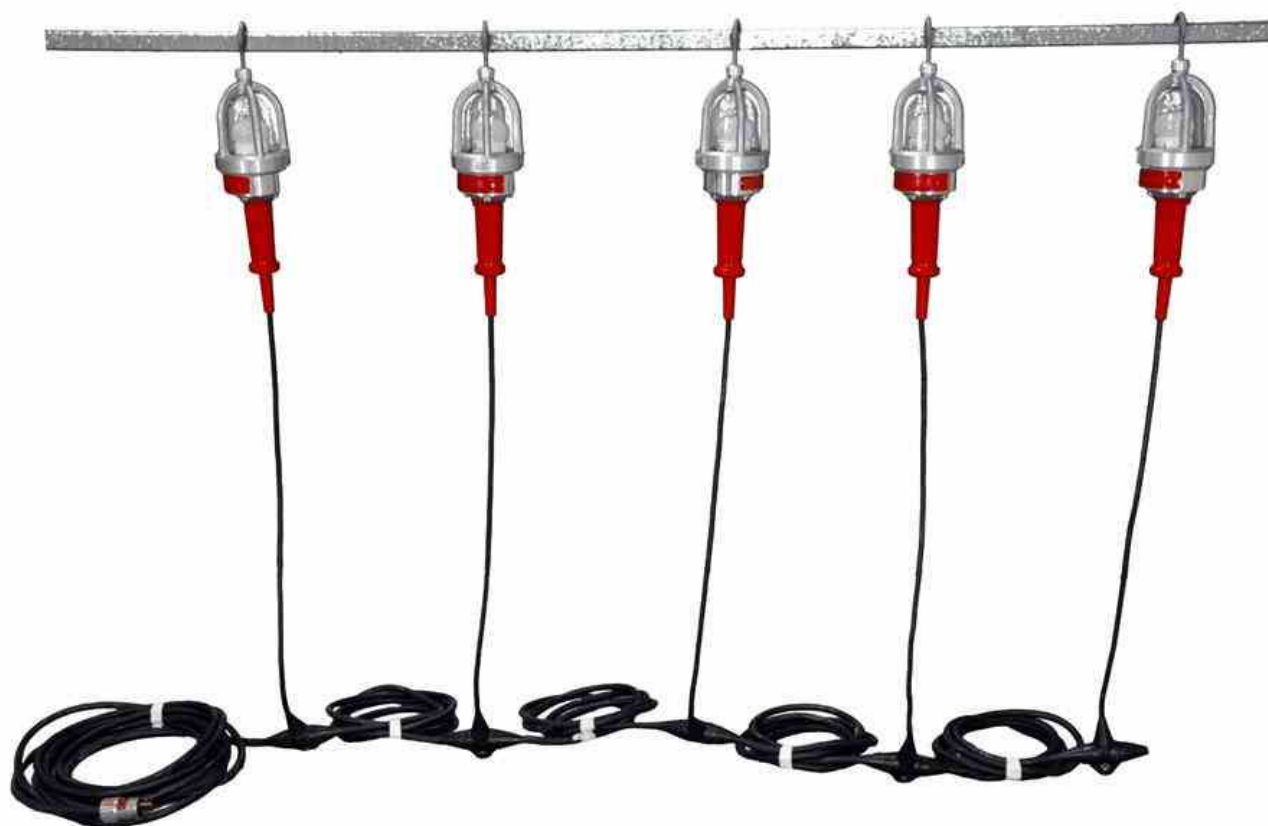

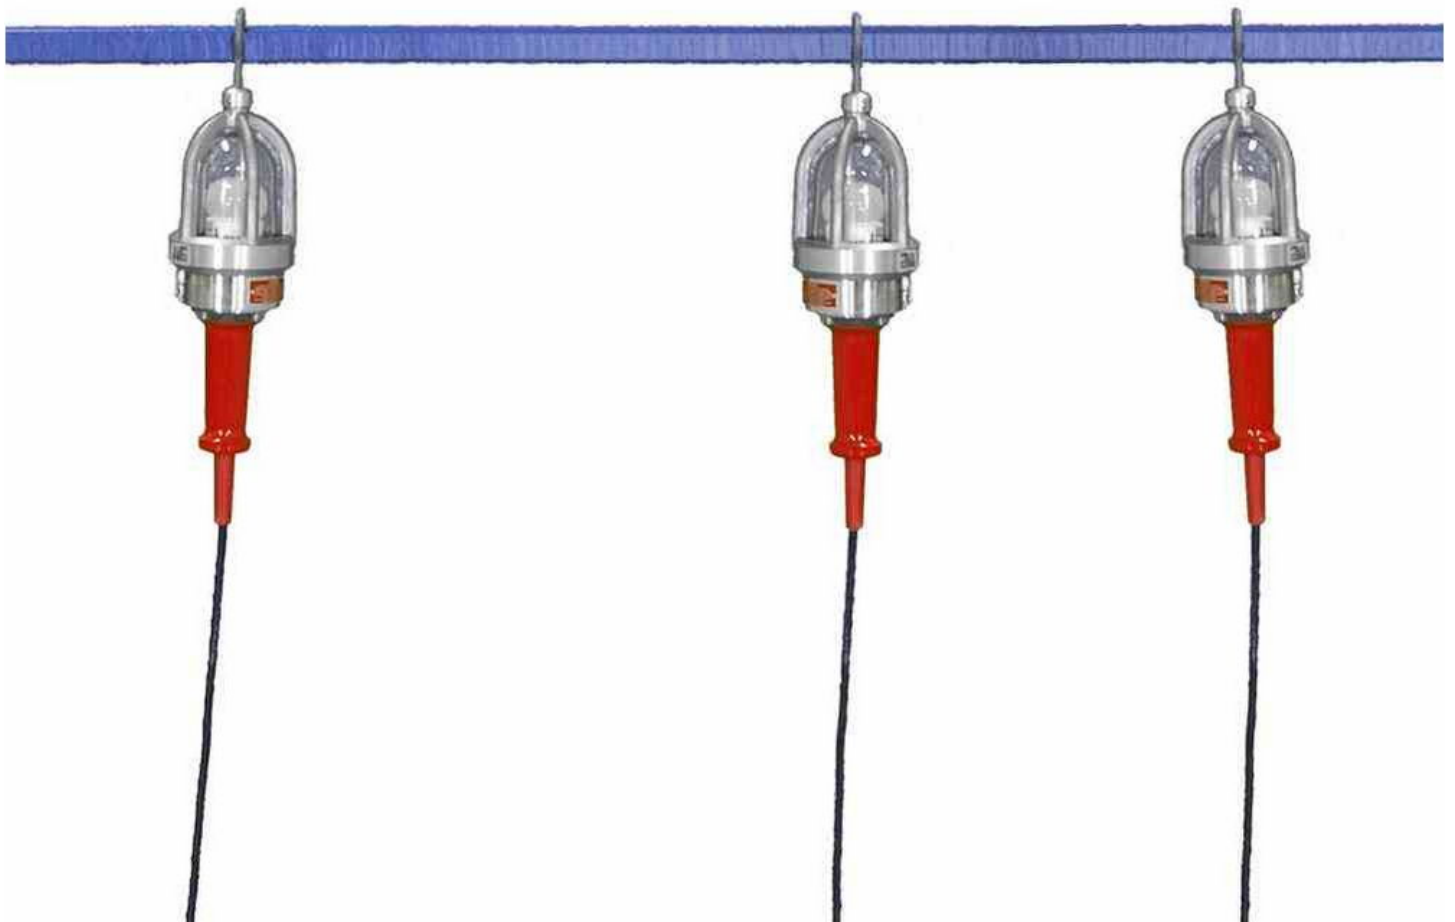



EPL-SL-10-LED-E2E-48V

Product ID: 105170

Harmonized System (HS) Code: 9405.41.84.10

Export Control Classification Number (ECCN): EAR99

Links (Click on the below items to view):

- [Canadian CEC Certificate \(Commonly referred to as CSA Certificate\)](#)
- [CE Certificate](#)
- [Certificate 1, Misc](#)
- [Certificate 2, Misc](#)
- [Certificate 3, Misc](#)
- [MSDS \(Material Safety Data Sheet](#)
- [RoHS Certificate \(Restriction of Hazardous Substances\)](#)
- [USA NEC Certificate \(Commonly referred to as UL Certificate\)](#)
- [HigResPic1](#)
- [HigResPic2](#)
- [HigResPic3](#)
- [HigResPic4](#)
- [HigResPic5](#)
- [HigResPic6](#)
- [HigResPic7](#)
- [HigResPic8](#)
- [ISO 9001 Certification](#)
- [Business Certificate](#)
- [Shipping Time Map](#)