

EPLC2-PT-2X150LED-RT-480V

Explosion Proof 300 Watt Pole Top LED Light Fixture 35,000 Lumens - C1D2 / C2D1 - 347-480V AC

Product ID: 145943

Please see last page for supporting documentation for this product(certificates, CAD files & drawings, IES files, wiring diagrams, etc).



Larson Electronics LLC manufactures a wide variety of products, including custom built to spec designs. The pictures displayed for this unit are a general representation of form factor for the product line and may not accurately represent this exact configuration in every detail due to custom builds and changes between similar products in our standard catalog. The specifics for this configuration are listed in the specification table and supporting documentation (CAD files, Dimensional Drawing, Name Plate Diagram, Wiring Diagram, etc.). This means that specific details (receptacles, plugs, wires, connections, mounting brackets, external finishes, etc.) may not be accurately represented in images vs specifications. Please review specifications and do not order based solely on images.

EPLC2-PT-2X150LED-RT-480V - C1D1 Pole Top LED Light

Listing: United States - Canada

Lamp Type: Cree LED

Dimensions: 28"L x 16"W 5"D

Weight: 67 lbs

Voltage: 347-480V AC

Total Watts: 300W

Lumens: 35,000

Luminous Efficacy: 116.67 Lm/W

Lamp Life: 60,000+ Hours

Color Temp: 5000K, 4000K, 3000K

Color Rendering Index: >75 CRI

Beam Angle: 60° or 125°

Lighting Configuration: Flood Pattern

Power Efficiency: >95%

Power Factor: 0.992

Ambient Operating Temp Range: -50°C to +65°C

Operating Temp Rating: T5

Housing Material: Copper Free Cast Aluminum

Housing Finish: Epoxy Powder Coated - Grey

Lens Material: Hardened Borosilicate Glass - Impact Resistant

Gasket Material: Silicone

Mounting: Pole Top Slip Fitter Mount

Wiring Hub: 3/4" NPT

Ratings/Approvals

Listed for United States and Canada

Class I, Divisions 2, Groups C and D

Class II, Divisions 1 & 2, Groups E,F,G

Class III, Divisions 1 & 2

Certified to UL 844 Ed. 13

Certified to UL 1598A

Certified to C22.2 No. 137 Rev 2009

Certified to C22.2 No. 250.0

Certified to C22.2 No. 30-M-1986 Rev 2012

T5 Temperature Rating

Paint Spray Booth Approved

IEC 60529 Tested

IP67 Rated Waterproof

LEL Approved

Multiple Driver Banks

80% Lumen Retention after 60,000 Hours

Factory Sealed Light Fixture

Recommended 15' to 40' Mounting Height

NEMA 4X

ABS Type

Special Orders - Special Requirements

Contact us for special requirements

Toll Free: 1-800-369-6671

Intl: 1-903-270-1187

Fax: 1-903-498-3364

E-mail: sales@larsonelectronics.com

Made in the USA

The Larson Electronics EPLC2-PT-2X150LED-RT-480V Explosion Proof pole top slip fitter light fixture provides operators with a powerful and energy efficient alternative to traditional hazardous location luminaries. Cree LED technology and compact design makes this lamp an excellent replacement upgrade option for bulky and high maintenance cost older fixtures. This fixture operates on 347-480V AC.

*****PLEASE NOTE: ANY FREE SHIPPING OFFERS DO NOT APPLY TO THIS HAZARDOUS LOCATION LIGHT FIXTURE*****

This Class I Division 2, Class II Division 1 & 2 explosion proof light fixture provides 35,000 of high quality light while drawing only 300 watts. The copper free aluminum alloy body is powder coated for added durability and an attractive aesthetic appearance. Special heat dissipating design in conjunction with LED technology helps this fixture to achieve an excellent 60,000 hour rated lifespan with 80% lumen retention. Light weight and a low profile make this unit an attractive alternative to larger and heavier older fixtures and requires less hardware to install.

The explosion proof LED light fixture features multiple LED drivers which helps to increase the operational life of the fixture. With traditional LED lights, in the event an LED array or driver fails, the entire fixture no longer illuminates. This new series of LED lamps contains twenty-four individual LED boards configured in a series of banks. Each bank contains two LED boards with an individual driver. In the event of a driver failure, only one bank of LEDs will be effected while the other banks will continue to operate. In the event that of an LED failure, the mating LED will continue to operate.

LED Benefits: Unlike gas burning and arc type lamps that have glass bulbs, LEDs have no filaments or fragile housings to break during operation and/or transportation. Instead of heating a small filament or using a combination of gases to produce light, light emitting diodes (LEDs) use semi-conductive materials that illuminate when electric current is applied, providing instant illumination with no warm up or cool down time before re-striking. Because there is no warm up period, this light can be cycled on and off with no reduction in lamp life. LED lights run at significantly cooler temperatures than traditional metal halide and high pressure sodium lights and contain no harmful gases, vapors, or mercury, making them both safer and more energy efficient. No extra energy is wasted in cooling enclosed work areas due to external heat emissions from bulb type lights, and the operator risks associated with traditional lighting methods, such as accidental burns and exposure to hazardous substances contained in the glass bulbs, are eliminated. In addition, LEDs are also safer for the environment as they are 100% recyclable, which eliminates the need for costly special disposal services required with traditional gas burning and arc type lamps.

This light is universal voltage capable and can be operated with 347-480 VAC without modifications. 347V is common in Western Canada, while 480V is common in the United States and Eastern Canada. This explosion proof LED light fixture is IP67 rated, dust-proof, and protected against high pressure jets and temporary submersion. The cast aluminum body and LED lamp give this light excellent durability and resistance to vibration and impacts. The housing is specially designed to dissipate heat which increases the efficiency and lifespan of the LEDs and electronics.

This explosion proof LED light fixture is IP67 rated, dust-proof, and protected against high pressure jets and temporary submersion. The cast aluminum body and LED lamp give this light excellent durability and resistance to vibration and

impacts. The housing is specially designed to dissipate heat which increases the efficiency and lifespan of the LEDs and electronics.

This LED light produces 35,000 lumens with a color temperature of 5000K standard and a color rendering index of 75 which produces colors and details much more accurately than high pressure sodium or mercury vapor luminaries. We also offer a 3000K warm white and 4000K natural white color temperature options (longer lead times may apply for non-standard temperatures). The EPLC2-PT-2X150LED-RT-480V explosion proof LED fixture includes a pole top slip fitter mount.

Mounting: Each unit is equipped with an innovative trunnion style mounting bracket and is attached to a slip fit yoke for easy installation. The slip fit yoke is built to customer's specs, enabling operators to mount this explosion proof LED light to their specific pole size. For example, selecting a 2" OD mount means that the yoke mount will fit onto pipes or bull horns with a 2" OD.

At Larson Electronics, we do more than meet your lighting needs. We also provide replacement, retrofit, and upgrade parts as well as industrial grade power accessories. Our craftsmen can custom build any lighting system and/or accessories to fit the unique demands of your operation. A commitment to honesty, quality, and dependability has made Larson Electronics a leader in the lighting and electronics business since 1973. Contact us today at 800-369-6671 or message sales@larsonelectronics.com for more information about our custom options tailored to meet your specific industry needs.


High Quality Features

1. Low power consumption.
2. Instant on/off operation.
3. Fixture constructed of extruded corrosion resistant copper free aluminum alloy.
4. Superior color rendering compared to HPS, LPS, MH.
5. Retains 80% lumen output after 60,000 operating hours.
6. Powder coated aluminum fixture body.
7. Pole top slip fitter mount included
8. Low profile - Light weight
9. 35,000 Lumen output from only 300 watts
10. Multiple LED Driver Banks for Redundancy
11. Paint Spray Booth Approved

Superior LED Benefits

1. 60,000 hour lifespan.
 2. Can SAVE 50% or more on energy.
 3. Qualifies retrofit projects for financial incentives, including utility rebates, tax credits and energy loan programs.
 4. Reduces energy use and prolongs life-spans of peripheral cooling units (A/C, refrigeration)
 5. 100% recyclable.
 6. No toxins-lead, mercury.
 7. No UV light, infrared radiation or CO2 emissions.
 8. Qualifies buildings for LED and other sustainable business certifications.
 9. Bright, even light maintains consistent color over time.
 10. Instant on/off - No flickering, delays or buzzing.
 11. Very good color rendering.
 12. Vibration/impact resistant.
 13. Significantly cooler operation.
 14. Less frequent outages, higher output improves workplace safety.
-

Frequently Asked Questions (FAQ)

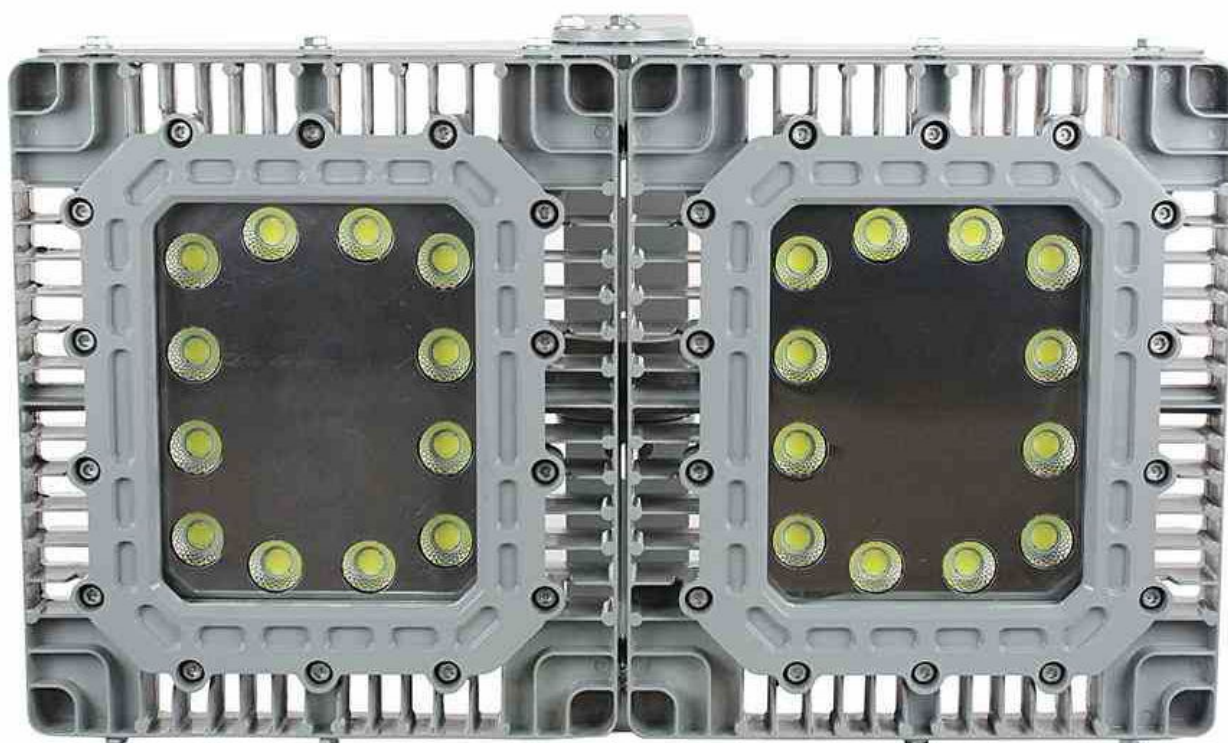

EPLC2-PT-2X150LED-RT-480V

Product ID: 145943

Harmonized System (HS) Code: 9405.41.84.10

Export Control Classification Number (ECCN): EAR99

Options:

EPLC2-PT-2X150LED-RT-480V-Beam Spread-Pole OD Inches

Example: EPLC2-PT-2X150LED-RT-480V-60DB-2in

Beam Spread	
60°	-60DB
125°	-125DB

Pole OD Inches	
2	-2in
2.25	-2.25in
2.5	-2.5in
2.75	-2.75in
3	-3in

Links (Click on the below items to view):

- [HigResPic1](#)
- [HigResPic2](#)
- [HigResPic3](#)
- [HigResPic4](#)
- [HigResPic5](#)
- [HigResPic6](#)
- [HigResPic7](#)
- [HigResPic8](#)
- [HigResPic9](#)
- [HigResPic10](#)
- [Video1](#)
- [Video2](#)
- [Video3](#)
- [ISO 9001 Certification](#)
- [Business Certificate](#)
- [Shipping Time Map](#)