Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.498.3364

MT-PML-R7-1P-GMR-100KVA-SZ-LT-DF-A6-BM-CS-2L4-M2

100 KVA Pad Mount Transformer - 12470Y/7200 Grounded Wye Primary, 240/120V Secondary - Mineral Oil Fluid / ONAN - 304 Stainless

Product ID: 286465

Please see last page for supporting documentation for this product(certificates, CAD files & drawings, IES files, wiring diagrams, etc).



Larson Electronics LLC manufactures a wide variety of products, including custom built to spec designs. The pictures displayed for this unit are a general representation of form factor for the product line and may not accurately represent this exact configuration in every detail due to custom builds and changes between similar products in our standard catalog. The specifics for this configuration are listed in the specification table and supporting documentation (CAD files, Dimensional Drawing, Name Plate Diagram, Wiring Diagram, etc.). This means that specific details (receptacles, plugs, wires, connections, mounting brackets, external finishes, etc.) may not be accurately represented in images vs specifications. Please review specifications and do not order based solely on images.

MT-PML-R7-1P-GMR-100KVA-SZ-LT-DF-A6-BM-CS-2L4-M2 1-Wire 1PH Pad Mount Transformer

Transformer Type: Pad Mounted, Compartmental-Type
Transformer Configuration: Liquid Filled Pad Mounted, Corrosion Resistant Build
Transformer Feed Type: Loop Feed
Phase: Single Phase
Capacity: 100
Primary Voltage: 12470GrdY/7200
Primary Phasor: Grounded Wye
Primary BIL: 95 KV
Secondary Voltage: 240/120V (L-N-L)
Secondary Phasor: Dual Winding Single Phase
Secondary BIL: 30 KV
Frequency: 60 Hz
Temperature Rise: 65°C
Cooling Class: ONAN; Self-Cooled
Forced Air (Fans): None
Tap Changer: 5-Position Tap Changer
Tap Qty: (2) FCAN; (2) FCBN
Tap %: 2.5%

Impedance: 1.0-4.5%

Primary Connection Type: Dead Front
Primary Termination: Standoff Well Bushings w/ Removable Studs, 200A Load Break Elbows w/ Inserts
Primary Connection Qty: (2) Primary Connections w/ (2) Standoff Brackets for Parked

Ratings

Meets/Exceeds DOE 2016 Efficiency Ratings
Complies with ANSI / IEEE #C57.12.00
Complies with ANSI / IEEE #C57.12.25
Complies with ANSI / IEEE C57 12.28
Complies with ANSI / IEEE C57 12.38
Complies with ANSI / IEEE C57.12.70
Complies with ASTM D3487
Pentahead Entry Assembly
High-Fire Point Natural Ester Insulating Fluid
Non-PCB Insulating Fluid
Tamper Proof Housing
Lift Up Pad Lockable Lid

Efficiency: 99.00%
No Load Loss (in watts)*: +/- 273W
Load Loss (in watts)*: +/- 1105W
Total Load Loss (in watts)*: +/- 1378W

Note: Losses offered are typical only, not guaranteed
100% Stainless Steel Construction, Corrosion Resistant

Elbows
Primary Grounding Provisions: (1) Grounding lug, accepts #2 copper, having a 2-13 NC tapped hole, 7/16 inch deep.
Primary Surge Arrestors: (1) High Voltage Dead Break Elbow Surge Arrestor, Metal-Oxide-Varistor units included
Primary Surge Arrestor Voltage Rating: 10 kV Class
Primary Surge Arrestor MCOV Rating: 8.4 kVrms
Primary Over Current Protection (OCP): Weak Link Fuses
Primary Over Current Protection Method: Fused
Primary Over Current Protection Holder: Behind High-Voltage Bushing, w/ Opening Large Enough and Leads Long Enough to Replace In-Field
Secondary Connection Type: Live Front
Secondary Connections: Threaded Stud Terminals, 1" Threaded Copper Studs w/ Jam Nuts
Secondary Connection Qty: (3) w/ (1) Jam Nut on X1, X1 and (2) Jam Nuts on X3
Secondary Over Current Protection (OCP): Circuit Breaker
Secondary Grounding Provisions: (1) Grounding lug, accepts #2 copper, having a 2-13 NC tapped hole, 7/16 inch deep.
Load Break Switch: (1) 4-Position Load Break Switch
Efficiency: Meet DOE 2016 Standard
Insulation Fluid: Mineral Oil Insulating Fluid - Non-PCB Fluid
Fluid Capacity*: 120 Gallons
Liquid Level Indicator: Analog Gauge
Temperature Indicator: Analog Gauge
Pressure/Vacuum Indicator: Analog Gauge
Pressure Relief Device: Included, Automatic Action
Fault Indicator: Mounting Provisions Provided
Fill Valve: Included, 1" NPT Fill Plug
Drain Valve: Included, 1" NPT Drain Plug
Surge Arresters: High Elbow Surge Arresters on the Primary Side
Front: Dead Front Primary, Live Front Secondary
Winding Material: Copper
Ambient Temperature Rating: 40°C
Sound Level: 51 dBA
Elevation (Altitude): 3300ft (1000 meters) Above Sea Level
Tank Material: 304 Stainless Steel, w/ Recessed lifting lugs or lifting bosses with removable lifting bolts located on the tank sides
Cabinet Material: 304 Stainless Steel
Base Platform Material: 304 Stainless Steel w/ Removable Sill to Slide the On & Off the Pad w/o Cables
Housing Type: Tamper Resistant w/ Pad-lockable Lift-up Lid
Paint Type: Munsell Green Paint and Undercoating
Finish Color: Munsell 7.0 GY 3.29/1.5 Bell Green
Mounting: Pad Mount
Conduit Opening: Bottom Feed Underground Entry/Exit
Dimensions*: 36" x 37" x 37" - Fits Standard 37” x 43” Transformer Box Pad w/o Overhang
Weight*: 1,150 lb
*Please note that numbers are approximate and subject to change

Special Orders - Special Requirements
Contact us for special requirements
Toll Free: 1-800-369-6671
Intl: 1-903-270-1187
Fax: 1-903-498-3364
E-mail: sales@larsonelectronics.com

The MT-PML-R7-1P-GMR-100KVA-SZ-LT-DF-A6-BM-CS-2L4-M2 Industrial Pad Mount Transformer from Larson Electronics offers powerful, reliable, and efficient power distribution in indoor, outdoor, and public locations. The low operating costs, low heat emissions, and low cost of ownership makes this transformer ideal for a wide range of applications and businesses. An enclosed design caters to installations on concrete pads without protective fencing.
PLEASE NOTE: ANY FREE SHIPPING OFFERS DO NOT APPLY TO POWER DISTRIBUTION PANELS, TRANSFORMERS, OR SUBSTATIONS*
Transformer Features: With a transformer rating of 100 kVA, the industrial transformer features a primary voltage of single-phase 12470Y/7200 and a secondary voltage of single-phase 240/120V (L-N-L). The unit has a primary loop feed and dead-front primary connections. We also offer systems with radial feed and dead front primary/live front secondary connections. This transformer features a 5-position tap changer with (2) +/- 2.5% taps above and (2) +/- 2.5% taps below to allow small changes for voltage. This pad mount transformer features primary well bushings and standard spade connectors on the secondary side. Equipped with copper windings, this transformer consists of one coil and two

core loops.
The MT-PML-R7-1P-GMR-100KVA-SZ-LT-DF-A6-BM-CS-2L4-M2 is air cooled and does not have fans or mounting provision for fans. This unit features a 60°C temperature rise for reduced heat waste, increased reliability and longer life. The transformer meets DOE 2016 efficiency standards. The combination of low temperature rise and high efficiency makes this unit suitable for use in electrical rooms, air conditioned spaces in buildings, underground vaults, and similar locations, in addition to outdoor areas.
Insulation Fluid: The MT-PML-R7-1P-GMR-100KVA-SZ-LT-DF-A6-BM-CS-2L4-M2 features mineral oil insulation fluid. We offer transformers with FR-3 oil fluid, if needed.
Gauges: The following gauges are included with the system: liquid level, temperature, and pressure/vacuum gauges. Standard liquid level, temperature and pressure/vacuum gauges are analog, manual reading types. These gauges do not have auxiliary contacts.
Fault Pressure Devices: There are no fault pressure devices on the unit. Fault pressure devices are used to detect high rates of pressure rise within the tank.
Rapid Rise Relay: There are no rapid rise relays on the unit. This safety component is designed for protection when a rapid increase in tank pressure occurs. The relay is suitable for detecting sudden pressure fluctuations above predetermined safe limits.
Surge Arresters: This system comes with high elbow surge arresters on the primary side. Designed for over-voltage and transient voltage protection, the components prevent damage caused by lightning, internal switching, or voltage surges. We can offer models without high elbow surge arresters that have mounting provisions for customer-provided surge arresters.
Load Break Switch: The MT-PML-R7-1P-GMR-100KVA-SZ-LT-DF-A6-BM-CS-2L4-M2 is equipped with a load break switch. This switch has four positions: A side on + transformer on, B side on + transformer on, A and B sides + transformer on, and A and B sides + transformer off.
Valves: The MT-PML-R7-1P-GMR-100KVA-SZ-LT-DF-A6-BM-CS-2L4-M2 is equipped with a fill valve and drain valve with sampler port.
Protection Fuses: This transformer equipped with a replaceable, oil immersed, high-voltage weak link fuse accessible behind the high-voltage bushing. The access opening to the weak link fuse is large enough and the high voltage leads of sufficient length to permit the replacement of the fuse.
Mount: The heavy-duty enclosure makes the unit suitable for both indoor and outdoor applications. This power distribution system can be pad mounted on concrete pads.
Benefits: The MT-PML-R7-1P-GMR-100KVA-SZ-LT-DF-A6-BM-CS-2L4-M2 pad mount transformer offers many benefits to consumers. This transformer provides owners with significant energy savings, as well as offering environmental benefits. Higher efficiency not only extends the life of the transformer, but also turns into cost savings for owners in the form of lower energy bills and decreased cost of ownership.
Applications: General purposes, industrial sites, electrical rooms, underground vaults, manufacturing facilities, steel plants, offshore, commercial, military, processing plants, electric power distribution, utilities, public locations, and more. Larson Electronics is a manufacturer and as such can build stationary and portable transformer systems to your specifications. Although we carry several models of power distribution transformer systems, we can deliver custom ordered units almost as quickly as our prebuilt units. If this model does not meet your needs, please contact us at 1-800-369-6671 or sales@larsonelectronics.com to discuss your specific requirements.

Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671


www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.498.3364

Frequently Asked Questions (FAQ)


NO PCBs
LARSONELECTRONICS.COM
877-875-2747
sales@larsonelectronics.com
WARNING
HAZARDOUS VOLTAGE INSIDE
KEEP OUT!
WARNING
NOTICE

Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.498.3364

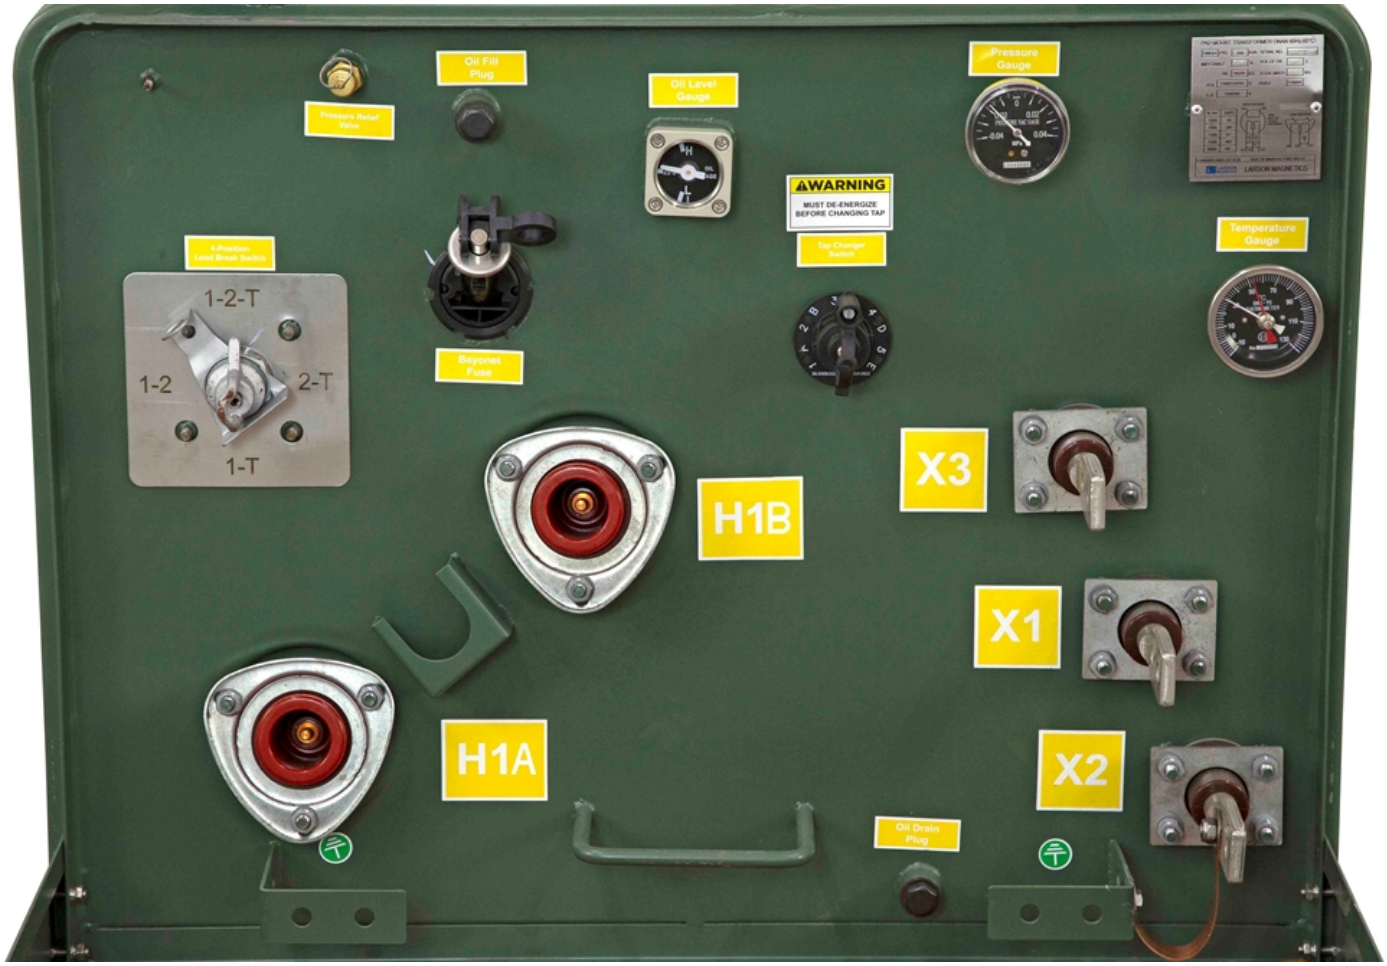





Harmonized System (HS) Code: 85043300
Export Control Classification Number (ECCN): EAR99

Links (Click on the below items to view):

- ANSI Certificate 1
- ANSI Certificate 2
- ASTM Certificate 1
- Catalog Page - Product Series
- Concrete Pad Dimensional Drawing
- FCC Certificate (Federal Communications Commission, USA)
- MSDS (Material Safety Data Sheet
- Operations Manual
- HigResPic1
- HigResPic2
- HigResPic3
- HigResPic4
- HigResPic5
- Video1
- Video2
- Video3
- Video4
- ISO 9001 Certification
- Business Certificate
- Shipping Time Map