Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.498.3364

EPL-QP-1X150RT-140DB-100

150W Explosion Proof LED Light Tower - Tripod Mount - C1D1 - 100' 16/3 Cord w/ EXP Plug

Product ID: 147140

Please see last page for supporting documentation for this product(certificates, CAD files & drawings, IES files, wiring diagrams, etc).



Larson Electronics LLC manufactures a wide variety of products, including custom built to spec designs. The pictures displayed for this unit are a general representation of form factor for the product line and may not accurately represent this exact configuration in every detail due to custom builds and changes between similar products in our standard catalog. The specifics for this configuration are listed in the specification table and supporting documentation (CAD files, Dimensional Drawing, Name Plate Diagram, Wiring Diagram, etc.). This means that specific details (receptacles, plugs, wires, connections, mounting brackets, external finishes, etc.) may not be accurately represented in images vs specifications. Please review specifications and do not order based solely on images.

EPL-QP-1X150RT-140DB-100 Explosion Proof LED Tripod Tower

Listing: United States & Canada
Lamp Type: Cree LED
Dimensions: 14"W x 16"H x 5"D - Light Head; 6.8 to 9.42 Extendible Tower
Weight: 50 lb
Voltage: 120-277 VAC, 50/60Hz
Total Watts: 150 watts
Total Lumens: 21,000
Luminous Efficiency: 140 Lm/W
Lamp Life: 60,000+ Hours
Color Temp: 5600K, 5000K, 4500K, 4000K, 3500K, 3000K, 2700K, or 6500K
Color Rendering Index: >75 CRI
Beam Angle: 60°, 125°, or 140°
Lighting Configuration: Flood Pattern
Power Efficiency: >95%
Power Factor: 0.992
Amperage: 1.25 A @ 120 V, 0.63 A @ 240 V, 0.54 A @ 277 V
Ambient Operating Temp Range: -50°C to +65°C
Operating Temp Rating: T5
Lamp Housing Material: Copper Free Cast Aluminum
Tripod Material: Non-Sparking Aluminum Tubing w/ Rubber Casters
Lens Material: Hardened Borosilicate Glass
Gasket Material: Silicone
Mounting: Non-Sparking Wheeled Aluminum Tripod
Wiring: 100` 16/3 SOOW Cable w/ Explosion Proof Cord Cap
Cord Cap Options: 5-15P, 5-20P or 6-20P

Ratings/Approvals

Listed for United States and Canada
Class I, Divisions 1 & 2, Groups C and D
Class II, Divisions 1 & 2, Groups E, F, & G
Class III, Divisions 1 & 2
Certified to UL 844 Ed. 13
Certified to UL 1598
Certified to C22.2 No. 137 Rev 2009
Certified to C22.2 No. 250.0
T5 Temperature Rating
Paint Spray Booth Approved
IEC 60529 Tested
IP67 Rated Waterproof
LEL Approved
Multiple Driver Banks
80% Lumen Retention after 60,000 Hours
Factory Sealed Light Fixture
Class I Div 1 Explosion Proof Plug
100 Foot 16/3 SOOW Cord
Wheeled Adjustable Tower 6.8 - 9.42 Feet
Direct Replacement for 400W MH Towers

Special Orders - Special Requirements

Contact us for special requirements

Toll Free: 1-800-369-6671
Intl: 1-903-270-1187

Fax: 1-903-498-3364

E-mail: sales@larsonelectronics.com

Made in the USA

The EPL-QP-1X150RT-140DB-100 from Larson Electronics is a Tripod Mounted Explosion Proof LED Light Tower that produces 21,000 lumens of light capable of illuminating an area 9,500 square feet in size. This adjustable Cree® LED light tower is designed for portability and durable operation and ideal for use in demanding conditions.

PLEASE NOTE: ANY FREE SHIPPING OFFERS DO NOT APPLY TO LIGHT MASTS, LIGHT TOWERS, OR TRIPODS

The EPL-QP-1X150RT-140DB-100 is a tripod mounted explosion proof LED lighting system and provides 9,500 square feet of work area coverage with 21,000 lumens of light output. This portable LED light tower has a removable LED light head mounted on top of a three leg durable non-sparking aluminum tripod equipped with wheels for easy positioning of the unit from one area of the workspace to another. The LED light head on this unit produces a wide flood pattern of light that is ideal for illuminating large workspaces and job sites. This light is designed for heavy duty use in demanding conditions including emergency services, mining, construction, marine, and industrial operations where durability and reliability is critical.

This portable LED light is comprised of an adjustable LED light head mounted atop a three leg tripod fabricated from non-sparking powder coated aluminum. This adjustable and collapsible tripod can be extended to 9.42 feet, collapsed to 6.8 feet, and includes solid wheels allow the operator to tilt the unit back and simply roll the entire assembly to a new location when fully deployed. The LED light fixture assembly can be removed by releasing the hand knob and sliding the light and mounting bracket off of the center support while the legs can be collapsed, aiding in deployment, storage and transport. The lamp can be easily adjusted vertically and locked into position.



Click Photo to Enlarge




Click Photo to Enlarge




Click Photo to Enlarge

The explosion proof LED light fixture features multiple LED drivers which helps to increase the operational life of the fixture. With traditional LED lights, in the event an LED array or driver fails, the entire fixture no longer illuminates. This new series of LED lamps contains twelve individual LED boards configured in a series of banks. Each bank contains two LED boards with an individual driver. In the event of a driver failure, only one bank of LEDs will be effected while the other banks will continue to operate. In the event that of an LED failure, the mating LED will continue to operate.


Click Photos to Enlarge

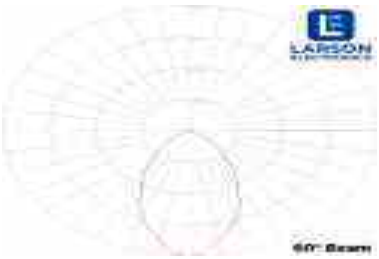

60° Beam Angle

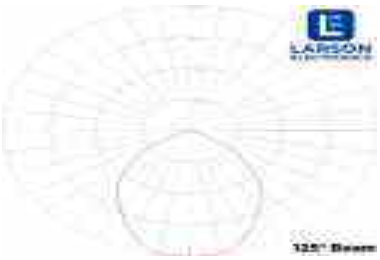

125° Beam Angle

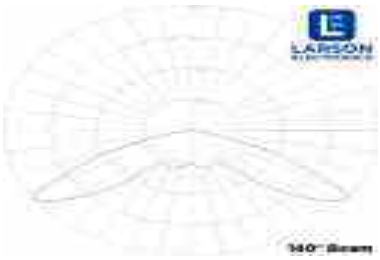

140° Beam Angle

Beam Angles: When used as a portable lighting solution, the varying beam angles are each individually ideal for several environments. The 60° beam provides the most intense beam of the three options. It is perfect for narrow, confined spaces and is ideally suited for tank cleaning purposes. It offers focused light to provide ample illumination to tight work spaces and other environments. The 125° beam offers a more diffused source of light that is also less intense in brightness. It is a great general area work light and performs well when used for outdoor illumination. The 140° beam offers a very wide lighting pattern and is ideal for situations where lighting distance is not a concern, but illumination of a wider area and even light distribution is. The 140° beam is great for situations that call for working in close proximity to lights such as in a paint booth.

LED Benefits: Unlike gas burning and arc type lamps that have glass bulbs, LEDs have no filaments or fragile housings to break during operation and/or transportation. Instead of heating a small filament or using a combination of gases to produce light, light emitting diodes (LEDs) use semi-conductive materials that illuminate when electric current is applied, providing instant illumination with no warm up or cool down time before re-striking. Because there is no warm up period, this light can be cycled on and off with no reduction in lamp life.

LED lights run at significantly cooler temperatures than traditional metal halide and high pressure sodium lights and contain no harmful gases, vapors, or mercury, making them both safer and more energy efficient. No extra energy is wasted in cooling enclosed work areas due to external heat emissions from bulb type lights, and the operator risks associated with traditional lighting methods, such as accidental burns and exposure to hazardous substances contained in the glass bulbs, are eliminated. In addition, LEDs are also safer for the environment as they are 100% recyclable, which eliminates the need for costly special disposal services required with traditional gas burning and arc type lamps.

The LED light head on this tower contains twelve 12.5 watt LEDs producing 140 lumens each. These LEDs are arranged in rows and paired with high purity optics to produce 21,000 lumens and a flood beam while only drawing 1.25 amps on 120V, making these units ideal for use as highly efficient yet powerful work and area lights. The EPL-QP-1X150RT-140DB-100 hazardous location LED light is an ideal and direct replacement for fragile and hot running 400 watt metal halide floodlights.

Click Photos to Enlarge



5-15 Straight Blade Plug



5-20 Straight Blade Plug



6-20 Straight Blade Plug

Wiring & Plug: This explosion proof tower mounted flood lighting system is equipped with 100 feet of 16/3 chemical and abrasion resistant SOOW cord that is fitted with an explosion proof cord cap for easy connection to explosion proof outlets. Plug options include a 5-15 15 amp straight blade plug for use with 120V explosion proof outlets, a 5-20 20 amp straight blade plug for use with 120V explosion proof outlets, or a 6-20 20 amp straight blade plug for use with 220-240V explosion proof outlets.

Tower Mount: This unit is mounted on an aluminum tripod with anti-static urethane wheels for seamless transportation around the work site. The light tower can be extended to a maximum height of 9.42 feet and retracted down to 6.8 feet. Components used for height adjustments during deployment are conveniently located at chest level, allowing operators to make changes to lighting setups and configurations with ease. This tripod is suitable for portable, temporary, and stationary mounting of equipment. A round-pole design makes the assembly easier to handle and transport

compared to square-shaped models.
A horizontal T-mount platform is provided at the top of the tower for mounting customer-provided equipment. The tripod features a rotatable head for quick repositioning of mounted equipment, without needing to turn the base legs or entire tower. To adjust the vertical tilt and position of mounted fixtures, operators simply loosen both brackets (located at both sides of the light). After the desired position is achieved, the brackets are tightened. An accessible hand knob can be used to remove the mounted fixture for storage or transportation.
The base of the lightweight tower consists of three 49.1" legs, with an even 120° spread for a balanced foundation. All three legs are fold-able, which caters to space-saving requirements during storage and allows the assembly to pass through tight spaces. Unlike tripods with bent or L-shaped legs, this portable light tower incorporates a flat foundation for a sturdy base. The tower`s base is also equipped with two wheels for freedom of movement at industrial facilities, as well as streamlined setup and tear-down at remote work sites. Removal of the wheel kit can be completed without special tools.
All tripods are in stock and ready to be shipped for customers with immediate lighting or mounting needs. For fast and cost-effective deliveries, the entire light tower assembly can be shipped via UPS. Freight and expedited hotshots commonly associated with light mast deliveries are not needed for this compact tower.
Voltage: This light is universal voltage capable and can be operated with 100-277 VAC, 50/60Hz. We also offer a low voltage version of this LED fixture that operates on AC/DC voltages from 11-25 Volts and in-line step-down transformers for high voltage to low voltage operations.
This explosion proof LED light fixture is IP67 rated, dust-proof, and protected against high pressure jets and temporary submersion. The cast aluminum body and LED lamp give this light excellent durability and resistance to vibration and impacts. The housing is specially designed to dissipate heat which increases the efficiency and lifespan of the LEDs and electronics. This LED light produces 21,000 lumens with a color temperature of 5000K, 4000K, or 3000K and a color rendering index of 75 which produces colors and details much more accurately than high pressure sodium or mercury vapor portable work lights. This LED light tower retains 80% of its lumen output after 60,000 hours of use, far longer than metal halide or halogen work lamps.
The LED light head on this unit is small enough to allow it to fit through most standard size manholes and entry points. The LED light head can also be removed from the tripod, the tower collapsed and the entire assembly passed through a manhole and reassembled once inside. The easy to collapse design of this Class I Division 1 LED work light allows Larson Electronics to avoid pallet freight charges when shipping and deliver these units via UPS next day air service, which in turn improves delivery time and reduces the cost to buyers.
At Larson Electronics, we do more than meet your lighting needs. We also provide replacement, retrofit, and upgrade parts as well as industrial grade power accessories. Our craftsmen can custom build any lighting system and/or accessories to fit the unique demands of your operation. A commitment to honesty, quality, and dependability has made Larson Electronics a leader in the lighting and electronics business since 1973. Contact us today at 800-369-6671 or message sales@larsonelectronics.com for more information about our custom options tailored to meet your specific industry needs.

Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.498.3364

Frequently Asked Questions (FAQ)



Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.498.3364



Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.498.3364



Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.498.3364



Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.498.3364

EPL-QP-1X150RT-140DB-100

Product ID: 147140

Export Control Classification Number (ECCN): EAR99

Options:

EPL-QP-1X150RT-140DB-100-Beam Angle-Color Temp

Example: EPL-QP-1X150RT-140DB-100-60B-56K

Beam Angle	
60°	-60B
125°	-125B
140°	-140B

Color Temp	
5600K	-56K
5000K	-50K
4500K	-45K
4000K	-40K
3500K	-35K
3000K	-30K
2700K	-27K
6500K	-65K

Links (Click on the below items to view):

- **Beam Information (Coverage, Datafile)**
- **Canadian CEC Certificate (Commonly referred to as CSA Certificate)**
- **CE Certificate**
- **Certificate 1, Misc**
- **Certificate 2, Misc**
- **Certificate 3, Misc**
- **MSDS (Material Safety Data Sheet**
- **RoHS Certificate (Restriction of Hazardous Substances)**
- **USA NEC Certificate (Commonly referred to as UL Certificate)**
- **HigResPic1**
- **HigResPic2**
- **HigResPic3**
- **HigResPic4**
- **HigResPic5**
- **HigResPic6**
- **HigResPic7**
- **Video1**
- **Video2**
- **Video3**
- **ISO 9001 Certification**
- **Business Certificate**
- **Shipping Time Map**