

EPLC2-STCH-150LED-RT

150W Explosion Proof Mount LED Light Fixture - Threaded Stanchion Mount - C2D1/C1D2

Product ID: 147994

Please see last page for supporting documentation for this product(certificates, CAD files & drawings, IES files, wiring diagrams, etc).



Larson Electronics LLC manufactures a wide variety of products, including custom built to spec designs. The pictures displayed for this unit are a general representation of form factor for the product line and may not accurately represent this exact configuration in every detail due to custom builds and changes between similar products in our standard catalog. The specifics for this configuration are listed in the specification table and supporting documentation (CAD files, Dimensional Drawing, Name Plate Diagram, Wiring Diagram, etc.). This means that specific details (receptacles, plugs, wires, connections, mounting brackets, external finishes, etc.) may not be accurately represented in images vs specifications. Please review specifications and do not order based solely on images.

EPLC2-STCH-150LED-RT Threaded Stanchion Mount LED Light Fixture

Lamp Type: Cree LED

Dimensions: 16"W x 22"H x 18"D

Weight: 35lbs

Total Watts: 150W

Total Lumens: 21,000

Voltage: 100-277V AC, 50/60Hz or 11-25V AC/DC

Beam Angle: 60°, 125°, or 140°

Lighting Configuration: Flood Pattern

Color Temp: 5600K, 5000K, 4500K, 4000K, 3500K, 3000K, 2700K, or 6500K

Lamp Life: 60,000+ Hours

Temp Rating: T5 -40°C to +65°C

Mounting: Threaded Stanchion Mount w/ Adjustable Bracket

Mount Size Options: 1-1/4" NPT, 1-1/2" NPT or 2" NPT

Ratings/Approvals

Class I Division 2 Groups C and D

Class II Divisions 1 & 2 Groups E, F and G

Class III Divisions 1 & 2

CSA Certified to C22.2 No.137-M81

cETL Certified to UL844 and C22.2 Standards

T5 Temperature Rating

Special Orders - Special Requirements

Contact us for special requirements

Toll Free: 1-800-369-6671

Intl: 1-903-270-1187

Fax: 1-903-498-3364

E-mail: sales@larsonelectronics.com

Made in the USA

The EPLC2-STCH-150LED-RT from Larson Electronics is an Explosion Proof Threaded Stanchion Mount LED Light Fixture that provides operators with a powerful and energy efficient alternative to traditional hazardous location luminaries. Cree LED technology and compact design makes this lamp an excellent replacement upgrade option for bulky and high maintenance cost older fixtures.

This Class I Division 2, Class II Division 1 & 2 threaded stanchion mount explosion proof LED light fixture provides 21,000 lumens of high quality light while drawing only 150 watts. The copper free aluminum alloy body is powder coated for added durability and an attractive aesthetic appearance. Special heat dissipating design in conjunction with LED technology helps this fixture to achieve an excellent 60,000 hour rated lifespan with 80% lumen retention. Light weight and a low profile make this unit an attractive alternative to larger and heavier older fixtures and requires less hardware to install.

The EPLC2-STCH-150LED-RT threaded stanchion mount explosion proof LED light fixture features an adjustable swivel bracket constructed of 3/8" aluminum that allows 270° of adjustment and designed to securely mount to threaded rigid pipe. The threaded stanchion mount is available in 1-1/4", 1-1/2" or 2" NPT sizes. The wiring of the EPLC2-STCH-150LED-RT is terminated in a junction box with 3/4" threaded hub. Operators can run rigid pipe or flexible conduit to the junction box, terminating the electrical connections within.


The explosion proof LED light fixture features multiple LED drivers which helps to increase the operational life of the fixture. With traditional LED lights, in the event an LED array or driver fails, the entire fixture no longer illuminates. This new series of LED lamps contains twelve individual LED boards configured in a series of banks. Each bank contains two LED boards with an individual driver. In the event of a driver failure, only one bank of LEDs will be effected while the other banks will continue to operate. In the event that of an LED failure, the mating LED will continue to operate.

LED Benefits: Unlike gas burning and arc type lamps that have glass bulbs, LEDs have no filaments or fragile housings to break during operation and/or transportation. Instead of heating a small filament or using a combination of gases to produce light, light emitting diodes (LEDs) use semi-conductive materials that illuminate when electric current is applied, providing instant illumination with no warm up or cool down time before re-striking. Because there is no warm up period, this light can be cycled on and off with no reduction in lamp life.

LED lights run at significantly cooler temperatures than traditional metal halide and high pressure sodium lights and contain no harmful gases, vapors, or mercury, making them both safer and more energy efficient. No extra energy is wasted in cooling enclosed work areas due to external heat emissions from bulb type lights, and the operator risks associated with traditional lighting methods, such as accidental burns and exposure to hazardous substances contained in the glass bulbs, are eliminated. In addition, LEDs are also safer for the environment as they are 100% recyclable, which eliminates the need for costly special disposal services required with traditional gas burning and arc type lamps.

The aluminum body and LED lamp give this light excellent durability and resistance to vibration and impacts. The housing is specially designed to dissipate heat which increases the efficiency and lifespan of the LED luminaries. The LED lamp produces 21,000 lumens with a color temperature of 5000K, 4500K, or 3000K and a color rendering index of 70 which produces colors and details much more accurately than high pressure sodium or mercury vapor luminaries. The lamp is T5 temperature rated, Design Lights Consortium approved, and the LED light head retains 80% of its lumen output after 60,000 hours of use, far longer than incandescent or fluorescent lamps.

[Click Photos to Enlarge](#)

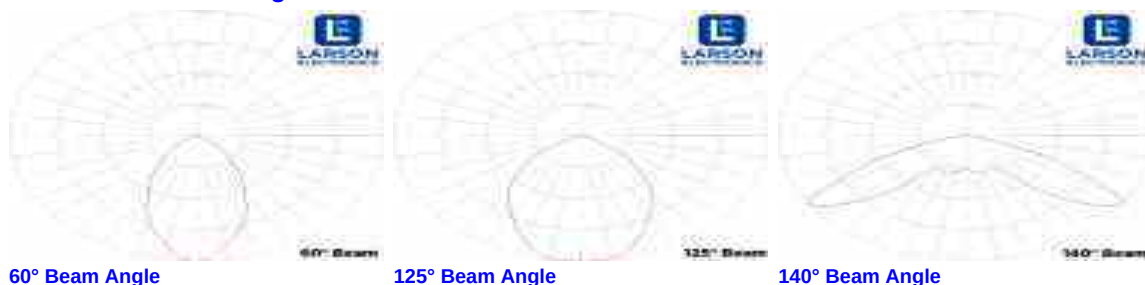

Beam Angles: When used as a portable lighting solution, the varying beam angles are

each individually ideal for several environments. The 60° beam provides the most intense beam of the three options. It is perfect for narrow, confined spaces and is ideally suited for tank cleaning purposes. It offers focused light to provide ample illumination to tight work spaces and other environments. The 125° beam offers a more diffused source of light that is also less intense in brightness. It is a great general area work light and performs well when used for outdoor illumination. The 140° beam offers a very wide lighting pattern and is ideal for situations where lighting distance is not a concern, but illumination of a wider area and even light distribution is. The 140° beam is great for situations that call for working in close proximity to lights such as in a paint booth.

The EPLC2-STCH-150LED-RT threaded stanchion mount explosion proof LED flood light is universal voltage capable and can be operated with 100-277 VAC, 50/60Hz. We also offer a low voltage version of this LED fixture that operates on AC/DC voltages from 11-25 Volts. This explosion proof LED light fixture is IP67 rated, dust-proof, and protected against high pressure jets and temporary submersion. The cast aluminum body and LED lamp give this light excellent durability and resistance to vibration and impacts. The housing is specially designed to dissipate heat which increases the efficiency and lifespan of the LEDs and electronics.

The entire assembly is ETL listed Class I Division 2 and Class II Divisions 1 & 2 for use in hazardous locations and approved for paint spray booths. The extreme durability, universal voltage capabilities, and LED longevity make this LED flood lighting system an ideal fit for frac pads, rigs, offshore, and any application that requires a Class I Division 1 threaded stanchion mount light fixture.

Mounting Notes: The EPLC2-STCH-150LED-RT threaded stanchion mount explosion proof light features an adjustable swivel bracket constructed of 3/8" aluminum that allows over 270° of adjustment and is designed to securely mount on threaded rigid pipe. The threaded stanchion mount is built to customer's specs, enabling operators to mount this explosion proof LED light to their specific pole size. For example, selecting a 2" OD mount means that the fixture will fit onto threaded pipes with a 2" OD.

At Larson Electronics, we do more than meet your lighting needs. We also provide replacement, retrofit, and upgrade parts as well as industrial grade power accessories. Our craftsmen can custom build any lighting system and/or accessories to fit the unique demands of your operation. A commitment to honesty, quality, and dependability has made Larson Electronics a leader in the lighting and electronics business since 1973. Contact us today at 800-369-6671 or message sales@larsonelectronics.com for more information about our custom options tailored to meet your specific industry needs.

High Quality Features

1. Low power consumption.
2. Instant on/off operation.
3. Fixture constructed of extruded corrosion resistant copper free aluminum alloy.
4. Superior color rendering compared to HPS, LPS, MV.
5. Retains 80% lumen output after 60,000 operating hours.
6. Powder coated aluminum fixture body.
7. Threaded stanchion mount for easy installation.
8. Low profile - Light weight
9. 21,000 Lumen output from only 150 watts

Superior LED Benefits

1. 60,000 hour lifespan.
 2. Can SAVE 50% or more on energy.
 3. Qualifies retrofit projects for financial incentives, including utility rebates, tax credits and energy loan programs.
 4. Reduces energy use and prolongs life-spans of peripheral cooling units (A/C, refrigeration)
 5. 100% recyclable.
 6. No toxins-lead, mercury.
 7. No UV light, infrared radiation or CO2 emissions.
 8. Qualifies buildings for LEED and other sustainable business certifications.
 9. Bright, even light maintains consistent color over time.
 10. Instant on/off - No flickering, delays or buzzing.
 11. Very good color rendering.
 12. Vibration/impact resistant.
 13. Significantly cooler operation.
 14. Less frequent outages, higher output improves workplace safety.
-




Frequently Asked Questions (FAQ)







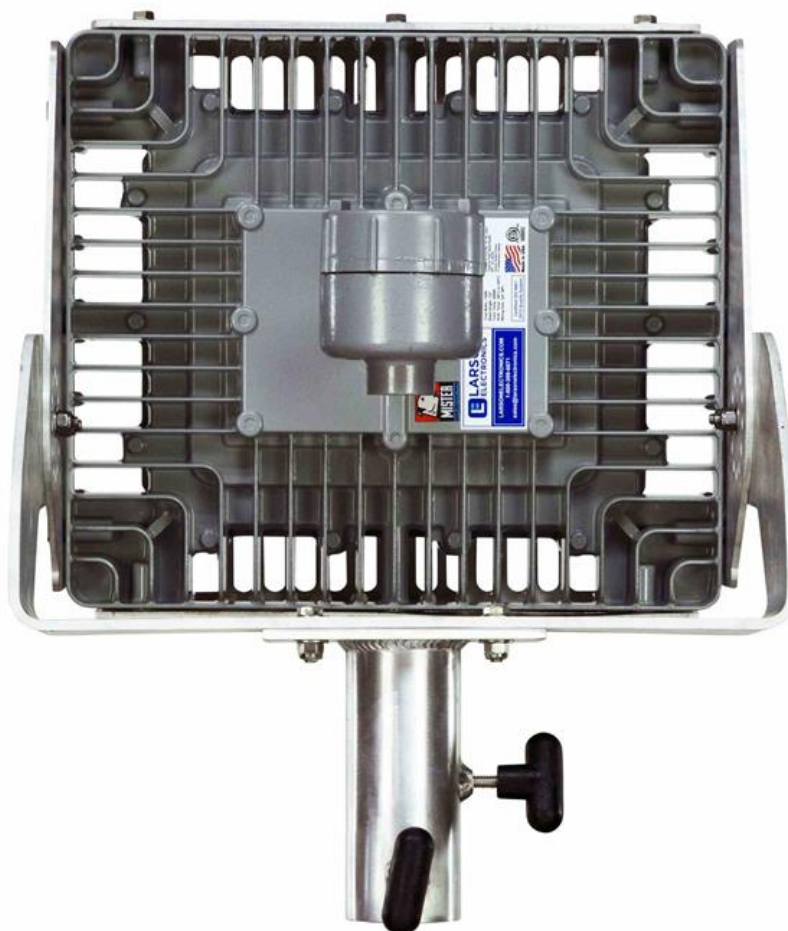

EPLC2-STCH-150LED-RT

Product ID: 147994

Harmonized System (HS) Code: 9405.41.84.10

Export Control Classification Number (ECCN): EAR99

Options:

EPLC2-STCH-150LED-RT-**Mount**-**Voltage**-**Beam & Color**

Example: EPLC2-STCH-150LED-RT-**1.25in**-**1227**-**60DB.50K**

Mount	
1 1/4	-1.25in
1 1/2	-1.5in
2	-2in

Voltage	
120-277V AC	-1227
11-25V AC/DC	-1224

Beam & Color	
60°-5000K	-60DB.50K
60°-4500K	-60DB.45K
60°-3000K	-60DB.30K
125°-5000K	-125DB.50K
125°-4500K	-125DB.45K
125°-3000K	-125DB.30K

Links (Click on the below items to view):

- [Operations Manual](#)
- [HigResPic1](#)
- [HigResPic2](#)
- [HigResPic3](#)
- [HigResPic4](#)
- [HigResPic5](#)
- [HigResPic6](#)
- [HigResPic7](#)
- [HigResPic8](#)
- [HigResPic9](#)
- [HigResPic10](#)
- [Video1](#)
- [Video2](#)
- [Video3](#)
- [ISO 9001 Certification](#)
- [Business Certificate](#)
- [Shipping Time Map](#)