

MT-PML-R7-1P-GMR-50KVA-SZ-LT-DF-A6-BB-CZ-2BP4-M1

50 KVA Pad Mount Transformer - 12470Y/7200 Grounded Wye Primary, 240/120V Secondary - Biodegradable Fluid /KNAN

Product ID: 294633

Please see last page for supporting documentation for this product(certificates, CAD files & drawings, IES files, wiring diagrams, etc).



Larson Electronics LLC manufactures a wide variety of products, including custom built to spec designs. The pictures displayed for this unit are a general representation of form factor for the product line and may not accurately represent this exact configuration in every detail due to custom builds and changes between similar products in our standard catalog. The specifics for this configuration are listed in the specification table and supporting documentation (CAD files, Dimensional Drawing, Name Plate Diagram, Wiring Diagram, etc.). This means that specific details (receptacles, plugs, wires, connections, mounting brackets, external finishes, etc.) may not be accurately represented in images vs specifications. Please review specifications and do not order based solely on images.

MT-PML-R7-1P-GMR-50KVA-SZ-LT-DF-A6-BB-CZ-2BP4-M1 Pad Mount Transformer

Transformer Type: Pad Mounted, Compartmental-Type II

Transformer Configuration: Liquid Filled Pad Mounted

Transformer Feed Type: Loop Feed

Polarity: Additive

Phase: Single Phase (Connects to 3-Phase electrical grid)

Capacity: 50 KVA

Vector Group: II6

Primary Voltage: 12470GrdY/7200

Primary Voltage Switch: N/A

Primary Voltage Class: 15 kV Class

Primary Phasor: Grounded Wye

Primary BIL: 95 KV

Secondary Voltage: 120/240 (L-N-L)

Secondary Voltage Class: 1.2 kV Class

Secondary Phasor: Dual Winding Single Phase

Secondary BIL: 30 KV

Frequency: 60 Hz

Temperature Rise: 65°C

Insulation Rating: Class E Insulation - 120°C, 248°F

Cooling Class: ONAN; Self-Cooled

Forced Air (Fans): None

Tap Changer: 5-Position Tap Changer, Hot Stick Operable

Tap Qty: (2) FCAN Above Taps, (2) FCBN Below Taps

Tap %: 2.50%

Tap Changer Switch Rating: 200-Amp, 15 kV

Ratings

Meets/Exceeds DOE 2016 Efficiency Ratings

Meets/Exceeds CSA Efficiency Ratings

Complies with ANSI / IEEE C57.12.00

Complies with ANSI / IEEE C57.12.21

Complies with ANSI / IEEE C57.12.25

Complies with ANSI / IEEE C57.12.28

Complies with ANSI / IEEE C57.12.29

Complies with ANSI / IEEE C57.12.35

Complies with ANSI / IEEE C57.12.38

Complies with ANSI / IEEE C57.12.70

Complies with ANSI / IEEE C57.12.110

Complies with ANSI / IEEE C57.12.131

Complies with ANSI / IEEE C62.11

Complies with ANSI / IEEE C62.22

Complies with ANSI / IEEE 386

Complies with ANSI / IEEE C2

Complies with ANSI / IEEE C37.47

Complies with ANSI Z535.4

Complies with ASTM D3487

Complies with ASTM D6871

Complies with NEMA 260-1996

Complies with 10 CFR Part 431

Complies with CSA C2.1-06

Complies with CSA C50

Complies with CSA C88

Tap Changer Switch Location: Front Compartment, High Voltage (HV) Left Side

Impedance: 1.4-2.4% Typical

Primary Connection Type: Dead Front

Primary Termination Arrangement: ANSI Type II Arrangement

Primary Termination: Externally Clamped Well Bushings w/ Removable Studs, 200A Load Break Elbows w/ Inserts

Primary Connection Qty: (2) Primary Connections for use w/ Elbow Connectors

Primary Parking Stand Qty: (2) Welded Bracket for Installing Accessory Parking Stand Bushings

Primary Bushing Rating: 15 kV Class, 95 kV BIL, 200A, Load Break, IEEE 386 Color Red

Primary Surge Arrestors: (1) High Voltage Elbow Surge Arrestors, Included

Primary Surge Arrestor Voltage Rating: 10 kV Class

Primary Surge Arrestor MCOV Rating: 8.4 kVrms

Primary Over Current Protection (OCP): Bayonet Expulsion Fuse in series w/ Partial-Range Current-Limiting Fuse

Primary Over Current Protection Method: Fused, Oil-Immersed

Primary Over Current Protection Holder: Bayonet Fuse Holder w/ Flapper Valve and External Drip Shield

Primary Neutral Connection: Primary H2 Neutral Internally Bonded to Tank

Primary Grounding Provisions: (1) Welded Ground Bung, 1/2"-13 UNC Tapped Hole, 7/16" Deep Bung, w/ Grounding Terminal Clamp for 2/0-8 AWG Stranded Wire

Secondary Connection Type: Live Font

Secondary Termination Arrangement: ANSI Type II Arrangement

Secondary Connections: NEMA Spade Terminals, 4-Hole Spade, Accepts up to (4) Single Lug connections with (1) cables per side of Spade connector

Secondary Over Current Protection (OCP): 250A 2P Circuit Breaker

Secondary Connections: NEMA Spade Terminals, 4-Hole Spade, Externally Clamped, Accepts up to (4) Single Lug connections with (1) cables per side of Spade connector

Secondary Connection Qty: (3) Externally Clamped One-Piece Epoxy Bushings w/ 5/8"-11 x 1-1/2" Long Copper Threaded Studs

Secondary Neutral Connection: Secondary X2 Neutral Grounded to Tank via 1/2"-13 UNC Tapped Hole, 7/16" Deep Bung & Copper Ground Strap

Secondary Grounding Provisions: (1) Welded Ground Bung, 1/2"-13 UNC Tapped Hole, 7/16" Deep Bung, w/ Grounding Terminal Clamp for 2/0-8 AWG Stranded Wire

Metering Current Transformer (CT): N/A

Metering Panel: N/A

Auxiliary Control Panel : N/A

Load Break Switch: 4-Position LBOR, Hot Stick Operable

Load Break Switch Qty: 1

Load Break Switch Rating: 200-Amp, 15 kV

Load Break Switch Location: Front Compartment

Efficiency Standard(s): Meets DOE 2016 Standards, Meets CSA Standards Meets ANSI/IEEE Standards

K-Factor Rating (Harmonic Mitigation): K-1 (Standard)

Pulse Drive Rating: N/A

Insulation Fluid: Biodegradable Natural Vegetable Oil Ester Insulating Fluid - Non-PCB Fluid

Fluid (Oil) Capacity*: 61.11 Gallons

Fluid (Oil) Weight*: 551.15 lb

Liquid Level Indicator: Analog Gauge

Temperature Indicator: Analog Gauge

Pressure/Vacuum Indicator: Analog Gauge

Pressure Relief Device: Automatic Action, Cracking Pressure @ 10 PSIG, Releasing Pressure @ 8 PSIG, Flow @ 15 PSIG (50 SCFM) @ 14.7 PSIG

Fault Indicator: N/A

Gas Sampler Valve: N/A

Fill Valve: 1/2" NPT w/ Removable Bolt Plug

Fill Valve Location: Front Compartment

Drain Valve: 1/2" NPT w/ Removable Bolt Plug, w/o Sampler Valve

Drain Valve Location: Front Compartment

Winding Material: Copper

Ambient Temperature Rating: 40°C

Ambient Operating Temperature Range: -40°C to +40°C (-50°F to +104°F)

Sound Level: 48 dBA

Elevation (Altitude): 3300ft (1000 meters) Above Sea Level or Below

Core Material: Grain Oriented Steel

Tank Material: Coated Steel

Cabinet Material: Coated Steel

Base Platform Material: Coated Steel

Portability: Lifting lugs

Complies with CSA C88.1

Complies with CSA C88-16

Complies with CSA C227.3

Complies with CSA C802.1

Complies with CSA C802.2

Complies with CSA C802.3

Features

Pentahead Bolt Entry Assembly

High-Fire Point Insulating Fluid

Non-PCB Insulating Fluid

Tamper Proof Housing

NEMA 3R Wiring Compartment

Lift-Up Pad lockable Lid

Efficiency: 98.90%

Based on transformer operating at 50% of nameplate base kVA.

Load Losses Based on 85°C Reference Temp.

No Load Loss (in watts)*: +/- 176W

Load Loss (in watts)*: +/- 650W

Total Load Loss (in watts)*: +/- 826W

Note: Losses offered are typical only, not guaranteed

Labeling:

Externally Stencilled (Painted) KVA Rating

Externally Stencilled (Painted) Voltage Rating

External Non-PCB Label

External Warning & Danger Label

External Barcode Label

Internal Busing & Accessory Labeling

Stainless Steel Riveted Nameplate

Factory Tests:

Winding Resistance Test

Insulation Resistance Test

Voltage Ratio Error Test

Short-circuit Impedance Test

No-load Loss (Wattage) Test

Load Loss (Wattage) Test

Induced Voltage Withstand Test

Separate Source Voltage Withstand Test

Pressure Integrity Test Test

Shipping:

Shipped on pallet on open flatbed

Palletized on Wooden Pallet w/ Skid Pockets

Pallet Skid Facing Outward Sides of Truck

Note: For low quantity purchases, enclosed truck can be requested

Note: Crated shipping in lieu of palletizing can be done upon request for an additional fee

Housing Type: Low Profile Air-Filled Cabinet w/ Locking Hinged Door, HV/LV in Same Compartment, Tamper Resistant, w/ Pad-lockable Lift-up Lid

Enclosure Rating: NEMA 3R Weatherproof Wiring Cabinet, Sealed Tank

Paint Type: Weatherproof and UV Resistant Epoxy Coating and Undercoating

Finish Color: Munsell™ 7.0 GY 3.29/1.5 Bell Green

Mounting: Pad Mount

Conduit Opening: Bottom Feed Underground Entry/Exit

Compartment Base Wireway Dimensions*: 34"-L x 21"-D

Compartment Cabinet Depth: 19"-D

Dimensions*: 34.25"-W x 37.4"-D x 25.2"-H

Dry Weight (w/o Oil)*: 507.05 lb

Total Weight (Liquid Filled)*: 1432.98 lb

*Please note that numbers are approximate and subject to change

Special Orders - Special Requirements

Contact us for special requirements

Toll Free: 1-800-369-6671

Intl: 1-903-270-1187

Fax: 1-903-498-3364

E-mail: sales@larsonelectronics.com

The MT-PML-R7-1P-GMR-50KVA-SZ-LT-DF-A6-BB-CZ-2BP4-M1 Industrial Pad Mount Transformer from Larson Electronics offers powerful, reliable and efficient power distribution in indoor, outdoor and public locations. The low operating costs, low heat emissions and low cost of ownership makes this transformer ideal for a wide range of applications and businesses. An enclosed design caters to installations on concrete pads without protective fencing.

****PLEASE NOTE: ANY FREE SHIPPING OFFERS DO NOT APPLY TO POWER DISTRIBUTION PANELS, TRANSFORMERS, OR SUBSTATIONS****

Transformer Features: With a transformer rating of 50 kVA, the industrial transformer features a primary voltage of single-phase 12470Y/7200 Grounded Wye and a secondary voltage of single-phase 240/120V (L-N-L). The unit has a primary loop feed and dead-front primary connections. We also offer systems with radial feed and dead front primary/live front secondary connections. This transformer features a 5-position tap changer with (2) +/- 2.5% taps above and (2) +/- 2.5% taps below to allow small changes for voltage. This pad mount transformer features primary well bushings and standard spade connectors on the secondary side. Equipped with copper windings, this transformer consists of one coil and two core loops.

The MT-PML-R7-1P-GMR-50KVA-SZ-LT-DF-A6-BB-CZ-2BP4-M1 is air cooled and does not have fans or mounting provision for fans. This unit features a 65°C temperature rise for reduced heat waste, increased reliability and longer life. The transformer meets DOE 2016 efficiency standards. The combination of low temperature rise and high efficiency makes this unit suitable for use in electrical rooms, air conditioned spaces in buildings, underground vaults and similar locations, in addition to outdoor areas.

Insulation Fluid: The MT-PML-R7-1P-GMR-50KVA-SZ-LT-DF-A6-BB-CZ-2BP4-M1 features biodegradable cooling fluid (KNAN) that is comparable to FR3 fluid. We offer transformers with mineral oil fluid, if needed.

Biodegradable Fluid: Biodegradable cooling fluid (vegetable oil) has a higher heat capacity compared to mineral oil, making the liquid safer to use and more reliable during operations. Vegetable oil has a higher flash point and fire point than mineral oil, hydrocarbon oil, silicone oil and synthetic ester. This cooling fluid is also non-toxic and can tolerate higher breakdown voltages than mineral oil. When operating at high temperatures, biodegradable cooling liquid sustains up to 120% load conditions, which helps preserve the transformer's lifespan and performance.

Gauges: The following gauges are included with the system: liquid level, temperature and pressure/vacuum gauges. Standard liquid level, temperature and pressure/vacuum gauges are analog, manual reading types. These gauges do not have auxiliary contacts.

Fault Pressure Devices: This transformer features an automatic action fault pressure device. Fault pressure devices are used to detect high rates of pressure rise within the tank.

Rapid Rise Relay: There are no rapid rise relays on the unit. This safety

component is designed for protection when a rapid increase in tank pressure occurs. The relay is suitable for detecting sudden pressure fluctuations above predetermined safe limits.

Surge arresters: This system comes with high elbow surge arresters on the primary side. Designed for over-voltage and transient voltage protection, the components prevent damage caused by lightning, internal switching or voltage surges. We can offer models without high elbow surge arresters that have mounting provisions for customer-provided surge arresters.

Load Break Switch: This transformer is equipped with a load break switch. This switch has four positions: A side on + transformer on, B side on + transformer on, A and B sides + transformer on, and A and B sides + transformer off.

Valves: The MT-PML-R7-1P-GMR-50KVA-SZ-LT-DF-A6-BB-CZ-2BP4-M1 is equipped with a fill valve and drain valve with sampler port.

Protection Fuses: This transformer contains bayonet protection fuses on the primary side. For units without protection fuses, up stream protection is provided. We recommend provisions for protection fuses when possible, as blown fuses may require more frequent oil changes.

Mount: The heavy-duty enclosure makes the unit suitable for both indoor and outdoor applications. This power distribution system can be pad mounted on concrete pads.

Benefits: The MT-PML-R7-1P-GMR-50KVA-SZ-LT-DF-A6-BB-CZ-2BP4-M1 pad mount transformer offers many benefits to consumers. This transformer provides owners with significant energy savings, as well as offering environmental benefits. Higher efficiency not only extends the life of the transformer, but also turns into cost savings for owners in the form of lower energy bills and decreased cost of ownership.

Applications: General purposes, industrial sites, electrical rooms, underground vaults, manufacturing facilities, steel plants, offshore, commercial, military, processing plants, electric power distribution, utilities, public locations and more. Larson Electronics is a manufacturer and as such can build stationary and portable transformer systems to your specifications. Although we carry several models of power distribution transformer systems, we can deliver custom ordered units almost as quickly as our prebuilt units. If this model does not meet your needs, please contact us at 1-800-369-6671 or sales@larsonelectronics.com to discuss your specific requirements.

Frequently Asked Questions (FAQ)

Q. What type of transformers does Larson Electronics offer?

A. Larson Electronics offered dry type transformers and liquid filled transformers. For liquid filled transformers, Larson Electronics' offers overhead distribution transformers (utility pole mount), pad mounted distribution transformers (mounts to a concrete pad), pad mounted power transformers, underground submersible distribution transformers, and substation transformers.

Q. What are the main benefits of a liquid filled transformer?

A. Liquid filled transformers have higher energy efficiency, durability, short circuit strength, low sound level, lower maintenance costs, and longer useful life expectancy compared to dry type transformers.

Q. What types of transformer liquids does Larson Electronics use?

A. Larson Electronics offered mineral oil fluid (ONAN) and biodegradable fluid (KNAN). On request we can provide brand name FR3 fluid or other brand name fluids for additional cost and lead time. All fluids offered by Larson Electronics are non-PCB containing fluids.

Q. What is the difference between mineral oil (ONAN) and biodegradable fluid (KNAN)?

A. Mineral oil has a flash point of 147-165°C. Biodegradable insulation fluids have a higher flash point up to 350°C. Using biodegradable fluids reduce the risk of potential fire due to the transformer overheating. Utilizing biodegradable fluids extends the lifespan on the transformer due to better insulation, higher flash point, better moisture resistance, and higher maximum voltage breakdown points over mineral oils.

Q. What is the difference between FR3 fluid and biodegradable fluid?

A. Envirotamp FR3 is a brand name of biodegradable ester oils made by Cargill. Cargill is not the only manufacturer of biodegradable ester fluids used for cooling liquid filled transformers. Larson Electronics stocks RAPO biodegradable fluid that exceeds testing for ASTM D6871. Cargill Envirotamp FR3 can be used in substitution of the standard biodegradable fluid. This substitution will increase cost and lead times.

Q. Do Larson Electronics transformers contain PCB?

A. All dry-type and liquid filled transformers manufactured by Larson Electronics are PCB (polychlorinated biphenyl) free at the time of shipment. Mixtures of polychlorinated biphenyls (PCB's) were banned commercially for use as transformers cooling fluids in 1977 due to being toxic, bio-accumulative, not at all biodegradable, and difficult to dispose of safely. None of Larson

Electronics transformers contain PCB and only use PCB-free fluids.

Q. What are the transformer ratings?

A. IEEE Std C57.12.20 (Overhead Type), IEEE Std C57.12.34 (Three-Phase Pad-Mounted Compartmental), IEEE Std C57.12.38 (Single-Phase Pad-Mounted), IEEE Std C57.12.36 (Distribution Substation Transformers). For more detailed list of standards, please see the ASTM Certificate 1 link.

Q. Is this transformer UL Listed? Is this transformer CSA Listed?

A. By default, no. The majority of medium voltage transformer installations do not require certification by a Nationally Recognized Testing Laboratory (NRTL) unless being installed inside a building. Medium voltage equipment is built to and complies to ANSI, ASTM, DOE, IEEE, and NETA standards. UL is one of multiple NRTLs per OSHA certification for testing facilities for USA standards. CSA is one of multiple NRTLs per Canada certification standards. For an additional fee, we can submit your order for NRTL testing after completion of build. This testing service is per order, requires payment of testing fees, and will increase lead time.

Q. What is the lifespan of a transformer?

A. The average lifespan of a liquid filled transformer is 25 years. Many transformers will survive past the 25 year mark and are still in service for up to 35 years.

Q. What is the difference between Loop Feed and Radial Feed?

A. Radial feed Transformers will have three high voltage bushings (H1, H2, and H3). There is one bushing for each phase to allow for the incoming high voltage cables. On Wye and Grounded Wye connected Transformers, there will also be an H0 bushing. Loop feed Transformers will have six high voltage bushings (H1A, H2A, H3A, H1B, H2B, and H3B). There are two bushings for each phase. This allows the customer to connect all of their Transformers in a loop configuration. It will also allow the customer to bring two feeds to the Transformer. A four position switch can be used to switch between the A feed and the B feed.

Q. What is the difference between Dead Front and Live Front?

A. Live-front: The voltage-carrying parts are exposed. Live-front terminations have high voltage connectors, arresters, or fuses are exposed to the operator after cabinet has been opened. Dead-front: Often referred to as dead-front bushings. Safety is enhanced as there are no current-carrying parts exposed to the operator. For overhead distribution transformers and underground submersible transformers, live front is common. For pad mount transformers, the primary is typically dead front and the secondary is live front. Protection barriers can be added to live front pad mounted transformers

Q. What is the difference between copper and aluminum windings inside the transformer?

A. Transformers wound with aluminum or copper wire have similar losses and performance. The choice of using copper or aluminum windings depends upon the application and the individual preferences. The type of winding material does not affect the transformer's reliability. A transformer's life is defined by the life of its insulation system.

Q. How many BTU's of heat does a transformer generate?

A. The heat a transformer generates is dependent upon the transformer losses. To determine air conditioning requirements multiply the sum of the full load losses (obtained from factory or test report) of all transformers in the room by 3.41 to obtain the BTUs/hour. For example: A transformer with losses of 2000 watts will generate 6820 BTUs/hour.

Q. Do you have to ground this transformer?

A. In most cases the enclosure of the transformer is grounded for safety reasons. However, a transformer will function properly without being grounded. Be sure to research all grounding requirements for your specific application against the NETA and NEC as well as any local electrical codes.

Q. I plan to utilize this transformer for a solar or green energy related project to back feed the grid, can this unit be reverse fed for providing electric back to the utility grid?

A. We offer a line of transformers for step up / step down operation that is designed for solar and renewable energy applications. Larson Electronics utilizes a R designation of R3 and R4 for these applications. Our standard R2 and R7 models are not designed for step up operation for reverse feeding and should not be utilized for these applications.

Q. What types of transformer protection are available?

A. For over-current protection, Larson Electronics offers Fuses, breakers and interrupters. For over-voltage protection, Larson Electronics offers arresters. Larson Electronics can provide both Primary and Secondary protection equipment.

Q. What primary connectors are included with this transformer?

A. We offer elbow connectors standard for dead front primary transformers. 200-amp load break well bushings with inserts and elbows are standard up to 500 KVA. 600-amp dead break integral bushings and elbows are standard for 500 KVA through 3750 KVA. 900 amp dead break integral bushings and elbows are standard for units above 3750 KVA. We can change the standard bushing to a higher or lower amperage upon request providing the primary amperage does not exceed the amperage rating of the bushing.

Q. Are primary elbows included with purchase?

A. Primary mating elbows that match the bushings the transformer is configured with are included with purchase for standard units.

Q. What type of surge arrestors are included?

A. Elbow surge arrestors are included with standard builds if specified that surge arrestors are included (check specifications). Wall mounted surge arrestors can be configured upon request.

Q. What secondary connectors are included?

A. NEMA spade connectors are included standard for live front secondary connections, and elbow connectors are included standard for dead front secondary connections. The specific hole quantity and hole spacing are referenced on preliminary drawings and in the specifications.

Q. What accessories are included?

A. Temperature gauge, oil level gauge, pressure/vacuum gauge, tap changer, load break switch, surge arrestors, fill plug, and drain plug are included standard. Gauges can be offered with auxiliary dry form contacts on request. Please review specifications for all accessories included with this specific unit.

Q. What is required for mounting this transformer?

A. For mounting requirements, please see the Concrete Pad document hyperlinked on the spec sheet and seen on the product page.

Q. Does my primary and secondary voltage matter for a transformer?

A. Yes, this matters greatly. For primary voltage, most transformers will be equipped with a tap changer for small primary voltage changes due to voltage drop for losses experienced in the transmission line. Some transformers will be equipped with dual voltage primaries with a voltage selector switch to choose which voltage to operate the transformer on. In both cases, these are designed to provide a steady output voltage. It is very important to confirm what voltage your primary voltage being delivered from the utility provider and what the required electrical voltage for the building or house is. You cannot only provide the KVA size, or the abbreviated primary voltage as there is not standardized voltage across the country and each region can be different. Once manufacturing has started, these cannot be changed.

Q. Where is the detailed dimensional drawing for this unit?

A. We can provide a feature drawing that shows accessories and estimated form factor. Due to the variety of options and varying voltages, an exact dimensional drawing for the specific unit you have ordered is not available until after purchase and engineering has completed the drawing for your sales order. We do not offer completed detailed engineered drawings before purchase. The feature drawings are detailed enough for concrete pad designs and preliminary engineering site designs.

Q. What is the warranty of this transformer?

A. 12 months from point of connecting electrical service to the transformer or 18 months from point of ordering, whichever comes first.

Q. Can this transformer be customized?

A. Yes, Larson Electronics allows for customization of all transformers. Please send customization requests to sales@larsonelectronics.com. If you have an engineered specification or engineered drawings, please provide those at the time of request.

Q. What materials do you offer?

A. We offer coated steel and stainless steel tank and housing materials. Stainless steel options include 429 stainless and 304 stainless. For winding materials we offer aluminum and copper conductors.

Q. What standard colors do you offer?

A. Our standard build finish color for pad mounted transformers is Munsell™ 7GY 3.29/1.5 Pad-Mount Green. We do have other standard finishes available on request, including: Munsell™ 9GY 1.5/2.6 Canadian Green, Munsell™ 5BG 7.0/0.4 Light Grey (ANSI #70), Grey (ANSI #61), Munsell™ 10bg 6/1 Blue Grey, Munsell™ 10bg 6/1 Steel Blue, Munsell™ N 9/ Safety White, Federal Standard Desert Tan FS595B-33446, Federal Standard Eagle Feather Tan FS-595-23578, and Federal Standard Tobacco Brown FS595C-30108. If you need a color not listed here, please contact us.


Q. What labeling is on the transformer?

A. Standard labeling includes external stenciling of the KVA, stenciling of high and low voltages, non-PCB sticker, "Mr. Ouchy" warning label, and stainless steel riveted nameplate. Additional labeling to your specifications can be provided at request.

Q. Does this transformer comply with (insert utility provider) specifications?

A. Larson Electronics utilizes a dedicated R designation in the part number for specific build designs. R1-R10 are internal build designs. Utility specific builds begin at R11. If the part number contains R2, R5, R6, R7, R8, or R9 the unit may comply with a specific local utility for primary and secondary voltages but may not comply for equipment connections, included accessories, labeling, or barcoding. Units that comply with a specific utility will have reference to the utility company that the unit complies with, and include the utility's internal part number and utility's specification standard if applicable. If you are unable to find the part number that meets your local utility specifications, please contact us and we will assist in crossing the correct unit for you.



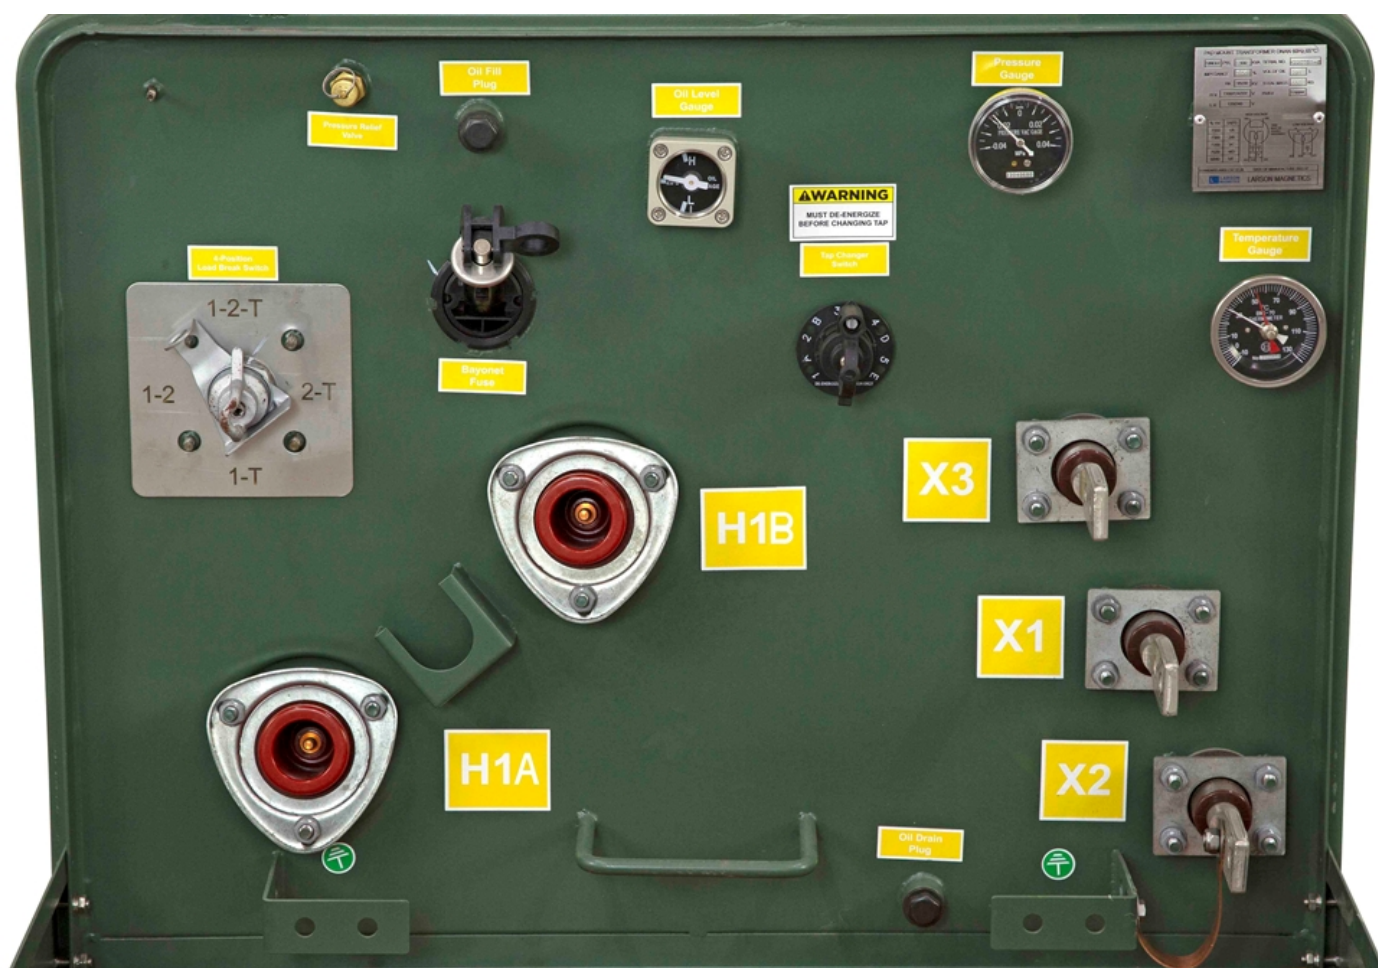





Harmonized System (HS) Code: 85043300
Export Control Classification Number (ECCN): EAR99

Links (Click on the below items to view):

- [ANSI Certificate 1](#)
- [ASTM Certificate 1](#)
- [Catalog Page - Product Series](#)
- [Concrete Pad Dimensional Drawing](#)
- [FCC Certificate \(Federal Communications Commission, USA\)](#)
- [Internal Component Spec Sheet 3](#)
- [MSDS \(Material Safety Data Sheet](#)
- [Operations Manual](#)
- [HigResPic1](#)
- [HigResPic2](#)
- [HigResPic3](#)
- [HigResPic4](#)
- [HigResPic5](#)
- [Video1](#)
- [Video2](#)
- [Video3](#)
- [Video4](#)
- [ISO 9001 Certification](#)
- [Business Certificate](#)
- [Shipping Time Map](#)