

Product ID: 148279

Please see last page for supporting documentation for this product (certificates, CAD files & drawings, IES files, wiring diagrams, etc).



Image:

Larson Electronics LLC manufactures a wide variety of products, including custom built to spec designs. The pictures displayed for this unit are a general representation of form factor for the product line and may not accurately represent this exact configuration in every detail due to custom builds and changes between similar products in our standard catalog. The specifics for this configuration are listed in the specification table and supporting documentation (CAD files, Dimensional Drawing, Name Plate Diagram, Wiring Diagram, etc.). This means that specific details (receptacles, plugs, wires, connections, mounting brackets, external finishes, etc.) may not be accurately represented in images vs specifications. Please review specifications and do not order based solely on images.

EPF-DDB-PM-18-0.25HP Explosion Proof Fan

Type: Direct Drive Fan

Propeller Dimensions: 18" Diameter

Propeller Material: Non-Sparking Cast Aluminum

Weight: 80 lbs

Voltage: 115 or 230V AC

Motor: 1/4 HP Fully Enclosed Explosion Proof

Rotations Per Minutes (RPM): 1,725

Peak CFM: 3,450

Decibels @ 10': 74

Mounting: Pedestal Base Stand

Wiring: Customer Provided

Cord Cap: Customer Provided

Ratings/Features

Class I, Division 1 & 2, Group D

Class II, Division 1 & 2, Groups F & G

Non-Sparking Propeller

Up To 3,450 CFM Air Movement

Rated for Hazardous Environments

Made in the USA

Special Orders- Requirements

Contact us for special requirements

Toll Free: 1-800-369-6671

Intl: 1-903-270-1187

Fax: 1-903-765-7664

E-mail: sales@larsonelectronics.com

Made in the USA

The EPF-DDB-PM-18-0.25HP from Larson Electronics is a high pressure, high volume explosion proof ventilation fan that operates on 115 or 230V AC. This high volume explosion proof direct drive fan features an 18" diameter non-sparking cast aluminum blade that moves air at a rate of up to 3,450 cubic feet per minute (CFM) for superior ventilation and air movement. The unit is powered by a fully enclosed and explosion proof 1/4 horsepower motor and is mounted on top of a pedestal base stand.

The EPF-DDB-PM-18-0.25HP explosion proof direct drive fan is rated for Class I, Group D and Class II, Groups F & G hazardous environments. The 18" diameter propeller on this explosion proof direct drive fan is constructed from cast aluminum to resist sparking further increasing the safety of the hazardous environment in which the fan is being utilized. This single phase explosion proof direct drive fan has a 1/4 horsepower fully enclosed motor that can spin the propeller at a rate of 1,725 RPM.

Voltage: The EPF-DDB-PM-18-0.25HP explosion proof ventilation fan operates on 115/230V AC.

Applications: Class I, Group D and Class II, Groups F & G hazardous areas that require ventilation, including but not limited to the following: clean rooms, marijuana extraction rooms, laboratory hoods, oil refineries, grain mills, chemical plants, welding shops, chemical storage areas and battery changing areas.

At Larson Electronics, we do more than meet your lighting needs. We also provide replacement, retrofit, and upgrade parts as well as industrial grade power accessories. Our craftsmen can custom build any lighting system and/or accessories to fit the unique demands of your operation. A commitment to honesty, quality, and dependability has made Larson Electronics a leader in the lighting and electronics business since 1973. Contact us today at 800-369-6671 or message sales@larsonelectronics.com for more information about our custom options tailored to meet your specific industry needs.

Made in USA Quality

1. Fully enclosed explosion proof 1/4 HP motor.
2. Non-sparking cast aluminum 18" diameter propeller.
3. Class I, Group D and Class II, Groups F & G rated.
4. Multi-voltage capable.
5. Moves up to 3,450 cubic feet of air per minute.
6. Fully assembled and ready to install.



Frequently Asked Questions (FAQ)

There are no Faqs

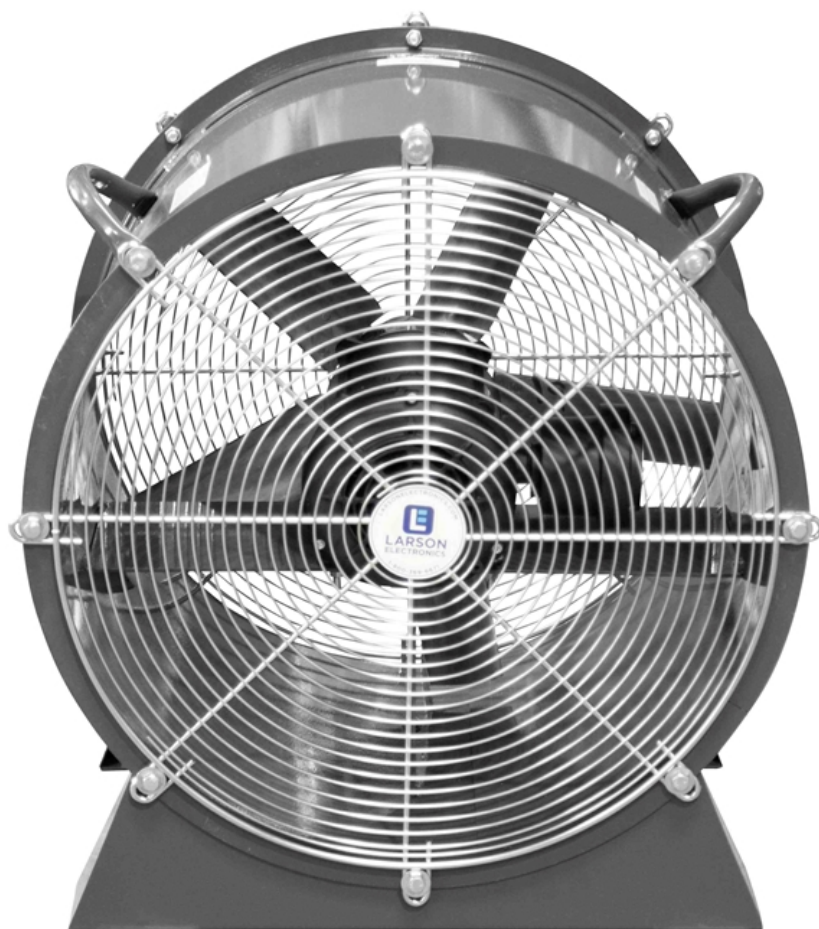


Image:



Image:



Image:



Image:



Product ID: 148279

Export Control Classification Number (ECCN): EAR99



Links (Click on the below items to view):

- **Operations Manual** (<https://www.larsonelectronics.com/images/product/Manual/148279.PDF>)
- **SpecSheetSpanish** (<https://www.larsonelectronics.com/images/product/SpecSheetSpanish/148279.PDF>)
- **HigResPic1** (<https://www.larsonelectronics.com/images/product/HigResPic1/148279.JPG>)
- **HigResPic2** (<https://www.larsonelectronics.com/images/product/HigResPic2/148279.JPG>)
- **HigResPic3** (<https://www.larsonelectronics.com/images/product/HigResPic3/148279.JPG>)
- **HigResPic4** (<https://www.larsonelectronics.com/images/product/HigResPic4/148279.JPG>)
- **HigResPic5** (<https://www.larsonelectronics.com/images/product/HigResPic5/148279.JPG>)
- **HigResPic6** (<https://www.larsonelectronics.com/images/product/HigResPic6/148279.JPG>)
- **ISO 9001 Certification** (<http://larsonelectronics.com/images/pdfdocs/ISO9001.PDF>)
- **Business Certificate** (<https://www.larsonelectronics.com/images/pdfdocs/w9.PDF>)
- **Shipping Time Map** (<https://www.larsonelectronics.com/images/product/ShippingTimeMap/ShippingTimeMap.pdf>)