

EXPCMR-WIP-RPS-OZ-2MP-BC

Explosion Proof Outdoor Security Camera - Rechargeable - Wireless Video Output - Adj Rail Mount

Product ID: 149116

Please see last page for supporting documentation for this product(certificates, CAD files & drawings, IES files, wiring diagrams, etc).



Larson Electronics LLC manufactures a wide variety of products, including custom built to spec designs. The pictures displayed for this unit are a general representation of form factor for the product line and may not accurately represent this exact configuration in every detail due to custom builds and changes between similar products in our standard catalog. The specifics for this configuration are listed in the specification table and supporting documentation (CAD files, Dimensional Drawing, Name Plate Diagram, Wiring Diagram, etc.). This means that specific details (receptacles, plugs, wires, connections, mounting brackets, external finishes, etc.) may not be accurately represented in images vs specifications. Please review specifications and do not order based solely on images.

EXPCMR-WIP-RPS-OZ-2MP-BC Explosion Proof Camera w/ Wireless Video Output

Unit Type: Explosion Proof Rechargeable Camera

Dimensions: 18"W x 8"D x 6"H

Weight: -

Voltage: 12V DC

Watts: 5W

Image Sensor: CMOS

Display Resolution: 1920 x 1080

Video Resolutions: 1080p (1920 x 1080), 720p (1280 x 720), VGA (640 x 480), QVGA (320 x 240)

Lens: 2.8-4mm Focal Length

Angle of View: Horizontal: 106°, Diagonal: 118° @ f = 2.8mm; Horizontal: 70°, Diagonal: 78° @ f = 4mm

Video Framerate: 30fps (60Hz), 25fps (50Hz), Downward Adjustable

Video Output: Wireless

Wireless Standard: IEEE802.11b / g / n

Data Rate: IEEE802.11b - 11Mbps (Max); IEEE802.11g - 54Mbps (Max); IEEE802.11n - 150Mbps (Max)

Frequency Bands: 2412 - 2472 MHz

Remote Access: Supports P2P & DDNS

Wireless Security: Supports WEP, WPA & WPA2

Maximum Power: 18dBm

Housing Material: Aluminum

Mounting: Adjustable Rail Mount

Rail Size Options: 1.5", 2", 3" or 4"

Battery: 8.8aH Lithium-ion, Rechargeable

Ratings/Approvals

Class I, Div 1 & 2 Groups B,C,D

Class I, Zones 1 & 2 Groups IIB+H2, IIA

Class II, Div 1 & 2 Groups E,F,G

Class III, Div 1 & 2

IECEX db IIC Gb

IECEX tb IIC Db IP66

ATEX Ex II 2 G / D

NEMA 3, 4, 4X, 7 (B, C, D), 9 (E, F, G)

30' Max Distance

Special Orders - Special Requirements

Contact us for special requirements

Toll Free: 1-800-369-6671

Intl: 1-903-270-1187

Runtime: 8 Hours per Charge

Fax: 1-903-498-3364

Charger: 120-240V Non-explosion Proof Charger

E-mail: sales@larsonelectronics.com

The EXPCMR-WIP-RPS-OZ-2MP-BC from Larson Electronics is an Explosion Proof Outdoor Security Camera for flammable work sites, harsh environments and outdoor locations. This IP66-rated device is rechargeable and offers wireless video output and connection to other devices. Capable of producing clear, 1080p HD images, the unit features an adjustable rail mounting system for versatile applications around the work site.

Camera Features: The EXPCMR-WIP-RPS-OZ-2MP-BC security camera provides operators in hazardous areas with crisp 1080p HD images. Equipped with a 2 MP lens, up to 6x digital zoom is possible with the fixed-focus device. A cutting-edge chipset facilitates image compression and video processing with superior quality. Operating at 5 watts, the explosion proof monitoring device is rechargeable, with up to 8 hours of runtime per full charge. Video output and connection to other devices is wireless (no cords).

Durability: The EXPCMR-WIP-RPS-OZ-2MP-BC is rated NEMA Type 3, 4, 4X, 7 (B,C,D) and 9 (E,F,G) and designed to withstand the rigors of demanding environmental and operating conditions while remaining lightweight and easy to use. The housings are formed from extruded aluminum and the lenses are unbreakable polycarbonate.

The explosion proof security device is designed to perform under harsh and rugged conditions. This IP66 rated waterproof unit resists the corrosive effects of weather, dust, dirt, and humidity. This Class I Divisions 1 & 2, Class II Divisions 1 & 2, Class III Divisions 1 & 2 rated camera provides property and product security while protecting operators with its safe and reliable explosion proof and weatherproof design.

Security & Remote Access: The EXPCMR-WIP-RPS-OZ-2MP-BC supports several forms of security. The supported forms include WEP Encryption, WPA Encryption and WPA2 Encryption. This explosion proof outdoor security camera also features remote access capability. It supports both P2P and DDNS remote access.

Wi-Fi: The EXPCMR-WIP-RPS-OZ-2MP-BC is Wi-Fi compliant with wireless standards IEEE 802.11 b/g/n. On IEEE802.11b, this camera transfers data at a maximum rate of 15Mbps. On IEEE802.11g, the max data transfer rate is 54Mbps. The max data transfer rate on IEEE802.11n is 150Mbps.

Wireless Network: The explosion proof camera allows operators to create their own 2.4Ghz and 5Ghz wireless network. This feature makes networks for cameras easier to setup in outdoor sites. A QR code on the unit can be scanned for seamless wireless network configuration. The network facilitates the connection of various devices. During use, footage is stored via internal memory.

Battery/Charging: This unit is powered by a rechargeable 8.8aH lithium ion battery. At a full charge, the explosion proof device provides a runtime of 8 hours. For charging in non-hazardous locations, operators can use an included, standard 120-240V outlet charger.

Mounting: The EXPCMR-WIP-RPS-OZ-2MP-BC can be mounted on rails, such as forklift railings, using an adjustable rail mount system. This component is easily detachable for charging, transportation or storage. The adjustable rail mount is offered in the following sizes for compatibility: 1.5", 2", 3" or 4".

Applications: Explosion proof forklifts, tank cleaning, tank/reactor monitoring, remote observation of external facilities, offshore and land based rigs, indoor and outdoor security, commercial buildings and more.


At Larson Electronics, we do more than meet your lighting needs. We also provide replacement, retrofit, and upgrade parts as well as industrial grade power accessories. Our craftsmen can custom build any lighting system and/or accessories to fit the unique demands of your operation. A commitment to honesty, quality, and dependability has made Larson Electronics a leader in the lighting and electronics business since 1973. Contact us today at 800-369-6671 or message sales@larsonelectronics.com for more information about our custom


options tailored to meet your specific industry needs.



Frequently Asked Questions (FAQ)



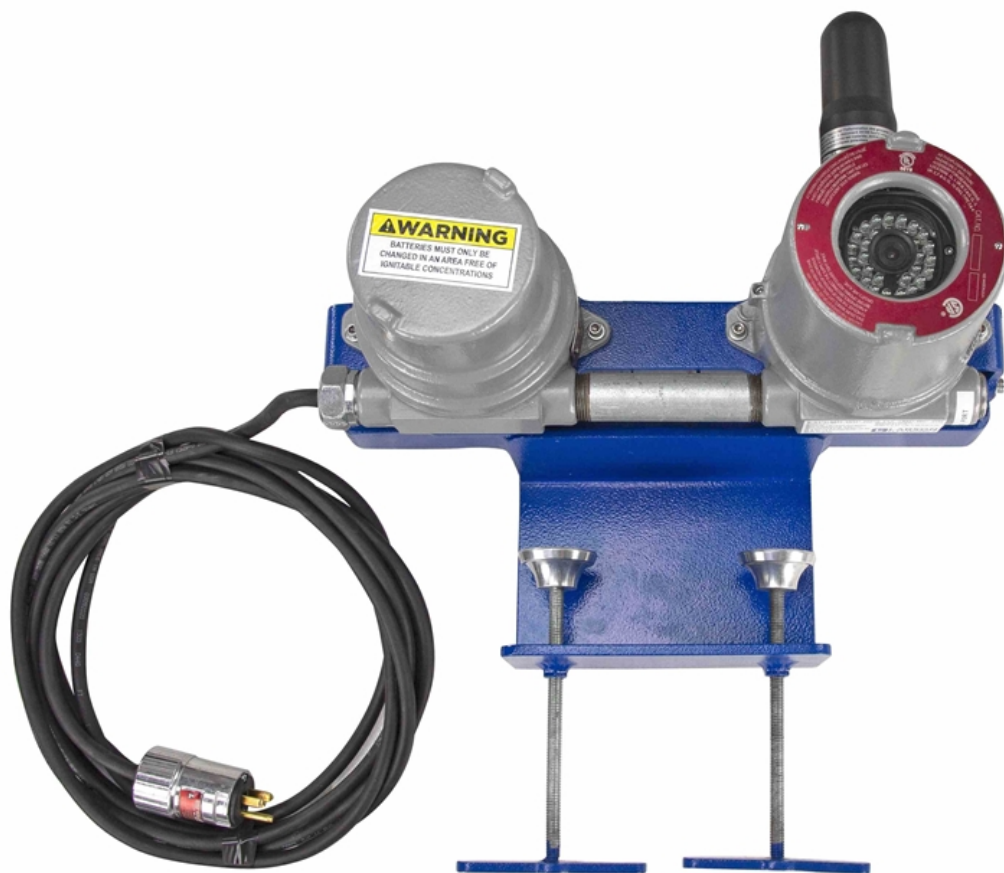

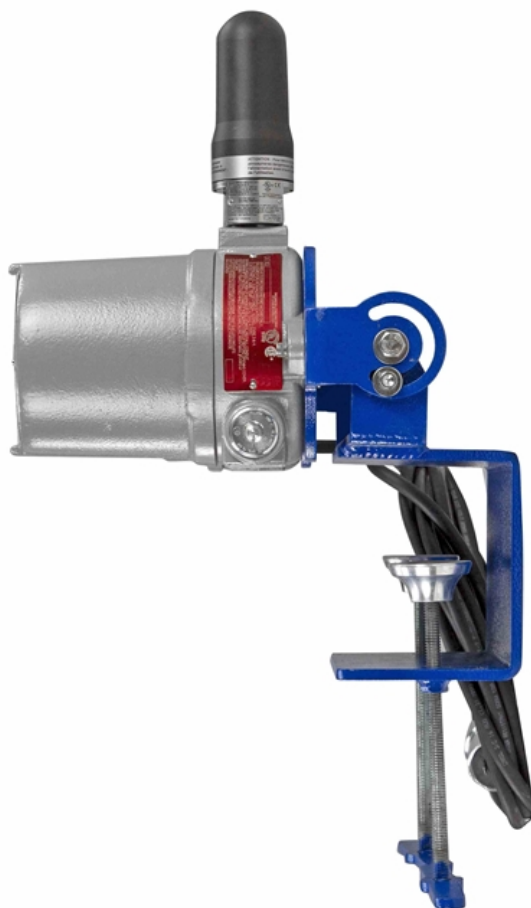



EXPCMR-WIP-RPS-OZ-2MP-BC

Product ID: 149116

Export Control Classification Number (ECCN): EAR99

Options:

EXPCMR-WIP-RPS-OZ-2MP-BC-Rail Size

Example: EXPCMR-WIP-RPS-OZ-2MP-BC-1.5IN

Rail Size	
1.5IN	-1.5IN
2IN	-2IN
3IN	-3IN
4IN	-4IN

Links (Click on the below items to view):

- [ATEX Certificate \(European Explosion Proof\)](#)
- [Canadian CEC Certificate \(Commonly referred to as CSA Certificate\)](#)
- [CE Certificate](#)
- [Certificate 1, Misc](#)
- [Certificate 2, Misc](#)
- [Certificate 3, Misc](#)
- [Certificate 4, Misc](#)
- [Dimensional Drawing 2D](#)
- [IEC Ex Certificate \(International Explosion Proof\)](#)
- [MSDS \(Material Safety Data Sheet\)](#)
- [Operations Manual](#)
- [RoHS Certificate \(Restriction of Hazardous Substances\)](#)
- [SpecSheetSpanish](#)
- [STEP File \(3D CAD Model\)](#)
- [USA NEC Certificate \(Commonly referred to as UL Certificate\)](#)
- [Wiring Diagram \(Online\)](#)
- [HigResPic1](#)
- [HigResPic2](#)
- [HigResPic3](#)
- [HigResPic4](#)
- [HigResPic5](#)
- [HigResPic6](#)
- [HigResPic7](#)
- [HigResPic8](#)
- [HigResPic9](#)
- [HigResPic10](#)
- [Video1](#)
- [Video2](#)
- [Video3](#)
- [ISO 9001 Certification](#)
- [Business Certificate](#)
- [Shipping Time Map](#)