Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.498.3364

MT-PML-R7-1P-DMR.NF-10KVA-SLZ-LT-DF-A6-BB-CS-2C4-M1

10 KVA Pad Mount Transformer - 12470 x 4160V Delta Primary, 120/240V Secondary - Copper/KNAN - 304 Stainless Steel

Product ID: 314097

Please see last page for supporting documentation for this product(certificates, CAD files & drawings, IES files, wiring diagrams, etc).



Larson Electronics LLC manufactures a wide variety of products, including custom built to spec designs. The pictures displayed for this unit are a general representation of form factor for the product line and may not accurately represent this exact configuration in every detail due to custom builds and changes between similar products in our standard catalog. The specifics for this configuration are listed in the specification table and supporting documentation (CAD files, Dimensional Drawing, Name Plate Diagram, Wiring Diagram, etc.). This means that specific details (receptacles, plugs, wires, connections, mounting brackets, external finishes, etc.) may not be accurately represented in images vs specifications. Please review specifications and do not order based solely on images.

MT-PML-R7-1P-DMR.NF-10KVA-SLZ-LT-DF-A6-BB-CS-2C4-M1 1PH Pad Mount Transformer

Transformer Type: Pad Mounted, Compartmental-Type
Transformer Configuration: Liquid Filled Pad Mounted
Transformer Feed Type: Loop Feed
Phase: Single Phase
Capacity: 10 KVA
Vector Group: II6
Primary Voltage: 12470 x 4160V
Primary Voltage Switch: Included
Primary Voltage Class: 15 kV Class
Primary Phasor: Delta
Primary BIL: 95 KV
Secondary Voltage: 120/240V (L-N-L)
Secondary Phasor: Dual Windings, Single Phase
Secondary BIL: 30 KV
Frequency: 60 Hz

Temperature Rise: 65°C

Cooling Class: KNAN; Self-Cooled
Forced Air (Fans): None
Tap Changer: 5-Position Tap Changer w/ External Operating Handle
Tap Qty: (2) FCAN Above Nominal Taps, (2) FCBN Below Nominal Taps
Tap %: 2.5%

Tap Changer Switch Location: Front Compartment

Ratings

Meets/Exceeds DOE 2016 Efficiency Ratings
Complies with ANSI / IEEE #C57.12.00
Complies with ANSI / IEEE #C57.12.25
Complies with ANSI / IEEE C57 12.28
Complies with ANSI / IEEE C57 12.38
Complies with ANSI / IEEE C57.12.70
Complies with ASTM D3487
Lift Up Pad lockable Lid
Penta-head Entry Assembly
High-Fire Point Natural Ester Insulating Fluid
Non-PCB Insulating Fluid
Tamper Proof Housing

Efficiency: 98.70%
Based on transformer operating at 50% of nameplate base kVA.

Load Losses Based on 85°C Reference Temp.
No Load Loss (in watts)*: +/- 47W
Load Loss (in watts)*: +/- 156W
Total Load Loss (in watts)*: +/- 203W
Note: Losses offered are typical only, not guaranteed

Impedance: 1.0-4.5% Typical
Primary Connection Type: Dead Front
Primary Termination: Well Bushings, 200A
Primary Connection Qty: (4)
Primary Parking Stand Qty: (4) Welded Brackets for Installing Accessory Parking Stand Bushings
Primary Surge Arrestors: Included, High Voltage Elbow Surge Arrestors
Primary Surge Arrestor Voltage Rating: 18 kV Class
Primary Surge Arrestor Voltage MCOV Rating: 15.3 kV
Primary Over Current Protection (OCP): Bayonet Fuses w/ Partial-Range Current-Limiting Fuses
Primary Over Current Protection Method: Fused
Primary Over Current Protection Holder: Bayonet Fuse Holder w/ Drip Shield
Primary Grounding Provisions: (1) Grounding lug, accepts #2 copper
Secondary Connection Type: Live Font
Secondary Connections: Threaded Stud Terminals
Secondary Over Current Protection (OCP): N/A
Secondary Connection Qty: (3)
Secondary Grounding Provisions: (1) Grounding lug, accepts #2 copper
Metering Current Transformer (CT): N/A
Metering Panel: N/A
Auxiliary Control Panel : N/A
Load Break Switch: 4-Position Load Break Switches (12 kA Make And Latch Rating)
Load Break Switch Qty: (1)
Load Break Switch Location: High Voltage (HV) Front Compartment
Efficiency Standard(s): Meets DOE 2016 Standard 10 CFR 431, Subpart K, Meets ANSI/IEEE Standards
K-Factor Rating (Harmonic Mitigation): K-1 (Standard)
Pulse Drive Rating: N/A
Insulation Fluid: Biodegradable Natural Vegetable Oil Ester Insulating Fluid, Non-PCB Fluid
Fluid Capacity*: 35.44 Gallons
Liquid Level Indicator: Analog Dial Gauge
Temperature Indicator: Analog Dial Gauge
Pressure/Vacuum Indicator: Analog Dial Gauge
Pressure Relief Device: Included, Automatic Action
Fill Valve: Removable Bolt
Fill Valve Location: Front Compartment
Drain Valve: Included, w/ Sampler
Drain Valve Location: Front Compartment
Winding Material: Copper
Ambient Temperature Rating: 40°C
Sound Level: 48 dBA
Elevation (Altitude): 3300ft (1000 meters) Above Sea Level
Core Material: Grain Oriented Steel
Tank Material: 304 Stainless Steel
Cabinet Material: 304 Stainless Steel
Base Platform Material: 304 Stainless Steel
Housing Type: Tamper Resistant w/ Pad-lockable Lift-up Lid
Paint Type: Weatherproof and UV Resistant Epoxy Coating and Undercoating
Finish Color: Munsell™ 5BG 7.0/0.4 Sky Grey (ANSI #70)
Mounting: Pad Mount
Conduit Opening: Bottom Feed Underground Entry/Exit
Dimensions*: 33.86"-W x 37.4"-D x 25.2"-H
Weight*: 648.15 lbs
*Please note that numbers are approximate and subject to change

Routine Tests:

Polarity Test
Ratio Test
No-load losses (NLL) and excitation current Test
Load losses (LL) and impedance voltage Test
Impulse Voltage Dielectric Test
Induced Voltage Dielectric Test
Applied Voltage Dielectric Test
Leak Test

Special Orders - Special Requirements

Contact us for special requirements
Toll Free: 1-800-369-6671
Intl: 1-903-270-1187
Fax: 1-903-498-3364
E-mail: sales@larsonelectronics.com

The MT-PML-R7-1P-DMR.NF-10KVA-SLZ-LT-DF-A6-BB-CS-2C4-M1 Industrial Pad Mount Transformer from Larson Electronics offers powerful, reliable and efficient power distribution in indoor, outdoor and public locations. The low operating costs, low heat emissions and low cost of ownership makes this transformer ideal for a wide range of applications and businesses. An enclosed design caters to installations on concrete pads without protective fencing.

PLEASE NOTE: ANY FREE SHIPPING OFFERS DO NOT APPLY TO POWER DISTRIBUTION PANELS, TRANSFORMERS, OR SUBSTATIONS*

Transformer Features: With a transformer rating of 10 kVA, the industrial transformer features a primary voltage of single-phase 12470 x 4160V Delta and a secondary voltage of single-phase 120/240V (L-N-L). The unit has a primary loop

feed and dead-front primary connections. We also offer systems with radial feed and dead front primary/live front secondary connections. This transformer features a 5-position tap changer with (2) +/- 2.5% taps above and (2) +/- 2.5% taps below to allow small changes for voltage. This pad mount transformer features primary well bushings and standard spade connectors on the secondary side. Equipped with copper windings, this transformer consists of one coil and two core loops.

The MT-PML-R7-1P-DMR.NF-10KVA-SLZ-LT-DF-A6-BB-CS-2C4-M1 is air cooled and does not have fans or mounting provision for fans. This unit features a 65°C temperature rise for reduced heat waste, increased reliability and longer life. The transformer meets DOE 2016 efficiency standards. The combination of low temperature rise and high efficiency makes this unit suitable for use in electrical rooms, air conditioned spaces in buildings, underground vaults and similar locations, in addition to outdoor areas.

Insulation Fluid: The MT-PML-R7-1P-DMR.NF-10KVA-SLZ-LT-DF-A6-BB-CS-2C4-M1 features biodegradable cooling fluid (KNAN) that is comparable to FR3 fluid. We offer transformers with mineral oil fluid, if needed.

Gauges: The following gauges are included with the system: liquid level, temperature and pressure/vacuum gauges. Standard liquid level, temperature and pressure/vacuum gauges are analog, manual reading types. These gauges do not have auxiliary contacts.

Fault Pressure Devices: This transformer features an automatic action fault pressure device. Fault pressure devices are used to detect high rates of pressure rise within the tank.

Rapid Rise Relay: There are no rapid rise relays on the unit. This safety component is designed for protection when a rapid increase in tank pressure occurs. The relay is suitable for detecting sudden pressure fluctuations above predetermined safe limits.

Surge arresters: This system comes with high elbow surge arresters on the primary side. Designed for over-voltage and transient voltage protection, the components prevent damage caused by lightning, internal switching or voltage surges. We can offer models without high elbow surge arresters that have mounting provisions for customer-provided surge arresters.

Load Breaker Switch: The MT-PML-R7-1P-DMR.NF-10KVA-SLZ-LT-DF-A6-BB-CS-2C4-M1 is equipped with a load break switch. This switch has four positions: A side on + transformer on, B side on + transformer on, A and B sides + transformer on, and A and B sides + transformer off.

Valves: The MT-PML-R7-1P-DMR.NF-10KVA-SLZ-LT-DF-A6-BB-CS-2C4-M1 is equipped with a fill valve and drain valve with sampler port.

Protection Fuses: This transformer contains bayonet protection fuses on the primary side. For units without protection fuses, up stream protection is provided. We recommend provisions for protection fuses when possible, as blown fuses may require more frequent oil changes.

Mount: The heavy-duty enclosure makes the unit suitable for both indoor and outdoor applications. This power distribution system can be pad mounted on concrete pads.

Benefits: The MT-PML-R7-1P-DMR.NF-10KVA-SLZ-LT-DF-A6-BB-CS-2C4-M1 pad mount transformer offers many benefits to consumers. This transformer provides owners with significant energy savings, as well as offering environmental benefits. Higher efficiency not only extends the life of the transformer, but also turns into cost savings for owners in the form of lower energy bills and decreased cost of ownership.

Applications: General purposes, industrial sites, electrical rooms, underground vaults, manufacturing facilities, steel plants, offshore, commercial, military, processing plants, electric power distribution, utilities, public locations and more. Larson Electronics is a manufacturer and as such can build stationary and portable transformer systems to your specifications. Although we carry several models of power distribution transformer systems, we can deliver custom ordered units almost as quickly as our prebuilt units. If this model does not meet your needs, please contact us at 1-800-369-6671 or sales@larsonelectronics.com to discuss

your specific requirements.

Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.498.3364

Frequently Asked Questions (FAQ)


Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.498.3364



Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.498.3364

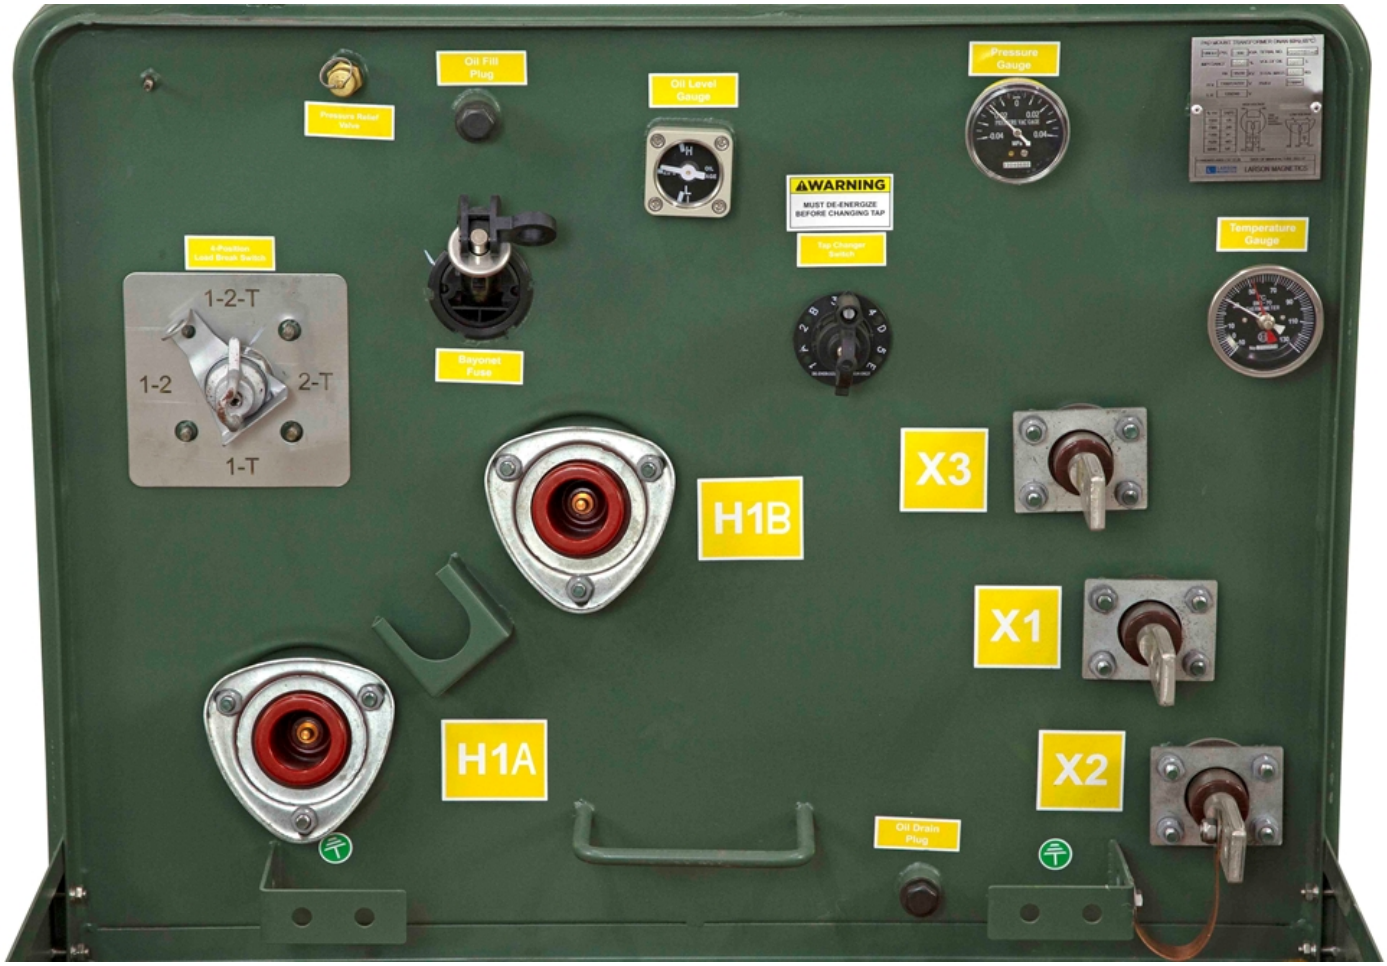





Export Control Classification Number (ECCN): EAR99

Links (Click on the below items to view):

- **Operations Manual**
- **HigResPic1**
- **HigResPic2**
- **HigResPic3**
- **HigResPic4**
- **HigResPic5**
- **Video1**
- **Video2**
- **Video3**
- **ISO 9001 Certification**
- **Business Certificate**
- **Shipping Time Map**