Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.498.3364

**MT-PML-R7-1P-GNC-25KVA-SLZ-LT-DF-A6-BM-AZ-1B.PZ-M1**

# 25 KVA Pad Mount Transformer - 7200Y/4160 Grounded Wye Primary, 120/240V Secondary - Mineral Oil Fluid / ONAN - Aluminum Windings - Bell Green

**Product ID: 314522**

**Please see last page for supporting documentation for this product(certificates, CAD files & drawings, IES files, wiring diagrams, etc).**



**Larson Electronics LLC manufactures a wide variety of products, including custom built to spec designs. The pictures displayed for this unit are a general representation of form factor for the product line and may not accurately represent this exact configuration in every detail due to custom builds and changes between similar products in our standard catalog. The specifics for this configuration are listed in the specification table and supporting documentation (CAD files, Dimensional Drawing, Name Plate Diagram, Wiring Diagram, etc.). This means that specific details (receptacles, plugs, wires, connections, mounting brackets, external finishes, etc.) may not be accurately represented in images vs specifications. Please review specifications and do not order based solely on images.**

| MT-PML-R7-1P-GNC-25KVA-SLZ-LT-DF-A6-BM-AZ-1B.PZ-M1 Pad Mount Transformer | Ratings |
|---|---|
| **Transformer Type: Pad Mounted, Compartmental-Type II** | Meets/Exceeds DOE 2016 Efficiency Ratings |
| **Transformer Configuration: Liquid Filled Pad Mounted** | Complies with ANSI / IEEE #C57.12.00 |
| **Transformer Feed Type: Loop Feed** | Complies with ANSI / IEEE #C57.12.25 |
| **Phase: Single Phase** | Complies with ANSI / IEEE C57 12.28 |
| **Capacity: 25 KVA** | Complies with ANSI / IEEE C57 12.38 |
| **Vector Group: II6** | Complies with ANSI / IEEE C57.12.70 |
| **Primary Voltage: 7200Y/4160** | Complies with ASTM D3487 |
| **Primary Voltage Switch: N/A** | Penta-head Entry Assembly |
| **Primary Voltage Class: 8.7 kV Class** | Lift Up Pad lockable Lid |
| **Primary Phasor: Grounded Wye** | Non-PCB Insulating Fluid |
| **Primary BIL: 75 KV** | Tamper Proof Housing |
| **Secondary Voltage: 120/240V (L-N-L)** | |
| **Secondary Voltage Class: 1.2 kV Class** | |
| **Secondary Phasor: Dual Windings, Single Phase** | **Efficiency: 98.70%** |
| **Secondary BIL: 30 KV** | *Based on transformer operating at 50% of nameplate base kVA.* |
| **Frequency: 60 Hz** | |
| **Temperature Rise: 65°C** | **Load Losses Based on 85°C Reference Temp.** |
| **Cooling Class: ONAN; Self-Cooled** | **No Load Loss (in watts)*: +/- 104W** |
| **Forced Air (Fans): None** | **Load Loss (in watts)*: +/- 377W** |
| **Tap Changer: 5-Position Tap Changer** | **Total Load Loss (in watts)*: +/- 481W** |
| **Tap Qty: (2) FCAN Above Taps, (2) FCBN Below Taps** | ***Note: Losses offered are typical only, not guaranteed*** |
| **Tap %: 2.50%** | |
| **Tap Changer Switch Location: Front Compartment** | |
| **Impedance: 1.0-4.5% Typical** | |

**Primary Connection Type: Dead Front**
**Primary Termination: Cover Mount (Eyebolts), 200A Load Break Elbows w/ Inserts**
**Primary Connection Qty: (2) Primary Connections w/ (1) Standoff Brackets for Parked Elbows**
**Primary Surge Arrestors: N/A**
**Primary Surge Arrestor Voltage Rating: N/A**
**Primary Surge Arrestor MCOV Rating: N/A**
**Primary Surge Arrestor Mounting Provision: Included Boss Nuts Mounting Provisions for Installing Lightning Arrestor on H1 & H2 Primary Terminals**
**Primary Over Current Protection (OCP): Bayonet Fuses**
**Primary Over Current Protection Method: Fused**
**Primary Over Current Protection Holder: Bayonet Fuse Holder w/ Drip Shield**
**Primary Grounding Provisions: (1) Grounding lug, accepts #2 copper**
**Secondary Connection Type: Live Font**
**Secondary Connections: Sidewall Mount (Eyebolts)**
**Secondary Over Current Protection (OCP): Included, MCCB, 3P, 600V, 400A, 25 kA**
**Secondary Connection Qty: (3)**
**Secondary Grounding Provisions: (1) Grounding lug, accepts #2 copper**
**Metering Current Transformer (CT): N/A**
**Metering Panel: N/A**
**Auxiliary Control Panel: N/A**
**Load Break Switch: N/A**
**Load Break Switch Qty: N/A**
**Load Break Switch Location: N/A**
**Efficiency Standard(s): Meets DOE 2016 Standards, Meets ANSI/IEEE Standards**
**K-Factor Rating (Harmonic Mitigation): K-1 (Standard)**
**Pulse Drive Rating: N/A**
**Insulation Fluid: Mineral Oil, Non-PCB Fluid**
**Fluid Capacity*: 40.33 Gallons**
**Liquid Level Indicator: Analog Gauge**
**Temperature Indicator: Analog Gauge**
**Pressure/Vacuum Indicator: Analog Gauge**
**Pressure Relief Device: Included, Automatic Action**
**Fill Valve: Removable Bolt**
**Fill Valve Location: Front Compartment**
**Drain Valve: Included, w/ Sampler**
**Drain Valve Location: Front Compartment**
**Winding Material: Aluminum**
**Ambient Temperature Rating: 40°C**
**Sound Level: 48 dBA**
**Elevation (Altitude): 3300ft (1000 meters) Above Sea Level or Below**
**Core Material: Grain Oriented Silicon Steel**
**Tank Material: Coated Steel**
**Cabinet Material: Coated Steel**
**Base Platform Material: Coated Steel**
**Housing Type: Tamper Resistant w/ Pad-lockable Lift-up Lid**
**Paint Type: Weatherproof and UV Resistant Epoxy Coating and Undercoating**
**Finish Color: Munsell™ 7.0 GY 3.29/1.5 Bell Green**
**Mounting: Pad Mount**
**Conduit Opening: Bottom Feed Underground Entry/Exit**
**Dimensions*: 33.86"-W x 37.4"-D x 25.2"-H**
**Weight*: 1049.38 Lbs**
*Please note that numbers are approximate and subject to change

**Special Orders - Special Requirements**
Contact us for special requirements
**Toll Free: 1-800-369-6671**
**Intl: 1-903-270-1187**
**Fax: 1-903-498-3364**
**E-mail: sales@larsonelectronics.com**

**The MT-PML-R7-1P-GNC-25KVA-SLZ-LT-DF-A6-BM-AZ-1B.PZ-M1 Industrial Pad Mount Transformer from Larson Electronics offers powerful, reliable and efficient power distribution in indoor, outdoor, and public locations. The low operating costs, low heat emissions and low cost of ownership makes this transformer ideal for a wide range of applications and businesses. An enclosed design caters to installations on concrete pads without protective fencing.**
***PLEASE NOTE: ANY FREE SHIPPING OFFERS DO NOT APPLY TO POWER DISTRIBUTION PANELS, TRANSFORMERS, OR SUBSTATIONS****
**Transformer Features:** With a transformer rating of 25 kVA, the industrial transformer features a primary voltage of single-phase 7200Y/4160 Grounded Wye and a secondary voltage of single-phase 120/240V (L-N-L). The unit has a primary loop feed and dead-front primary connections. We also offer systems with

radial feed and dead front primary/live front secondary connections. This transformer features a 5-position tap changer with (2) +/- 2.5% taps above and (2) +/- 2.5% taps below to allow small changes for voltage. This pad mount transformer features primary well bushings and standard spade connectors on the secondary side. Equipped with aluminum windings, this transformer consists of one coil and two core loops.
The MT-PML-R7-1P-GNC-25KVA-SLZ-LT-DF-A6-BM-AZ-1B.PZ-M1 is air cooled and does not have fans or mounting provision for fans. This unit features a 65°C temperature rise for reduced heat waste, increased reliability and longer life. The transformer meets DOE 2016 efficiency standards. The combination of low temperature rise and high efficiency makes this unit suitable for use in electrical rooms, air conditioned spaces in buildings, underground vaults and similar locations, in addition to outdoor areas.
**Insulation Fluid:** The MT-PML-R7-1P-GNC-25KVA-SLZ-LT-DF-A6-BM-AZ-1B.PZ-M1 features mineral oil insulation fluid. We offer transformers with FR-3 oil fluid, if needed.
**Gauges:** The following gauges are included with the system: liquid level, temperature and pressure/vacuum gauges. Standard liquid level, temperature and pressure/vacuum gauges are analog, manual reading types. These gauges do not have auxiliary contacts.
**Fault Pressure Devices:** This transformer features an automatic action fault pressure device. Fault pressure devices are used to detect high rates of pressure rise within the tank.
**Rapid Rise Relay:** There are no rapid rise relays on the unit. This safety component is designed for protection when a rapid increase in tank pressure occurs. The relay is suitable for detecting sudden pressure fluctuations above predetermined safe limits.
**Surge arresters:** This system doesn't come with surge protection. Mounting provisions for installing customer provided lightning arrestor on the H1 and H2 primary terminal are included for installing arresters in-field.
**Load Breaker Switch:** The MT-PML-R7-1P-GNC-25KVA-SLZ-LT-DF-A6-BM-AZ-1B.PZ-M1 isn't equipped with a load break switch.
**Valves:** The MT-PML-R7-1P-GNC-25KVA-SLZ-LT-DF-A6-BM-AZ-1B.PZ-M1 is equipped with a fill valve and drain valve with sampler port.
**Protection Fuses:** This transformer contains bayonet protection fuses on the primary side. For units without protection fuses, up stream protection is provided. We recommend provisions for protection fuses when possible, as blown fuses may require more frequent oil changes.
**Mount:** The heavy-duty enclosure makes the unit suitable for both indoor and outdoor applications. This power distribution system can be pad mounted on concrete pads.
**Benefits:** The MT-PML-R7-1P-GNC-25KVA-SLZ-LT-DF-A6-BM-AZ-1B.PZ-M1 pad mount transformer offers many benefits to consumers. This transformer provides owners with significant energy savings, as well as offering environmental benefits. Higher efficiency not only extends the life of the transformer, but also turns into cost savings for owners in the form of lower energy bills and decreased cost of ownership.
**Applications:** General purposes, industrial sites, electrical rooms, underground vaults, manufacturing facilities, steel plants, offshore, commercial, military, processing plants, electric power distribution, utilities, public locations and more. Larson Electronics is a manufacturer and as such can build stationary and portable transformer systems to your specifications. Although we carry several models of power distribution transformer systems, we can deliver custom ordered units almost as quickly as our prebuilt units. If this model does not meet your needs, please contact us at 1-800-369-6671 or sales@larsonelectronics.com to discuss your specific requirements.

Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671


www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.498.3364

# Frequently Asked Questions (FAQ)


NO PCBs
LARSONELECTRONICS.COM
877-875-2747
sales@larsonelectronics.com
WARNING
HAZARDOUS VOLTAGE INSIDE
KEEP OUT!
WARNING
NOTICE

Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.498.3364

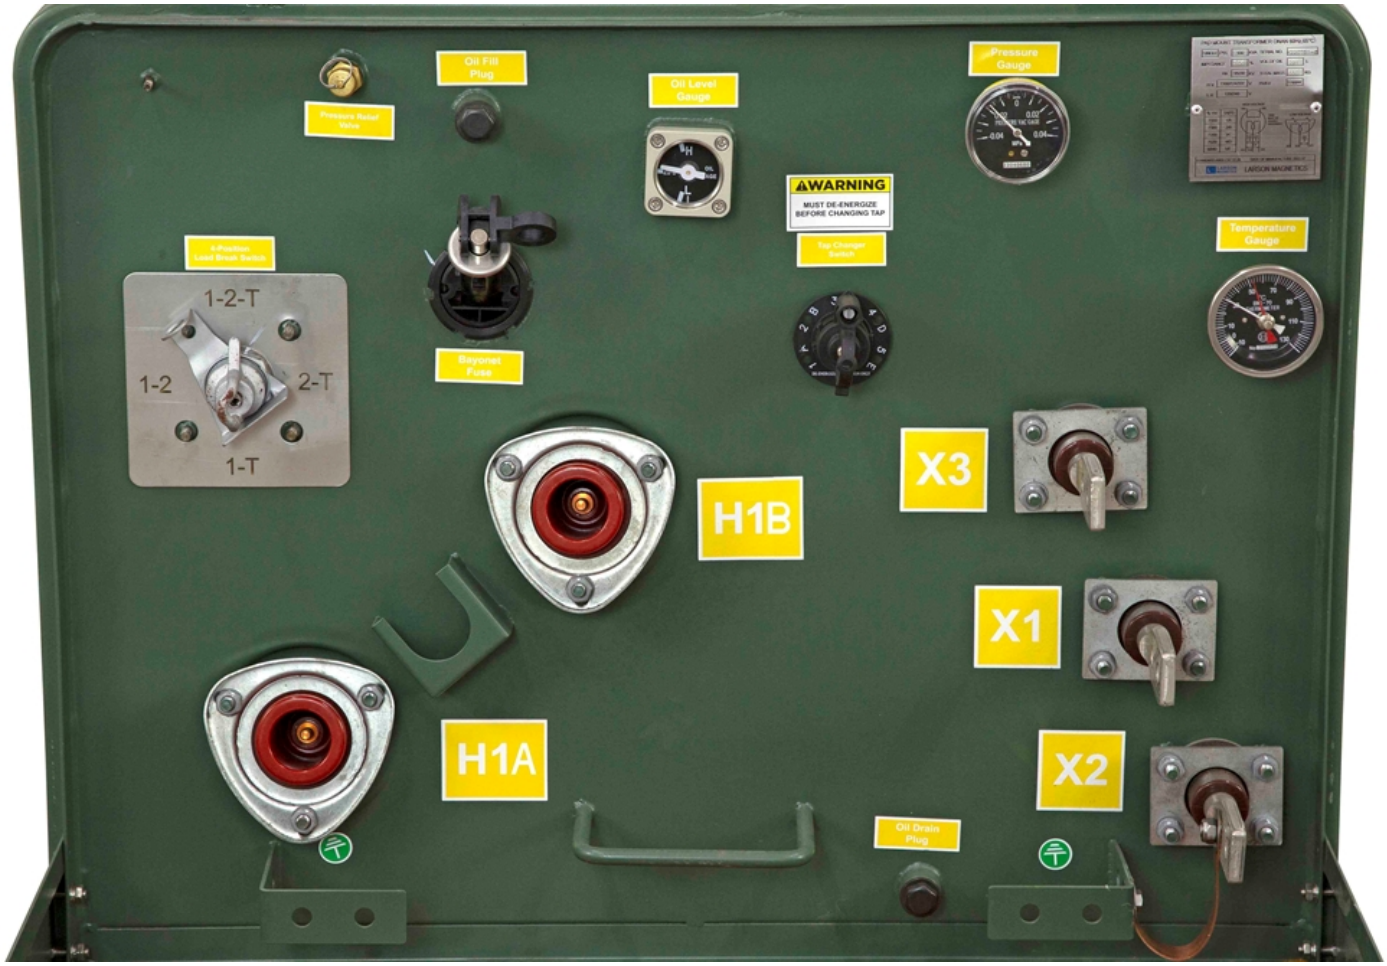





**Export Control Classification Number (ECCN):** EAR99

Links (Click on the below items to view):

- **Operations Manual**
- **HigResPic1**
- **HigResPic2**
- **HigResPic3**
- **HigResPic4**
- **HigResPic5**
- **Video1**
- **Video2**
- **Video3**
- **ISO 9001 Certification**
- **Business Certificate**
- **Shipping Time Map**