Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.498.3364

MT-PML-R7-1P-GMR-100KVA-SLZ-LT-LF-A6-BM-AZ-2C4-M1

100 KVA Pad Mount Transformer - 12470Y/7200 Grounded Wye Primary, 120/240V Secondary - Mineral Oil Fluid / ONAN - Aluminum Windings

Product ID: 322101

Please see last page for supporting documentation for this product (certificates, CAD files & drawings, IES files, wiring diagrams, etc).



Image: MT-PML-R7-1P-GMR-100KVA-SLZ-LT-LF-A6-BM-AZ-2C4-M1

Larson Electronics LLC manufactures a wide variety of products, including custom built to spec designs. The pictures displayed for this unit are a general representation of form factor for the product line and may not accurately represent this exact configuration in every detail due to custom builds and changes between similar products in our standard catalog. The specifics for this configuration are listed in the specification table and supporting documentation (CAD files, Dimensional Drawing, Name Plate Diagram, Wiring Diagram, etc.). This means that specific details (receptacles, plugs, wires, connections, mounting brackets, external finishes, etc.) may not be accurately represented in images vs specifications. Please review specifications and do not order based solely on images.

MT-PML-R7-1P-GMR-100KVA-SLZ-LT-LF-A6-BM-AZ-2C4-M1 Pad Mount Transformer

Transformer Type: Pad Mounted, Compartmental-Type II
Transformer Configuration: Liquid Filled Pad Mounted
Transformer Feed Type: Loop Feed
Phase: Single Phase
Capacity: 100 KVA
Vector Group: II6
Primary Voltage: 12470Y/7200
Primary Voltage Switch: N/A
Primary Voltage Class: 15 kV Class
Primary Phasor: Grounded Wye
Primary BIL: 95 KV
Secondary Voltage: 120/240V (L-N-L)
Secondary Voltage Class: 1.2 kV Class
Secondary Phasor: Dual Windings, Single Phase

Secondary BIL: 30 KV

Frequency: 60 Hz
Temperature Rise: 65°C
Cooling Class: ONAN; Self-Cooled
Forced Air (Fans): None

Ratings

Meets/Exceeds DOE 2016 Efficiency Ratings
Complies with ANSI / IEEE #C57.12.00
Complies with ANSI / IEEE #C57.12.25
Complies with ANSI / IEEE C57 12.28
Complies with ANSI / IEEE C57 12.38
Complies with ANSI / IEEE C57.12.70
Complies with ASTM D3487
Penta-head Entry Assembly
Lift Up Pad lockable Lid
Non-PCB Insulating Fluid
Tamper Proof Housing

Efficiency: 99.00%
Based on transformer operating at 50% of nameplate base kVA.

Load Losses Based on 85°C Reference Temp.
No Load Loss (in watts)*: +/- 273W
Load Loss (in watts)*: +/- 1105W

Tap Changer: 5-Position Tap Changer
Tap Qty: (2) FCAN Above Taps, (2) FCBN Below Taps
Tap %: 2.50%
Tap Changer Switch Location: Front Compartment
Impedance: 1.0-4.5% Typical
Primary Connection Type: Live Front
Primary Termination: Porcelain Bushings with Clamp-Type Terminals
Primary Connection Qty: (2) Primary Connections
Primary Surge Arrestors: Included, (2) High Elbow Surge Arrestors
Primary Surge Arrestor Voltage Rating: 15 kV
Primary Surge Arrestor MCOV Rating: 12.7 kV
Primary Surge Arrestor Mounting Provision: Included Boss Nuts Mounting Provisions for Installing Lightning Arrestor on H1 & H2 Primary Terminals
Primary Overcurrent Protection (OCP): Bayonet Expulsion Fuses in series w/ Isolation Links
Primary Overcurrent Protection Method: Fused
Primary Overcurrent Protection Holder: Bayonet Fuse Holder w/ Drip Shield
Primary Grounding Provisions: (1) Grounding lug, accepts #2 copper
Secondary Connection Type: Live Font
Secondary Connections: Non-porcelain bushings with clamp terminals
Secondary Over Current Protection (OCP): N/A
Secondary Connection Qty: (3)
Secondary Grounding Provisions: (1) Grounding lug, accepts #2 copper
Metering Current Transformer (CT): N/A
Metering Panel: N/A
Auxiliary Control Panel: N/A
Load Break Switch: 4-Position Load Break Switch
Load Break Switch Qty: (1)
Load Break Switch Rating: 200-Amp, 15 kV
Load Break Switch Location: High Voltage (HV) Front Compartment
Efficiency Standard(s): Meets DOE 2016 Standards, Meets ANSI/IEEE Standards
K-Factor Rating (Harmonic Mitigation): K-1 (Standard)
Pulse Drive Rating: N/A
Insulation Fluid: Mineral Oil, Non-PCB Fluid
Fluid Capacity*: 63.56 Gallons
Liquid Level Indicator: Analog Gauge
Temperature Indicator: Analog Gauge
Pressure/Vacuum Indicator: Analog Gauge
Pressure Relief Device: Included, Non-resettable, w/ a Pressure Relief Valve
Internal Fault Detector: Included
Fill Valve: Removable Bolt
Fill Valve Location: Front Compartment
Drain Valve: Included, w/ Sampler
Drain Valve Location: Front Compartment
Winding Material: Aluminum
Ambient Temperature Rating: 40°C
Sound Level: 51 dBA
Elevation (Altitude): 3300ft (1000 meters) Above Sea Level or Below
Core Material: Grain Oriented Silicon Steel
Tank Material: Coated Steel
Cabinet Material: Coated Steel
Base Platform Material: Coated Steel
Housing Type: Tamper Resistant w/ Pad-lockable Lift-up Lid
Paint Type: Weatherproof and UV Resistant Epoxy Coating and Undercoating
Finish Color: Munsell™ 7.0 GY 3.29/1.5 Bell Green
Mounting: Pad Mount
Conduit Opening: Bottom Feed Underground Entry/Exit
Dimensions*: 41.34"-W x 45.28"-D x 29.53"-H
Weight*: 1940.04 Lbs

Total Load Loss (in watts)*: +/- 1378W

Note: *Losses offered are typical only, not guaranteed*

Special Orders - Special Requirements
Contact us for special requirements
Toll Free: 1-800-369-6671
Intl: 1-903-270-1187
Fax: 1-903-765-7664
E-mail: sales@larsonelectronics.com

*Please note that numbers are approximate and subject to change

The MT-PML-R7-1P-GMR-100KVA-SLZ-LT-LF-A6-BM-AZ-2C4-M1 Industrial Pad Mount Transformer from Larson Electronics offers powerful, reliable and efficient power distribution in indoor, outdoor, and public locations. The low operating costs, low heat emissions and low cost of ownership make this transformer ideal for a wide range of applications and businesses. An enclosed design caters to installations on concrete pads without protective fencing.

PLEASE NOTE: ANY FREE SHIPPING OFFERS DO NOT APPLY TO POWER DISTRIBUTION PANELS, TRANSFORMERS, OR SUBSTATIONS*

Transformer Features: With a transformer rating of 100 kVA, the industrial transformer features a primary voltage of single-phase 12470Y/7200 Grounded Wye and a secondary voltage of single-phase 120/240V (L-N-L). The unit has a primary loop feed and live-front primary connections. We also offer systems with radial feed and dead front primary/live front secondary connections. This transformer features a 5-position tap changer with (2) +2.5% taps above and (2) -2.5% taps below to allow small changes in voltage. This pad mount transformer features primary porcelain bushings and standard spade connectors on the secondary side. Equipped with aluminum windings, this transformer consists of one coil and two core loops.

The MT-PML-R7-1P-GMR-100KVA-SLZ-LT-LF-A6-BM-AZ-2C4-M1 is air cooled and does not have fans or mounting provisions for fans. This unit features a 65°C temperature rise for reduced heat waste, increased reliability and longer life. The transformer meets DOE 2016 efficiency standards. The combination of low temperature rise and high efficiency makes this unit suitable for use in electrical rooms, air conditioned spaces in buildings, underground vaults and similar locations, in addition to outdoor areas.

Insulation Fluid: The MT-PML-R7-1P-GMR-100KVA-SLZ-LT-LF-A6-BM-AZ-2C4-M1 features mineral oil insulation fluid. We offer transformers with FR-3 oil fluid, if needed.

Gauges: The following gauges are included with the system: liquid level, temperature and pressure/vacuum gauges. Standard liquid level, temperature and pressure/vacuum gauges are analog, manual reading types. These gauges do not have auxiliary contacts.

Fault Pressure Devices: This transformer features an automatic action fault pressure device. Fault pressure devices are used to detect high rates of pressure rise within the tank.

Rapid Rise Relay: There are no rapid rise relays on the unit. This safety component is designed for protection when a rapid increase in tank pressure occurs. The relay is suitable for detecting sudden pressure fluctuations above predetermined safe limits.

Surge arresters: This system comes with surge protection. Mounting provisions for installing customer provided lightning arrestor on the H1 and H2 primary terminals are included for installing arresters in-field.

Load Breaker Switch: The MT-PML-R7-1P-GMR-100KVA-SLZ-LT-LF-A6-BM-AZ-2C4-M1 is equipped with an operated 4-position load break switch.

Valves: The MT-PML-R7-1P-GMR-100KVA-SLZ-LT-LF-A6-BM-AZ-2C4-M1 is equipped with a fill valve and drain valve with sampler port.

Protection Fuses: This transformer contains protection fuses on the primary side. For units without protection fuses, upstream protection is provided. We recommend provisions for protection fuses when possible, as blown fuses may require more frequent oil changes.

Mount: The heavy-duty enclosure makes the unit suitable for both indoor and outdoor applications. This power distribution system can be pad mounted on concrete pads.

Benefits: The MT-PML-R7-1P-GMR-100KVA-SLZ-LT-LF-A6-BM-AZ-2C4-M1 pad mount transformer offers many benefits to consumers. This transformer provides owners with significant energy savings, as well as offering environmental benefits. Higher efficiency not only extends the life of the transformer, but also turns into cost savings for owners in the form of lower energy bills and decreased cost of ownership.

Applications: General purposes, industrial sites, electrical rooms, underground vaults, manufacturing facilities, steel plants, offshore, commercial, military, processing plants, electric power distribution, utilities, public locations and more.

Larson Electronics is a manufacturer and as such can build stationary and portable transformer systems to your specifications. Although we carry several models of power distribution transformer systems, we can deliver custom ordered units almost as quickly as our prebuilt units. If this model does not meet your needs, please contact us at 1-800-369-6671 or sales@larsonelectronics.com to discuss your specific requirements.

Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.498.3364

Frequently Asked Questions (FAQ)

There are no Faqs

Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.498.3364



Image: MT-PML-R7-1P-GMR-100KVA-SLZ-LT-LF-A6-BM-AZ-2C4-M1

Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.498.3364

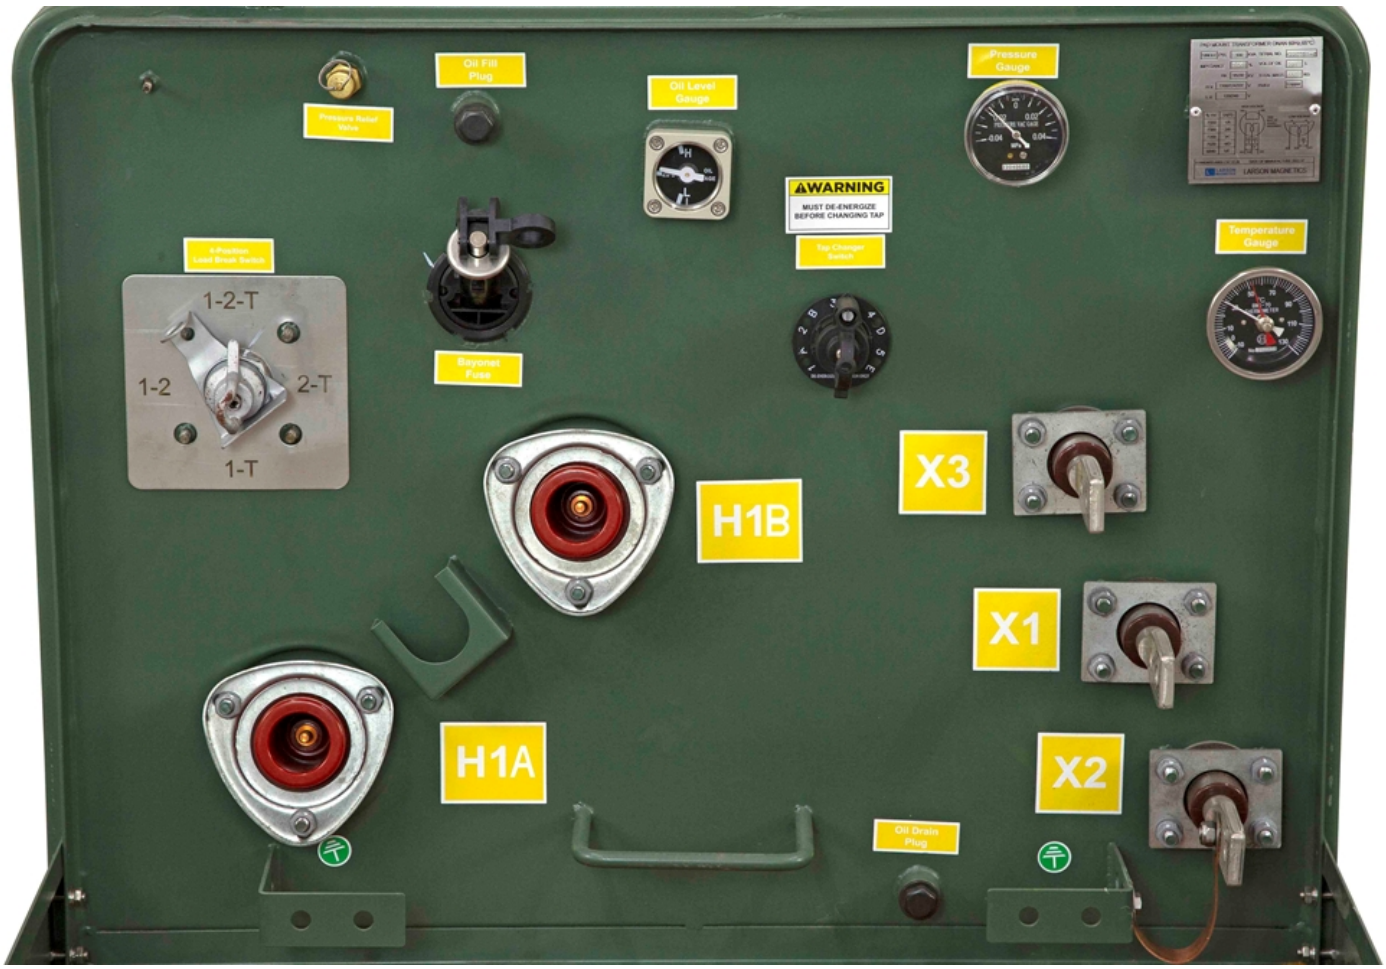


Image: MT-PML-R7-1P-GMR-100KVA-SLZ-LT-LF-A6-BM-AZ-2C4-M1



Image: MT-PML-R7-1P-GMR-100KVA-SLZ-LT-LF-A6-BM-AZ-2C4-M1

Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.498.3364



Image: MT-PML-R7-1P-GMR-100KVA-SLZ-LT-LF-A6-BM-AZ-2C4-M1

Export Control Classification Number (ECCN): EAR99

Links (Click on the below items to view):

- **HigResPic1** (https://www.larsonelectronics.com/images/product/HigResPic1/322101.JPG)
- **HigResPic2** (https://www.larsonelectronics.com/images/product/HigResPic2/322101.JPG)
- **HigResPic3** (https://www.larsonelectronics.com/images/product/HigResPic3/322101.JPG)
- **HigResPic4** (https://www.larsonelectronics.com/images/product/HigResPic4/322101.JPG)
- **HigResPic5** (https://www.larsonelectronics.com/images/product/HigResPic5/322101.JPG)
- **Video1** (https://www.youtube.com/watch?v=mpt7J5hdJp8)
- **Video2** (https://www.youtube.com/watch?v=KIzsyVtvSWM)
- **Video3** (https://www.youtube.com/watch?v=mN2qPmdLwW4)
- **ISO 9001 Certification** (http://larsonelectronics.com/images/pdfdocs/ISO9001.PDF)
- **Business Certificate** (https://www.larsonelectronics.com/images/pdfdocs/w9.PDF)
- **Shipping Time Map** (https://www.larsonelectronics.com/images/product/ShippingTimeMap/ShippingTimeMap.pdf)