

MT-CTX-400V-0.5KVA-230V

0.5 kVA Isolation Control Transformer - 400V Input Voltage - 230V Output Voltage

Product ID: 265284



Larson Electronics LLC manufactures a wide variety of products, including custom built to spec designs. The pictures displayed for this unit are a general representation of form factor for the product line and may not accurately represent this exact configuration in every detail due to custom builds and changes between similar products in our standard catalog. The specifics for this configuration are listed in the specification table and supporting documentation (CAD files, Dimensional Drawing, Name Plate Diagram, Wiring Diagram, etc.). This means that specific details (receptacles, plugs, wires, connections, mounting brackets, external finishes, etc.) may not be accurately represented in images vs specifications. Please review specifications and do not order based solely on images.

MT-CTX-400V-0.5KVA-230V Control Transformer

Phase: Single Phase
Frequency: 50/60 Hz
kVA: 0.5 kVA (500 VA)
Primary Voltage: 400 V
Primary Connection: Series (V)
Primary FCAN (Std.): 0 x 0%
Primary FCBN (Std.): 0 x 0%
Secondary Voltage: 230 V
Secondary Connection: Parallel x Series (Vx2V)
Material: Copper
Primary Termination: Terminal Block
Secondary Termination: Terminal Block
Insulation: 130°C
Temperature Rise: 80°C
Enclosure Material: Injection Molded Cover
Mounting: Heavy Steel Feet
Dimensions: 7.19"H x 5.25"W x 4.75"D
Weight: 26.6 lb

Approvals/Ratings

Listing: UL Listed
Approved for US and Canada
CE Mark Standard
RoHS Compliant
EN61558-2-2
CSA 22.2 NO 66.1; CSA 22.2 NO 66.2
UL 5085-1; UL 5085-2

Special Orders- Requirements

Contact us for special requirements
Toll Free: 1-800-369-6671
Intl: 1-214-616-6180
Fax: 1-903-498-3364
E-mail: sales@larsonelectronics.com

The MT-CTX-400V-0.5KVA-230V from Larson Electronics is a 400 V Single Phase Control Transformer that is powerful, reliable and innovatively designed. With high-quality silicon steel laminations providing optimal performance, the MT-CTX-400V-0.5KVA-230V provides increased reliability and protection against critical equipment failures. This control transformer features an innovative design with a unique terminal block design that allows for a quick and easy hook up along with the ability to easily install fuse clips to the unit. The uniquely designed molded coil

covers give this control transformer superior cooling abilities and a sleek appearance.

Transformer Features: With a transformer rating of 0.5 kVA (500 VA), the MT-CTX-400V-0.5KVA-230V is a machine tool industrial single phase control transformer with a primary voltage of 400 V. It also provides a secondary voltage of 230 V. Featuring compact and innovative construction, this unit's cores are manufactured with high-quality silicon steel laminations using state of the art technology.

This unit boasts an innovative terminal block design that allows for easy hookup. Connecting this unit is a simple task thanks to the terminal connection numbers being molded into the terminal block which corresponds to the nameplate and wiring diagrams. A unique fin-shaped, injection molded coil cover gives this unit superior cooling abilities. The unit also features a 130°C insulation class with a 80°C temperature rise.

Benefits: The MT-CTX-400V-0.5KVA-230V control transformer offers many benefits to the consumer. Full encapsulation of the windings and internal terminations ensures that the unit is protected from moisture, dirt, dust and other contaminants. Removeable finger safe terminal covers contribute towards the overall clean and sleek look of the unit. The compact and innovative design features make this a great choice for industrial tool applications.

This control transformer has heavy steel mounting feet that are either welded or bolted to the core. This transformer features terminal block terminations.

Applications: Power Managment, Industrial


Larson Electronics is a manufacturer and as such can build stationary and portable transformer systems to your specifications. Although we carry several models of power distribution transformer systems, we can deliver custom ordered units almost as quickly as our prebuilt units. If this model does not meet your needs, please contact us at 1-800-369-6671 or sales@larsonelectronics.com to discuss your specific requirements.



Wiring Diagram

WARNING: DO NOT SERVICE WHILE ENERGIZED!

MT-CTX-400V-0.5KVA-230V

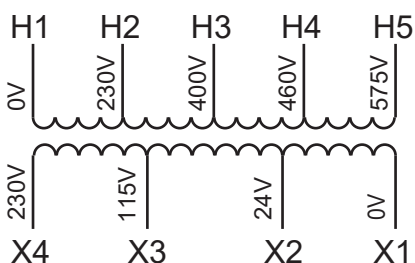

Primary Volts	Connect Lines To
400	H1-H3

Secondary Volts	Connect Lines To
230	X1-X4



LARSON
ELECTRONICS

MMT-240.480-500VA-120.240

High Voltage (HV)
(Primary)

480

240

Low Voltage (LV)
(Secondary)

240

120

Install Supplied Jumpers
Between Terminals

H2-H3

H1-H3, H2-H4

Install Supplied Jumpers
Between Terminals

X2-X3

X1-X3, X2-X4

Supply Lines
Connect to


H1, H4

H1, H4


Load Lines
Connect to

X1, X4

X1, X4



NRTL listed for United States / NRTL listed for Canada / Built to NEMA ST-20 Standards / Built to UL-50 Standards

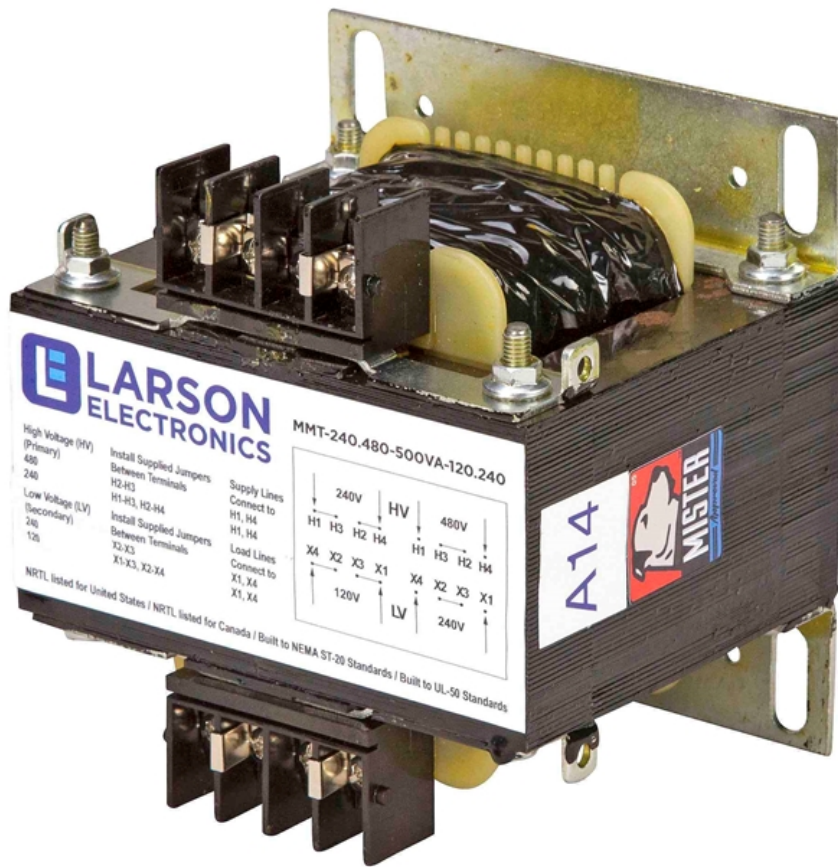

LARSON
ELECTRONICS

MMT-240.480-500VA-120.240

High Voltage (HV)
(Primary)
480
240

Install Supplied Jumpers
Between Terminals

H2-H3

H1-H3, H2-H4

Low Voltage (LV)
(Secondary)
240
120

Install Supplied Jumpers
Between Terminals

X3-X3

X1-X3, X2-X4

Supply Lines

Connect to

H1, H4


H1, H4

Load Lines

Connect to


X1, X4

X1, X4



NRTL listed for United States / NRTL listed for Canada / Built to NEMA ST-20 Standards / Built to UL-50 Standards



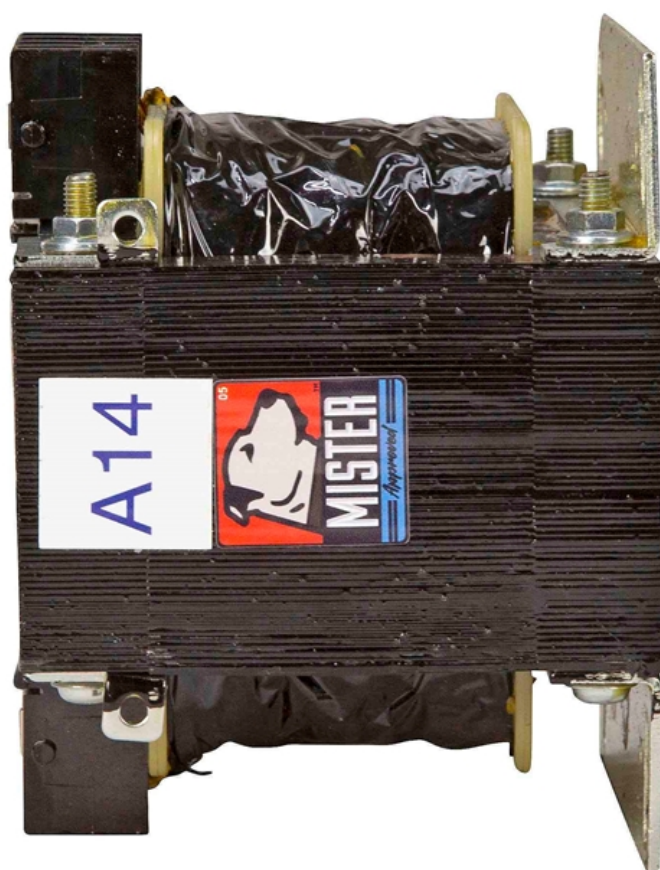



Frequently Asked Questions (FAQ)