

IND-PNL-LCS-PLC-SLV-2XRLY-277.24V

PLC Lighting Control Station Box - Slave Station - (1) 6A Fuse (2) Relays - Din Rail Mount - NEMA

Product ID: 150690

Please see last page for supporting documentation for this product(certificates, CAD files & drawings, IES files, wiring diagrams, etc).



Larson Electronics LLC manufactures a wide variety of products, including custom built to spec designs. The pictures displayed for this unit are a general representation of form factor for the product line and may not accurately represent this exact configuration in every detail due to custom builds and changes between similar products in our standard catalog. The specifics for this configuration are listed in the specification table and supporting documentation (CAD files, Dimensional Drawing, Name Plate Diagram, Wiring Diagram, etc.). This means that specific details (receptacles, plugs, wires, connections, mounting brackets, external finishes, etc.) may not be accurately represented in images vs specifications. Please review specifications and do not order based solely on images.

IND-PNL-LCS-PLC-SLV-2XRLY-277.24V PLC Lighting Control Station Box

Unit Type: Slave Station

Dimensions: 12" x 12" x 6"

Weight: -

Input Voltage: 277V AC

Control Supply Voltage: 24V

Fuse: (1) 6A

Relays: 2

Materials: Powder Coated Steel

Mount: Din Rail Mount

Features/Ratings

NEMA 3R

Slave Station to Master Station

Special Orders - Special Requirements

Contact us for special requirements

Toll Free: 1-800-369-6671

Intl: 1-903-270-1187

E-mail: sales@larsonelectronics.com

Made in the USA

The Larson Electronics IND-PNL-LCS-PLC-SLV-2XRLY-277.24V PLC Lighting Control Station Box can be used to automate and control industrial fixtures. This unit is a slave station and requires connection with a master station. Constructed of powder coated steel, the box features an input voltage of 277V and a control voltage of 24V, as well as one 6-amp fuse and two relays.

The IND-PNL-LCS-PLC-SLV-2XRLY-277.24V is a slave station for a PLC lighting control station box. On the input side, operators bring in 277V from a preferred lighting supply. Protected by a 6-amp fuse, the unit contains two relays, which

operates on 24V from the PLC. This allows the control of 277V connected lighting fixtures located downstream. A master station is required to complete the entire system. This slave station is constructed of powder coated steel. A NEMA 3R rated enclosure ensures protection from moisture and dust in the work site.


Mounting/Wiring: The IND-PNL-LCS-PLC-SLV-2XRLY-277.24V is compatible with din rail mounting configurations. This mounting solution provides space-saving benefits during installation.

Applications: Lighting control, automation, industrial plants and more.

At Larson Electronics, we do more than meet your lighting needs. We also provide replacement, retrofit, and upgrade parts as well as industrial grade power accessories. Our craftsmen can custom build any lighting system and/or accessories to fit the unique demands of your operation. A commitment to honesty, quality, and dependability has made Larson Electronics a leader in the lighting and electronics business since 1973. Contact us today at 800-369-6671 or message sales@larsonelectronics.com for more information about our custom options tailored to meet your specific industry needs.

Frequently Asked Questions (FAQ)



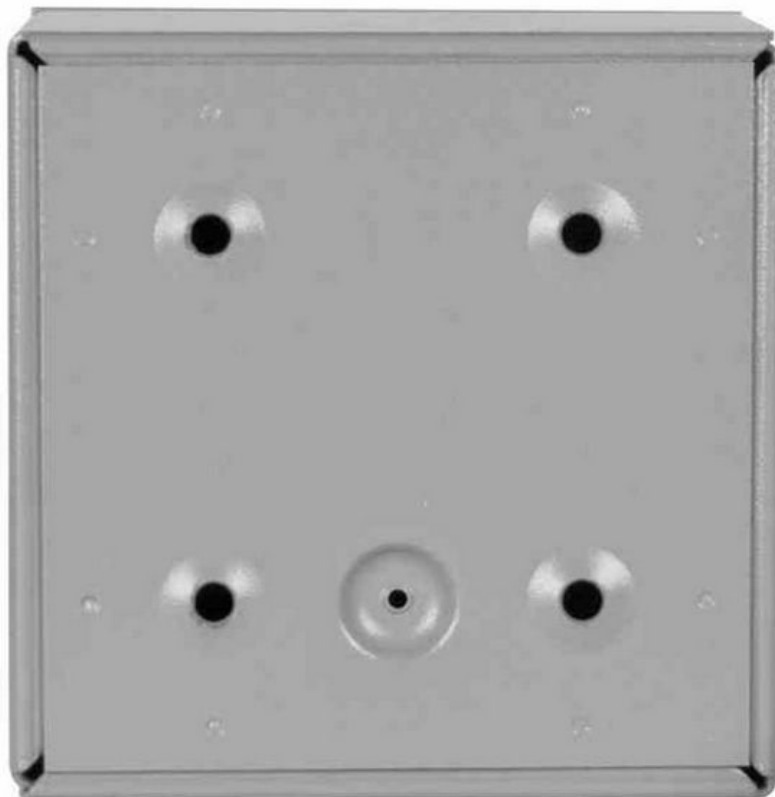

IND-PNL-LCS-PLC-SLV-2XRLY-277.24V

Product ID: 150690

Export Control Classification Number (ECCN): EAR99

Links (Click on the below items to view):

- [Wiring Diagram \(Online\)](#)
- [HigResPic1](#)
- [HigResPic2](#)
- [HigResPic3](#)
- [ISO 9001 Certification](#)
- [Business Certificate](#)
- [Shipping Time Map](#)