

EXP-MS-30W-N4X-SFC

Explosion Proof Motion Sensor - 11.5' to 25' Mounting Height - 13'x16' Coverage - Flat Surface Mount

Product ID: 151245

Please see last page for supporting documentation for this product(certificates, CAD files & drawings, IES files, wiring diagrams, etc).



Larson Electronics LLC manufactures a wide variety of products, including custom built to spec designs. The pictures displayed for this unit are a general representation of form factor for the product line and may not accurately represent this exact configuration in every detail due to custom builds and changes between similar products in our standard catalog. The specifics for this configuration are listed in the specification table and supporting documentation (CAD files, Dimensional Drawing, Name Plate Diagram, Wiring Diagram, etc.). This means that specific details (receptacles, plugs, wires, connections, mounting brackets, external finishes, etc.) may not be accurately represented in images vs specifications. Please review specifications and do not order based solely on images.

EXP-MS-30W-N4X-SFC Explosion Proof Tumbler Switch

Listing: United States
Dimensions: 7"-W x 5"-H x 9"-D
Detection: Motion
Detection Coverage: 13' x 16' (when mounted at 16')
Tilt Angles: -90° to +30° in elevation
Max Contact Voltage: 42V AC/DC
Max Contact Current: 1A (resistive)
Max Switching Power: 30W (DC) / 60VA (AC)
Output Hold Time: 0.5-9 seconds (Adjustable)
Reaction Time: 100 ms
Minimum Detection Speed: 2.2in/s
Mains Frequency: 50/60 Hz
Ambient Temperature Range: -22°F to +140°F
Radiated Frequency: 24.125 GHz
Transmitter Radiated Frequency: <20 dBm, EIRP
Radiated Power Density: <5 mW/cm²

Certifications - Compliance

Class I, Division 1 & 2, Groups B, C, D
Class II, Division 1 & 2, Groups E, F, G
Class III
Class 1, Zone 1, AEx d IIC
EExd IIC, IP66
NEMA 4X
NEMA 7 (Groups B, C, D)
NEMA 9 (Groups E, F, G)
EMC: 2004 / 108 / EC
R&TTE: 1999 / 5 / EC

Special Orders- Requirements

Contact us for special requirements

Toll Free: 1-800-369-6671

Intl: 1-903-270-1187

Fax: 1-903-498-3364

E-mail: sales@larsonelectronics.com

The Larson Electronics EXP-MS-30W-N4X-SFC Explosion Proof motion sensor is approved Class 1 Division 1 & 2 and Class 2 Division 1 & 2 and the ability to power lights or other equipment within hazardous locations based on motion triggers.

This explosion proof motion sensor is ideal for operators seeking a high quality

explosion proof motion sensor rated for use in hazardous areas designated Class 1 Division 1 and Class 2 Division 1. This explosion proof motion detector can be mounted at heights ranging from 11.5` up to 23` above the ground and provides up to 13` by 16` coverage when mounted at 16`. The entire unit is constructed of malleable non sparking aluminum construction with a glass window for viewing the indication lights inside. This unit is flat surface mounted. The explosion proof housing provides two 1/2" or 3/4" hub openings located on either side of the housing for running electrical conductors in a feed through configuration. A bushing seal at each conductor opening prevents damage to wiring insulation. This unit leverages cutting-edge microwave sensors to detect motion. When in use, the device sends out discreet waves that are reflected back from nearby walls and objects (not heat or light). Microwave sensors are not affected by line of sight, resulting in wider and more accurate coverage of the target area. By comparison, traditional infrared sensors can only detect heat and light (factors used to identify movement) within the unit's field of view. Microwave sensors also provide stable performance in unpredictable climates and can penetrate glass, plastic and other non-metallic objects.



[Click Photo to Enlarge](#)

[Click Photo to Enlarge](#)

[Click Photo to Enlarge](#)

This unit is designed to operate on low voltage 12-24V AC or DC electrical systems, and is suitable for use in environments where combustible dusts and particulates may be present.

1/2" or 3/4" NPT tapped conduit openings are provided on either of the unit in feed through versions while dead end versions have a single conduit hub, providing easy and secure connection to main power line supplies.


Suggested Applications: Manufacturing, Industrial, Warehouse, Lighting, Lighting, Wet areas or Locations Where Combustible Dust is Present.

At Larson Electronics, we do more than meet your lighting needs. We also provide replacement, retrofit, and upgrade parts as well as industrial grade power accessories. Our craftsmen can custom build any lighting system and/or accessories to fit the unique demands of your operation. A commitment to honesty, quality, and dependability has made Larson Electronics a leader in the lighting and electronics business since 1973. Contact us today at 800-369-6671 or message sales@larsonelectronics.com for more information about our custom options tailored to meet your specific industry needs.

Frequently Asked Questions (FAQ)





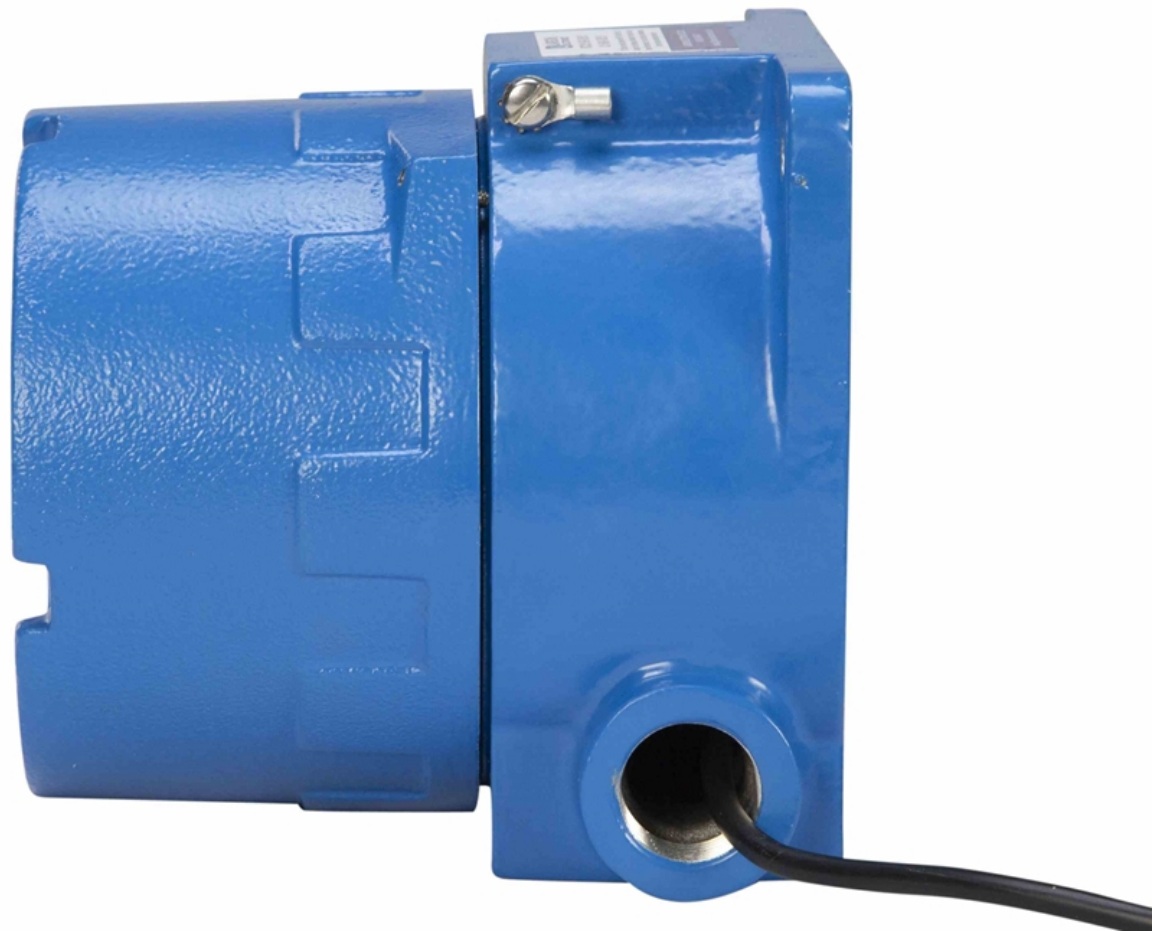



EXP-MS-30W-N4X-SFC

Product ID: 151245

Harmonized System (HS) Code: 8543.70.4000

Export Control Classification Number (ECCN): EAR99

Links (Click on the below items to view):

- [Operations Manual](#)
- [SpecSheetSpanish](#)
- [HigResPic1](#)
- [HigResPic2](#)
- [HigResPic3](#)
- [HigResPic4](#)
- [HigResPic5](#)
- [HigResPic6](#)
- [HigResPic7](#)
- [HigResPic8](#)
- [HigResPic9](#)
- [HigResPic10](#)
- [ISO 9001 Certification](#)
- [Business Certificate](#)
- [Shipping Time Map](#)