Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.498.3364

**MT-PML-R7-3P-GMR-2.5MVA-DC-LT-DF-A6-CB-CZ-2B6-M3**

# 2.5 / 2.8 MVA Pad Mount Transformer - 12470Y/7200 Grounded Wye Primary, 600V Delta Secondary - KNAN/Bell Green

**Product ID: 295465**



**Larson Electronics LLC manufactures a wide variety of products, including custom built to spec designs. The pictures displayed for this unit are a general representation of form factor for the product line and may not accurately represent this exact configuration in every detail due to custom builds and changes between similar products in our standard catalog. The specifics for this configuration are listed in the specification table and supporting documentation (CAD files, Dimensional Drawing, Name Plate Diagram, Wiring Diagram, etc.). This means that specific details (receptacles, plugs, wires, connections, mounting brackets, external finishes, etc.) may not be accurately represented in images vs specifications. Please review specifications and do not order based solely on images.**

| MT-PML-R7-3P-GMR-2.5MVA-DC-LT-DF-A6-CB-CZ-2B6-M3 Pad Mount Transformer | Ratings |
|---|---|
| **Transformer Type:** Pad Mounted, Compartmental-Type | Meets/Exceeds DOE 2016 Efficiency Ratings |
| **Transformer Configuration:** Liquid Filled Pad Mounted | Meets/Exceeds CSA Efficiency Ratings |
| **Transformer Feed Type:** Loop Feed | Complies with ANSI / IEEE C57.12.00 |
| **Operation:** Step-Down Operation (Not Approved for Step-Up) | Complies with ANSI / IEEE C57 12.28 |
| **Phase:** Three Phase | Complies with ANSI / IEEE C57 12.29 |
| **Capacity @ 55°:** 2.5 MVA (2500 KVA) | Complies with ANSI / IEEE C57 12.34 |
| **Capacity @ 65:** 2.8 MVA (2800 KVA) | Complies with ANSI / IEEE C57 12.35 |
| **Vector Group: YnD1** | Complies with ANSI / IEEE C57.12.70 |
| **Primary Voltage:** 12470GrdY/7200 | Complies with ANSI / IEEE C57.12.110 |
| **Primary Voltage Switch:** N/A | Complies with ANSI / IEEE C57.12.131 |
| **Primary Voltage Class:** 15 kV Class | Complies with ANSI / IEEE C62.11 |
| **Primary Phasor:** Grounded Wye | Complies with ANSI / IEEE C62.22 |
| **Primary BIL:** 95 KV | Complies with ANSI / IEEE 386 |
| **Secondary Voltage:** 600V | Complies with ANSI / IEEE C2 |
| **Secondary Voltage Class:** 1.2 kV Class | Complies with ANSI / IEEE C37.47 |
| **Secondary Phasor:** Delta | Complies with ANSI Z535.4 |
| **Secondary BIL:** 30 KV | Complies with ASTM D3487 |
| **Frequency:** 60 Hz | Complies with ASTM D6871 |
| **Temperature Rise:** 55°C / 65°C | Complies with NEMA 260-1996 |
| **Insulation Rating:** Class E Insulation - 120°C, 248°F | Complies with 10 CFR Part 431 |
| **Cooling Class:** KNAN; Self-Cooled | Complies with CSA C2.1-06 |
| **Forced Air (Fans):** None | Complies with CSA C50 |
| **Tap Changer:** 5-position Tap Changer | Complies with CSA C88 |
| **Tap Qty:** (2) FCAN Above Taps, (2) FCBN Below Taps | Complies with CSA C88.1 |
| **Tap %:** 2.5% | Complies with CSA C88-16 |
| **Tap Changer Switch Rating:** 200-Amp, 15 kV | Complies with CSA C227.4 |
| **Tap Changer Switch Location:** High Voltage (HV) [Left Side] Front Compartment | Complies with CSA C227.5 |
| **Impedance:** 5.0-7.5% Typical, Target 5.75% | Complies with CSA C802-3 |

**Primary Connection Type:** Dead Front
**Primary Termination Arrangement:** V Terminal Arrangement
**Primary Termination:** Externally Clamped Well Bushings w/ Removable Studs, 200A Load Break Elbows
**Primary Connection Qty:** (6) Primary Connections for use w/ Elbow Connectors
**Primary Parking Stand Qty:** (6) Welded Brackets for Installing Accessory Parking Stand Bushings
**Primary Bushing Rating:** 15 kV Class, 95 kV BIL, 200A, Load Break, IEEE 386 Color Red
**Primary Neutral Connection:** Externally Clamped 250A Porcelain Bushings H0 w/ NEMA Spade Terminals, 2-Hole Spade, Accepts up to (2) Double Lug connections with (1) cables per side of Spade connector, w/ H0 Neutral Grounded to Tank via 1/2"-13 UNC Tapped Hole, 7/16" Deep Bung & Copper Ground Strap
**Primary Surge Arrestors:** (3) High Voltage Elbow Surge Arrestors, Included
**Primary Surge Arrestor Voltage Rating:** 10 kV Class Elbow Arrestor
**Primary Surge Arrestor MCOV Rating:** 8.4 kVrms
**Primary Over Current Protection (OCP):** (3) 125A Rated Bayonet Expulsion Fuse in series w/ (3) Partial-Range Current-Limiting Fuse
**Primary Over Current Protection Method:** Fused, Oil-Immersed
**Primary Over Current Protection Holder:** Bayonet Fuse Holder w/ Flapper Valve and External Drip Shield
**Primary Grounding Provisions:** (1) NEMA Ground Bar attached to tank via (2) Welded Ground Bungs in HV Cabinet
**Secondary Connection Type:** Live Front, External Throat Connection on Right Side of Tank
**Secondary Termination Arrangement:** Inline Terminal Arrangement in 34.9"-W x 14.95" Flanged Throat
**Secondary Connections:** NEMA Spade Terminals, 10-Hole Spade, Externally Clamped, Accepts up to (10) Double Lug connections with (5) cables per side of Spade connector
**Secondary Connection Qty:** (3) Externally Clamped One-Piece Epoxy Bushings Copper Threaded Studs
**Secondary Connection Supports:** N/A
**Secondary Over Current Protection (OCP):** N/A
**Secondary Neutral Connection:** Secondary X2 Neutral Grounded to Tank via 1/2"-13 UNC Tapped Hole, 7/16" Deep Bung & Copper Ground Strap
**Secondary Grounding Provisions:** (1) NEMA Ground Bar attached to tank via (2) Welded Ground Bungs in LV Cabinet
**Metering Current Transformer (CT):** N/A
**Metering Panel:** N/A
**Auxiliary Control Panel :** Terminal Block Enclosure for Aux Contacts from Gauges, Located in Base of LV Cabinet, mounted to HV/LV Barrier
**Load Break Switch:** 2-Position Load Break Switch
**Load Break Switch Qty:** (3)
**Load Break Switch Rating:** 200-Amp, 15 kV
**Load Break Switch Location:** High Voltage (HV) Front Compartment
**Efficiency Standard(s):** Meets DOE 2016 Standards, Meets CSA Standards Meets ANSI/IEEE Standards
**K-Factor Rating (Harmonic Mitigation):** K-1 (Standard)
**Pulse Drive Rating:** N/A
**Insulation Fluid:** Biodegradable Natural Vegetable Oil Ester Insulating Fluid - Non-PCB Fluid
**Fluid (Oil) Capacity*:** 310 Gallons
**Fluid (Oil) Weight*:** 2,410 lb
**Liquid Level Indicator:** Analog Dial Gauge w/ (2) Dry Type Form C Auxiliary Contacts (1NO + 1NC) for Remote Alarm Trip for High & Low Levels
**Temperature Indicator:** Analog Dial Gauge w/ (2) Dry Type Form C Auxiliary Contacts (1NO + 1NC) for Remote Alarm Trip for High & Low Temps
**Pressure/Vacuum Indicator:** Analog Dial Gauge w/ (2) Dry Type Form C Auxiliary Contacts (1NO + 1NC) for Remote Alarm Trip
**Pressure Relief Device:** Included, Automatic Action
**Fault Indicator:** N/A
**Gas Sampler Valve:** Included, Schrader Valve
**Fill Valve:** 1" NPT Port w/ Removable Bolt Plug
**Fill Valve Location:** Front Compartment
**Drain Valve:** 1" NPT Port w/ 5/8" NPT Sampler Valve
**Drain Valve Location:** Front Compartment
**Winding Material: Aluminum**
**Ambient Temperature Rating: 40°C**
**Ambient Operating Temperature Range: -40°C to +40°C (-50°F to +104°F)**

**Sound Level: 62 dBA**

**Elevation (Altitude): 3300ft (1000 meters) Above Sea Level**
**Core Material:** Grain Oriented Steel
**Tank Material:** Coated Steel

Complies with CSA C802.1

**Features**

Pentahead Bolt Entry Assembly
High-Fire Point Insulating Fluid
Non-PCB Insulating Fluid
Tamper Proof Housing
Hinged Front Compartment Doors, Pad Lockable
NEMA 3R Wiring Compartment
Hot Stick Included, HV Door Mount

**Efficiency %:** 99.40%

*Based on transformer operating at 50% of nameplate base kVA.*

**Load Losses Based on 85°C Reference Temp.**

**No Load Loss (in watts):** +/- 2,700W

**Full Load Loss (in watts) at 100%:** +/- 15,500W

**Total Load Loss (in watts) at 100%:** +/- 18,200W

**Total Losses at 55°C LL Temp.& 20°C NL Temp.**

**Total Load Loss (in watts) at 50%:** +/- 6,408W

***Note: Losses offered are typical only, not guaranteed***

**Labeling:**

Externally Stencilled (Painted) KVA Rating
Externally Stencilled (Painted) Voltage Rating
External Non-PCB Label
External Warning & Danger Label
External Barcode Label
Internal Busing & Accessory Labeling
Stainless Steel Riveted Nameplate

**Factory Tests:**

Winding Resistance Test
Insulation Resistance Test
Voltage Ratio Error Test
Short-circuit Impedance Test
No-load Loss (Wattage) Test
Load Loss (Wattage) Test
Induced Voltage Withstand Test
Separate Source Voltage Withstand Test
Pressure Integrity Test Test

**Shipping:**

Shipped on pallet on open flatbed
Palletized on Wooden Pallet w/ Skid Pockets
Pallet Skid Facing Outward Sides of Truck
***Note: Crated shipping in lieu of palletizing can be done upon request for an additional fee***

**Cabinet Material:** Coated Steel
**Base Platform Material:** Coated Steel
**Portability:** Lifting lugs, provisions for jacking under base, w/ base construction suitable for using rollers or skidding
**Housing Type:** Compartmental Air-Filled Cabinet w/ Locking Doors, HV Compartment Left, LV Compartment Right, Steel Barrier Separation, HV Door Spring-Loaded Release Pin in LV Compartment
**Enclosure Rating:** NEMA 3R Weatherproof Wiring Cabinet, Sealed Tank
**Seismic Rating:** Yes
**Paint Type:** Weatherproof and UV Resistant Epoxy Coating and Undercoating
**Finish Color:** Munsell™ 7.0 GY 3.29/1.5 Bell Green
**Mounting:** Pad Mounted
**Conduit Opening:** Bottom Feed Underground Entry/Exit
**HV Compartment Base Wireway Dimensions*:** 21"-7 x 7"-D
**LV Compartment Base Wireway Dimensions*:** 26"-W x 7"-D
**MV/LV Compartment Cabinet Depth*:** 24"-D
**Tank Cover Access Handhole:** 10"-H x 16"-W Bolted Cover Tank Access Hole
**Dimensions*:** 75"-W x 75"-D x 73"-H
**Dry Weight (w/o Oil)*:** 4,918 lb
**Total Weight (Liquid Filled)*:** 11,534 lb
*Please note that numbers are approximate and subject to change

**Special Orders - Requirements**
Contact us for special requirements

**Toll Free:** 1-800-369-6671
**Intl:** 1-214-616-6180
**Fax:** 1-903-498-3364
**E-mail:** sales@larsonelectronics.com

**The MT-PML-R7-3P-GMR-2.5MVA-DC-LT-DF-A6-CB-CZ-2B6-M3 from Larson Electronics is an Industrial Pad Mount Transformer that offers powerful, reliable, and efficient power distribution in indoor, outdoor, and public locations. The low operating costs, low heat emissions, and low cost of ownership makes this transformer ideal for a wide range of applications and businesses. An enclosed design caters to installations on concrete pads without protective fencing.**

***PLEASE NOTE: ANY FREE SHIPPING OFFERS DO NOT APPLY TO POWER DISTRIBUTION PANELS, TRANSFORMERS, OR SUBSTATIONS****

**Transformer Features:** With a transformer rating of 2.5/ 2.8 MVA , the industrial transformer features a dual rated primary voltage of three-phase 12470Y/7200 grounded Wye and a secondary voltage of three-phase 600V Delta. An input voltage switch allows the transformer to be switched between primary voltages. The unit has a primary loop feed for single installations and dead-front primary connections. This transformer features a 5-position tap changer with two, +/- 2.5% taps above and two, +/- 2.5% taps below to allow small changes for voltage.

This transformer consists of rectangular coil and five-legged wound core design with three coils and four core loops (this is for three-phase transformers only; single-phase units have one coil and two core loops).

The MT-PML-R7-3P-GMR-2.5MVA-DC-LT-DF-A6-CB-CZ-2B6-M3 is air cooled and does not have fans or mounting provision for fans.

**Temperature Rise:** This unit features a dual rated 55°C / 65°C temperature rise for reduced heat waste, increased reliability and longer life. At 55°C, the transformer offers 2.5 MVA (2500 KVA). At 65°C, the transformer offers 2.8 MVA (2800 KVA). The transformer meets standard efficiency requirements. The combination of low temperature rise and high efficiency makes this unit suitable for use in electrical rooms, air conditioned spaces in buildings, underground vaults and similar locations, in addition to outdoor areas.

**Insulation Fluid:** The MT-PML-R7-3P-GMR-2.5MVA-DC-LT-DF-A6-CB-CZ-2B6-M3 features biodegradable cooling fluid (KNAN) with a capacity of 310 gallons. We offer transformers with FR-3 oil fluid, if needed.

**Biodegradable Fluid:** Biodegradable cooling fluid (vegetable oil) has a higher heat capacity compared to mineral oil, making the liquid safer to use and more reliable during operations. Vegetable oil has a higher flash point and fire point than mineral oil, hydrocarbon oil, silicone oil and synthetic ester. This cooling fluid is also non-toxic and can tolerate higher breakdown voltages than mineral oil. When operating at high temperatures, biodegradable cooling liquid sustains up to 120% loan conditions, which helps preserve the transformer's lifespan and

performance.
**Gauges:** The following gauges are included with the system: liquid level, temperature and pressure/vacuum gauges. Standard liquid level, temperature and pressure/vacuum gauges are analog, manual reading types. These gauges do not have auxiliary contacts.
**Fault Pressure Devices:** This transformer features an automatic action fault pressure device. Fault pressure devices are used to detect high rates of pressure rise within the tank.
**Rapid Rise Relay:** There are no rapid rise relays on the unit. This safety component is designed for protection when a rapid increase in tank pressure occurs. The relay is suitable for detecting sudden pressure fluctuations above predetermined safe limits.
**Surge Arrestors:** This system comes with high elbow surge arrestors on the primary side. Designed for over-voltage and transient voltage protection, the components prevent damage caused by lightning, internal switching or voltage surges. We can offer models without high elbow surge arrestors that have mounting provisions for customer-provided surge arrestors.
**Load Break Switch:** This transformer is equipped with three independently operated 2-position load break switches. One is for the transformer, one is for the Primary A lines, and one is for the Primary B lines.
**Valves:** The MT-PML-R7-3P-GMR-2.5MVA-DC-LT-DF-A6-CB-CZ-2B6-M3 is equipped with a pressure relief valve, fill valve, and drain valve with sampler port.
**Protection Fuses:** This transformer does not contain protection fuses. For units without protection fuses, up stream protection is provided. We recommend provisions for protection fuses when possible, as blown fuses may require more frequent oil changes.
**Mount:** The heavy-duty enclosure makes the unit suitable for both indoor and outdoor applications. This power distribution system can be pad mounted on concrete pads.
**Benefits:** The MT-PML-R7-3P-GMR-2.5MVA-DC-LT-DF-A6-CB-CZ-2B6-M3 pad mount transformer offers many benefits to consumers. This transformer provides owners with significant energy savings, as well as offering environmental benefits. Higher efficiency not only extends the life of the transformer, but also turns into cost savings for owners in the form of lower energy bills and decreased cost of ownership.
**Applications:** General purposes, industrial sites, electrical rooms, underground vaults, manufacturing facilities, steel plants, offshore, commercial, military, processing plants, electric power distribution, utilities, public locations, and more. Larson Electronics is a manufacturer and as such can build stationary and portable transformer systems to your specifications. Although we carry several models of power distribution transformer systems, we can deliver custom ordered units almost as quickly as our prebuilt units. If this model does not meet your needs, please contact us at 1-800-369-6671 or sales@larsonelectronics.com to discuss your specific requirements.


Non PCB
MINERAL OIL
NOTICE
WARNING
ADVERTENCIA
DO NOT OBSTRUCT


LARSON
MAGNETICS







# RAPO® VEGETABLE INSULATING OIL CHARACTERS

## Environmental Character

Environmental friendly

- Based on natural plants
- Almost 100% biodegradation
- Non oral toxicity
- Non toxicity for aquatic animals
- None halogen, polycyclic aromatic hydrocarbons
- Petroleum independency



Transformer oil biodegradability comparison





- If RAPO® spillover, it can be cleaned by normal means, instead of the way to deal with toxic waste.
- RAPO® is real green insulating oil which can avoid punishment by government regulations and eliminate the cleanup process.

## Less-flammable Character

Mineral oil's fire point is in the range of 147-165ºC (296.6-329ºF). The relatively lower fire point might result in transformers' fire and explosion. The fire point of RAPO® vegetable insulating oil is up to 350ºC, higher than most of fire-resistant oil and other insulating oil in use, greatly improved the safety and reliability of transformers and grid system.

Fireproof performance comparison of various types of transformer oil

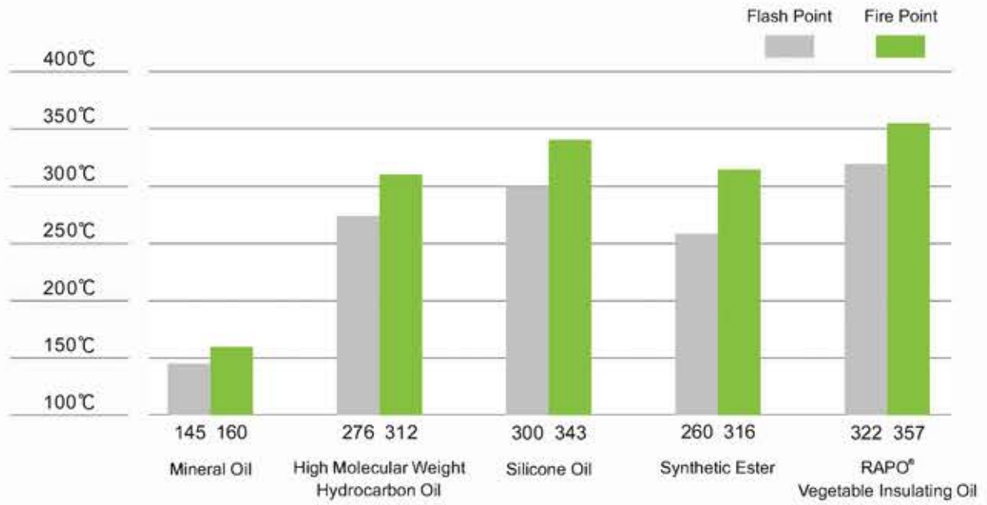



- RAPO® vegetable insulating oil can effectively save equipment maintenance, replacement and other costs, and avoid the economic losses caused by the transformer fire.
- RAPO® can be used indoors or in the compact space.
- RAPO® can help to reduce the use of fire-fighting equipment (sprinkler) and firewalls if space is limited.
- RAPO® can reduce insurance costs.

## Excellent Electrical Character


RAPO® vegetable insulating oil has a higher breakdown voltage than mineral insulating oil.

| | Dielectric Breakdown (kV) | Standards Request (kV) |
|---|---|---|
| RAPO® Vegetable Insulating Oil | 72 | ⩾35 |
| Mineral Oil (typical) | 65 | ⩾30 |

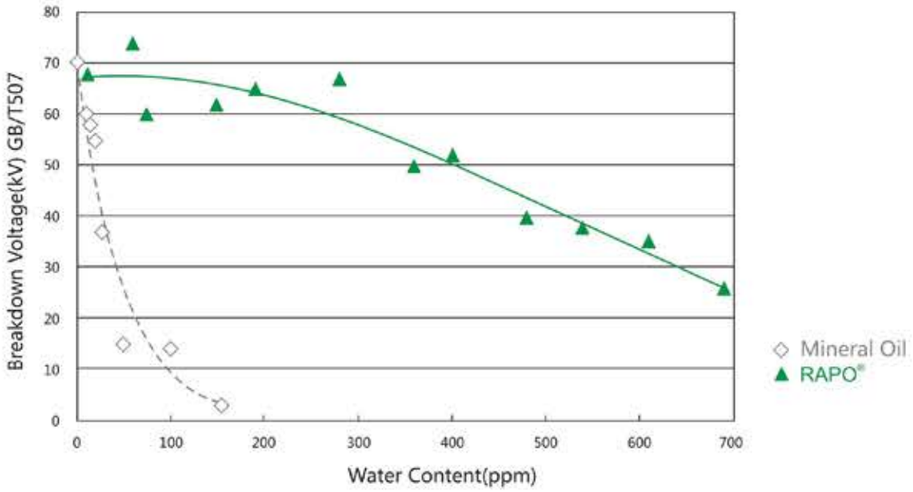



Ester chain in natural ester can make it have "polar" region, the region covered by ester chain effects like a magnetic fields which has a special attraction to water molecule and can absorb the water which exists in insulation cellulose paper material. So RAPO® has extremely high water saturation at various temperatures compared to mineral oil. Under normal operating environment, water saturation of RAPO® is 5-8 times than mineral oil.

Due to the higher water saturation of RAPO®, RAPO® vegetable insulating oil can keep the breakdown voltage to be over 60kV even if the water content exceeds over 300ppm. In contrast, the breakdown voltage decreases dramatically under 35kV when mineral oil contains a little amount of water such as 55ppm.

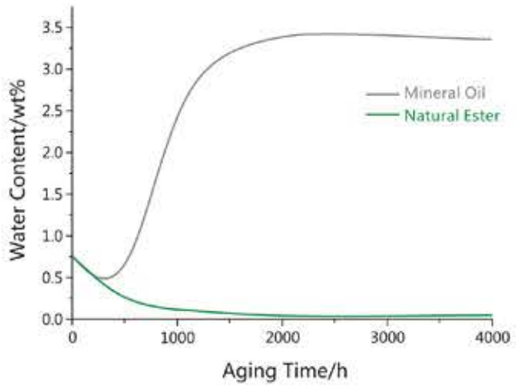


During thermal aging, RAPO® can absorb the water in insulation paper or pressboard which can accelerate the aging progress of insulation paper and pressboard. So RAPO® can prolong the insulation paper and pressboard aging process and improve the life span of the transformer.

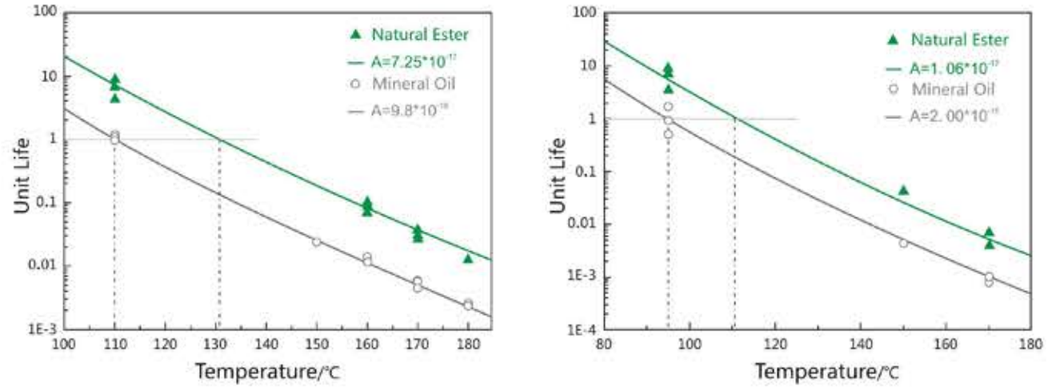


Experimental data shows that insulation paper infiltrated by RAPO® can work with a long time in the environment whose temperature is 10-15℃ higher than the maximum allowable one and has same life expectancy with the insulation paper infiltrated by mineral oil, can well prevent the production of precipitates, so that can increase the overload of the transformers. Transformers using RAPO® as filled oil can work in a long term with up to 120% load conditions and without affecting transformer's life and performance.

| Insulating Oil Type | Top Liquid Temperature Rise | Average Winding Temperature Rise | Hottest Spot Temperature |
|---|---|---|---|
| Mineral Oil | 60℃ | 65℃ | 78℃ |
| RAPO® Vegetable Insulating Oil | 80℃ | 115℃ | 160℃ |





## RAPO® VEGETABLE INSULATING OIL PARAMETERS

| Test Items | | RAPO® Insulating Oil | Test Methods | ASTM D6871 |
|---|---|---|---|---|
| Electrical Properties | | | | |
| Breakdown voltage (kV/2.5mm) | | 72 | IEC 156 | ≥35 |
| Dissipation factor (%) | 25℃ | 0.06 | ASTM D924 | ≤0.2 |
| | 100℃ | 1.37 | ASTM D924 | ≤4 |
| Volume resistivity (Ω•cm @25℃) | | $6.9\times10^{13}$ | DL/T 421 | — |
| Physical and Chemical Properties | | | | |
| Relative density ($g\cdot cm^{-3}$ @15℃) | | 0.919 | ASTM D1298 | ≤0.96 |
| Color | | L0.5 | ASTM D1500 | ≤1.0 |
| Total acid number (mgKOH/g) | | 0.024 | ASTM D974 | ≤0.06 |
| Viscosity($mm^2/s$) | 40℃ | 36.07 | GB/T 265 | ≤50 |
| | 100℃ | 8.263 | GB/T 265 | ≤15 |
| Thermal Properties | | | | |
| Flash point(open cup)/℃ | | 322 | GB/T 3536 | ≥275 |
| Fire point/℃ | | 357 | GB/T 3536 | ≥300 |
| Pour point/℃ | | -27 | GB/T 3535 | ≤-10 |

Energy saving
environmental protection
for a better world

# CERTIFICATE OF COMPLIANCE

| | |
|---|---|
| **Certificate Number** | MH63693 |
| **Report Reference** | MH63693-20200528 |
| **Issue Date** | 2020-JUNE-05 |
| **Issued to:** | GUANG DONG JOOYN NEW MATERIAL TECHNOLOGY CO.,LTD.<br>No.17, Guinan Industrial Park, Wuguishan Town<br>Zhongshan, Guangdong 528458 CHINA |
| **This certificate confirms that representative samples of** | DIELECTRIC MEDIUMS<br>Dielectric Medium, "RAPO Natural Ester". |
| | Have been investigated by UL in accordance with the Standard(s) indicated on this Certificate. |
| **Standard(s) for Safety:** | UL 340, Comparative Flammability of Liquids |
| **Additional Information:** | See the UL Online Certifications Directory at https://iq.ulprospector.com for additional information. |

This *Certificate of Compliance* does not provide authorization to apply the UL Mark. Only the UL Follow-Up Services Procedure provides authorization to apply the UL Mark.

Only those products bearing the UL Mark should be considered as being UL Certified and covered under UL's Follow-Up Services.

Look for the UL Certification Mark on the product.

Bruce Mahrenholz, Director North American Certification Program

UL LLC

Any information and documentation involving UL Mark services are provided on behalf of UL LLC (UL) or any authorized licensee of UL. For questions, please contact a local UL Customer Service Representative at http://ul.com/aboutul/locations/

# Material Safety Data Sheet

## 1、Identification of the Substance/Mixture and of the Company

### 1.1 Product Identifier

**Material Name:** RAPO® Natural Ester

**CAS No:** 68956-68-3

### 1.2 Relevant identified uses of the substance or mixture and uses advised against

**Product Use:** Dielectric coolant fluid.

**Uses advised against:** None.

### 1.3 Details of the supplier of the substance or mixture

**Company:** Guangdong JOOYN new Material Technology Co., Ltd.

**Address:** No.17 Guinan Industrial Park, Wuguishan Town, Zhongshan City

**Telephone:** 0760-88209990

**Emergency Telephone:** 0760-88206886

**Email:** zhuoyuan@jooyn.cn

## 2、Hazards Identification

This product is not classified as hazardous in accordance with Regulation (EU) No. 453/2010.

### 2.1 Classification of the substance or mixture

Regulation (EC) No 1272/2008 (CLP): Not classified.

Regulation 67/548/EEC or 1999/45/EC: Not belong to hazardous according to EC.

### 2.2 Label elements

Regulation (EC) No 1272/2008 (CLP): No symbol or signal word required.

Regulation 67/548/EEC or 1999/45/EC: No symbol or signal word required.

### 2.3 Other hazards

None.

## 3、Composition/Information on Ingredients

### 3.1 Substance

**CAS No.:** 68956-68-3.

**Description:** Mix natural triglycerides(Vegetable Oil). **Percent:** ＞98.5

## 4、First Aid Measures

### 4.1 Description of first aid measures

**Inhalation**: None envisaged due to the low vapor pressure of the substance.

**Skin**: Wash with soap and water. Obtain medical attention if irritation develops.

**Eyes**: Irrigate with copious amounts of water. Obtain medical attention if irritation develops.

**Ingestion**: Do not induce vomiting, obtain medical attention.

### 4.2 Most important symptoms and effects, both acute and delayed

No adverse effects expected.

### 4.3 Indication of any immediate medical attention and special treatment needed

No special treatment required.

## 5、Fire Fighting Measures

### 5.1 Extinguishing media

Carbon dioxide, dry powder, foam or water fog. Do not use water jets.

### 5.2 Special hazards arising from the substance or mixture

None.

### 5.3 Advice for fire fighters

Self-contained breathing apparatus may be required.

## 6、Accidental Release Measures

### 6.1 Personal precautions, protective equipment and emergency procedures

Spilt product constitutes a slip hazard. Avoid contact with skin and eyes.

### 6.2 Environmental precautions

Avoid contaminating any lakes, streams, ponds, groundwater or soil. Avoid flushing into drains. In the event of a large spillage contain product as thoroughly as possible and dispose of in accordance with local regulations.

### 6.3 Methods and material for containment and cleaning up

Soak up spilt material with absorbent granules for disposal.

## 7、Handling and Storage

### 7.1 Precautions for safe handling

Avoid eye and prolonged skin contact.

### 7.2 Conditions for safe storage

Sealed in a dry and shading environment.

### 7.3 Specific end use(s)

Exposure to air should be minimised. Opened containers should be properly resealed.

# 8、Exposure Controls/Personal Protection

### 8.1 Control Parameters

No relevant control parameters.

### 8.2 Exposure Controls

Eye washes should be available for emergency use.

**Respiratory protection**: Not required for normal use.

**Skin protection**: Wear coveralls.

**Hand protection**: Wash hands after use. For prolonged or repeated skin contact gloves are recommended.

**Eye protection**: If splashes are likely to occur wear safety glasses.

# 9、Physical and Chemical Properties

### 9.1 Information on basic physical and chemical properties

**Appearance:** Light yellow clear liquid.

**Odour: No.**

**pH:** Neutral.

**Freezing point:** -24 ℃.

**Initial boiling point and boiling range:** >300 ℃.

**Flash point:** 322 ℃ (open cup).

**Flammability (solid, gas):** Not available.

**Upper/lower flammability or explosive limits:** The maximum sample quantity 0.6% at 50℃, non-combustible and non-explosive.

**Vapor pressure:** Not available.

**Vapor density:** Not available.

**Relative density:** 0.92 $g.cm^{-3}$ at 20 ℃.

**Water solubility:** <1mg/l.

**Solubility:** Not applicable.

**Partition coefficient:** Not available.

**Auto-ignition temperature:** 406℃.

**Decomposition temperature:** Not available.

**Viscosity:** 33~36$mm^2$/s at 40 ℃.

**Explosive properties:** Non-explosive.

**Oxidizing properties:** Non-oxidizing.

### 9.2 Other information

Not applicable.

## 10 Chemical Stability and Reactivity

### 10.1 Reactivity

Stable under normal conditions of use.

### 10.2 Chemical stability

Stable under normal conditions of use.

### 10.3 Possibility of hazardous reactions

Hazardous polymerization does not occur.

### 10.4 Conditions to avoid

Temperatures >250 ℃.

### 10.5 Incompatible materials

Strong oxidizing agents.

### 10.6 Hazardous decomposition products

No data available.

# 11、Toxicological Information

**Likely routes of exposure:** Skin and eyes are the most likely routes for exposure. Accidental ingestion may occur. Inhalation is not expected to be a relevant route of exposure. The basic ingredient of this product is vegetable oil, so it is non-toxic.

**Acute oral toxicity:** None toxicity.

| Test methods | Test object | Dosage/（mg/kg） | Lethal rate/% |
|---|---|---|---|
| OECD GUIDELINE FOR TESTING OF CHEMICALS | 3 Mices | 5000 (maximum dose ) | 0 |

**Acute dermal toxicity:** None toxicity.

**Acute inhalation toxicity:** Low volatility makes inhalation unlikely.

**Skin corrosion/irritation:** No effect.

**Eye corrosion/irritation:** No effect.

**Respiratory or skin sensitisation:** No effect.

**Aspiration hazard:** Not considered an aspiration hazard.

**Carcinogenicity/mutagenicity:** Not considered a mutagenic hazard or carcinogen.

# 12、Ecological Information

When used and/or disposed of as indicated no adverse environmental effects are foreseen. Ecotoxicological effects based on knowledge of similar substances.

### 12.1 Toxicity

The substances do not pose a hazard to aquatic organisms.

| Test methods | Test object | Dosage/(mg/kg) | Lethal rate/% |
|---|---|---|---|
| OECD 203 | 10 carp/crucian | 25 （maximum solubility） | 0 |

### 12.2 Persistence and degradability

Readily biodegradable. Biodegradation degree of 20 days is 98%.

### 12.3 Bioaccumulative potential

No potential for bioaccumulation.

### 12.4 Mobility in soil

Product has low mobility in soil.

### 12.5 Results of PBT and vPvB assessment

The product does not meet criteria for toxicity which requires further assessment. It is not considered PBT or vPvB.

### 12.6 Other adverse effects

No other adverse effects envisaged.

## 13、Disposal Considerations

Waste treatment methods Product and packaging must be disposed of in accordance with local and national regulations. Unused product may be returned for reclamation.

## 14、Transport Information

Not classified as hazardous under air (ICAO/IATA), sea (IMDG), road (ADR) or rail (RID) regulations.

### 14.1 UN number

Not relevant.

### 14.2 UN proper shipping name

Not relevant.

### 14.3 Transport hazard class

Not relevant.

### 14.4 Packing group

Not relevant.

### 14.5 Environmental hazards

Not relevant.

### 14.6 Special precautions for user

Not relevant.

## 15、Regulatory Information

### 15.1 Safety, health and environmental regulations/legislation specific for the substance or mixture

The product is not regulated to Registration, Evaluation, Authorization and Restriction (REACH) of chemicals in the European Union.

### 15.2 Chemical safety assessment

A chemical safety assessment has been performed for this substance.

## 16、Other Information

Compiled according to regulation 1907/EC/2006.

### 16.1 Changes from last issue

Not obvious change.

# Certification

Manufacturer: Larson Electronics LLC
Address: 9419 US-HWY 175
Kemp, Texas 75143

**Declare the following equipment conforms to the standard(s) as listed:**

Model: MT-PML & MT-UPM Series
Description: Overhead & Pad Mounted Distribution Transformers

The MT-PML & MT-UPM series complies with the below standards set forth by the listed Association's requirements. Purchased and manufactured components are evaluated to Larson Electronics LLC Quality Control Management system per ISO 9001:2015. This certification applies to all specimens manufactured in accordance to the manufacture's drawings and options configured per the specification data sheet.

**Evaluated Standards:**

- **ASTM A240/A240M (2020a):** Standard Specification for Chromium and Chromium-Nickel Stainless Steel Plate, Sheet, and Strip for Pressure Vessels and for General Applications
- **ASTM D117 (2018)**: Standard Guide for Sampling, Test Methods, and Specifications for Electrical Insulating Liquids
- **ASTM D1535 (2014; R2018):** Standard Practice for Specifying Color by the Munsell System
- **ASTM D3487 (2016; E2017):** Standard Specification for Mineral Insulating Oil Used in Electrical Apparatus
- **ASTM D6871 (2017):** Standard Specification for Natural (Vegetable Oil) Ester Fluids Used in Electrical Apparatus
- **ASTM D877/D877M (2019):** Standard Test Method for Dielectric Breakdown Voltage of Insulating Liquids Using Disk Electrodes
- **ASTM D92 (2012a):** Standard Test Method for Flash and Fire Points by Cleveland Open Cup Tester
- **ASTM D97 (2017b):** Standard Test Method for Pour Point of Petroleum Products
- **D4059-00 (2018):** Standard Specifications for Analysis of Polychlorinated Biphenyls in Mineral Insulating Oils By Gas Chromatography.
- **EPA 712-C-98-075 (1998):** Fate, Transport and Transformation Test Guidelines - OPPTS 835.3100- "Aerobic Aquatic Biodegradation"
- **EPA 821-R-02-012 (2002):** Methods for Measuring the Acute Toxicity of Effluents and Receiving Waters to Freshwater and Marine Organisms


LARSON ELECTRONICS LLC • 9419 E US HWY 175 • KEMP, TX 75143
p: 1-800-369-6671 • intl: 903-498-3363 • f: 903-498-3364 • sales@larsonelectronics.com

- **ANSI / IEEE C2:** National Electric Safety Code
- **ANSI / IEEE C12.1 (2014; E2016)**: Electric Meters - Code for Electricity Metering
- **ANSI / IEEE C12.10 (2011):** Physical Aspects of Watthour Meters - Safety Standards
- **ANSI / IEEE C12.7 (2014):** Requirements for Watthour Meter Sockets
- **ANSI / IEEE C57.106-1991 (R1998):** Guide for Acceptance and Maintenance of Insulating Oil in Equipment.
- **ANSI / IEEE C2 (2017; E2017; INT 2017):** National Electrical Safety Code
  **ANSI / IEEE C37.47 (2011):** Standard for High Voltage Distribution Class Current-Limiting Type Fuses and Fuse Disconnecting Switches
- **ANSI / IEEE C57.12.00 (2015):** General Requirements for Liquid-Immersed Distribution, Power, and Regulating Transformers
- **ANSI / IEEE C57.12.20 (2017):** Overhead-Type Distribution Transformers 500 kVA and Smaller; High Voltage, 34 500 V and Below; Low Voltage, 7970/13 800Y V and Below
- **ANSI / IEEE C57.12.21 (2000):** Pad-Mounted, Compartmental-Type, Self-Cooled, Single-Phase Distribution Transformers With High-Voltage Bushings: High Voltage (34 500 GrdY/19 920 V and Below) and Low Voltage (240/120 V, 167 kVA and Smaller)
- **ANSI / IEEE C57.12.25 (1990):** Requirements for Pad-Mounted Compartmental-Type Single-Phase Distribution Transformers with Separable Insulated High-Voltage Connectors, High-Voltage, 34500 Grd. Y/19920 Volts and Below; Low Voltage, 240/120; 167 KVA and Smaller.
- **ANSI / IEEE C57.12.28 (2014):** Standard for Pad-Mounted Equipment - Enclosure Integrity
- **ANSI / IEEE C57.12.29 (2014):** Standard for Pad-Mounted Equipment - Enclosure Integrity for Coastal Environments
- **ANSI / IEEE C57.12.31 (2010):** Standard for Pole-Mounted Equipment - Enclosure Integrity
- **ANSI / IEEE C57.12.34 (2015):** Standard Requirements for Pad-Mounted, Compartmental-Type, Self-Cooled, Three-Phase Distribution Transformers, 10 MVA and Smaller; High Voltage, 34.5 kV Nominal System Voltage and Below; Low Voltage, 15 kV Nominal System Voltage and Below
- **ANSI / IEEE C57.12.35 (2013):** Standard Bar Coding for Distribution Transformers and Step-Voltage Regulators
- **ANSI / IEEE C57.12.38 (2014):** Standard for Pad-Mounted-Type, Self-Cooled, Single-Phase Distribution Transformers; High Voltage, 34 500 GrdY/19 920 V and Below, Low Voltage, 240/120 V; 167 kVA and Smaller
- **ANSI / IEEE C57.12.70 (2020):** Terminal Markings And Connections For Distribution And Power Transformers
- **ANSI / IEEE C57.12.80 (2010):** Standard Terminology for Power and Distribution Transformers
- **ANSI / IEEE C57.12.90 (2015; C2017):** Test Code for Liquid-Immersed Distribution, Power, and Regulating Transformers
- **ANSI / IEEE C57.12.110 (2018):** Recommended Practice for Establishing Liquid Immersed and Dry-Type Power and Distribution Transformer Capability when Supplying Nonsinusoidal Load Currents
- **ANSI / IEEE C57.13 (2016):** Requirements for Instrument Transformers
- **ANSI / IEEE C57.91 (2011):** Guide for Loading Mineral-Oil-Immersed Transformers
- **ANSI / IEEE C57.98 (2011):** Guide for Transformer Impulse Tests
- **ANSI / IEEE C57.106 (2015):** Guide for Acceptance and Maintenance of Insulating Oil in Equipment
- **ANSI / IEEE C57.109 (2018):** Guide for Liquid-Immersed Transformer Through-Fault-Current Duration
- **ANSI / IEEE C57.147 (2018):** Guide for Acceptance and Maintenance of Natural Ester Fluids in Transformers
- **ANSI / IEEE C57.154 (2012):** Standard for the Design, Testing, and Application of Liquid-Immersed Distribution, Power, and Regulating Transformers Using High-Temperature Insulation Systems and Operating at Elevated Temperatures
- **ANSI / IEEE C62.11 (2020):** Standard for Metal-Oxide Surge Arresters for Alternating Current Power Circuits (>1kV)



LARSON ELECTRONICS LLC • 9419 E US HWY 175 • KEMP, TX 75143
p: 1-800-369-6671 • intl: 903-498-3363 • f: 903-498-3364 • sales@larsonelectronics.com

- **ANSI / IEEE C62.22 (2009):** Guide For The Application Of Metal-Oxide Surge Arresters For Alternating-Current Systems
- **ANSI / IEEE 386 (2016):** Separable Insulated Connector Systems for Power Distribution Systems Rated 2.5 kV through 35 kV
- **CSA C2.1:06 (R2022):** Standard for Single-phase and three-phase liquid-filled distribution transformers
- **CAN / CSA C50-14 (R2018):** Mineral insulating oil, electrical, for transformers and switches
- **CSA C88:1 (R2018):** Power Transformer And Reactor Bushings
- **CSA C88:16 (R2021):** Power transformers and reactors
- **CSA C227.1:** Single Phase Pad Mounted Distribution Transformers
- **CAN / CSA C227.2:** Three-Phase, Live-Front, Pad-Mounted Distribution Transformers
- **CSA C227.3:06 (R2022):** Low-profile, single-phase, pad-mounted distribution transformers with separable insulated high-voltage connectors
- **CSA C227.4 (R2021):** Three-phase, pad-mounted distribution transformers with separable insulated high-voltage connectors
- **CSA C227.5-08 (R2018):** Three-Phase Live-Front Pad-Mounted Distribution Transformers
- **CSA C301.2:06 (R2022):** Standard for Three-phase submersible distribution transformers
- **CAN / CSA C802.1-13 (R2018):** Minimum efficiency values for liquid-filled distribution transformers
- **CSA C802.3-15 (R2020):** Minimum efficiency values for power transformers
- **NARA 10 CFR Part 431:** Energy Efficiency Program for Certain Commercial and Industrial Equipment
- **NEMA 260-1996 (R2019):** Safety Labels For Pad-Mounted Switchgear And Transformers Sited In Public Areas
- **NEMA C12.10 (2011):** Physical Aspects of Watthour Meters - Safety Standards
- **ANSI / NEMA Z535 (2011):** Safety color chart
- **ANSI / NEMA Z535.1 (2022):** Safety colors
- **ANSI / NEMA Z535.2 (2011):** Environmental and facility safety signs
- **ANSI / NEMA Z535.3 (2022):** Criteria for safety symbols
- **ANSI / NEMA Z535.4 (2011, R2017):** Product safety signs and labels
- **ANSI / NEMA Z535.5 (2022):** Safety tags and barricade tapes (for temporary hazards)
- **ANSI / NEMA Z535.6 (2011, R2017):** Product safety information in product manuals, instructions, and other collateral materials
- **NETA ATS (2021):** Standard for Acceptance Testing Specifications for Electrical Power Equipment and Systems
- **TR-1 (2013):** Transformers, Regulators and Reactors

Signed for and on behalf of: Larson Electronics, LLC
Place of issue: Kemp, TX

Signature: James Thomas

Name: James Thomas
Position: Operations Manager


LARSON ELECTRONICS LLC • 9419 E US HWY 175 • KEMP, TX 75143
p: 1-800-369-6671 • intl: 903-498-3363 • f: 903-498-3364 • sales@larsonelectronics.com

# Concrete Pad Construction Details

## MT-PML-RX-3P-XX-R1 Series

## Three Phase Pad Mounted Transformers

### Purpose and Scope

This document shows construction details for concrete pads for three-phase, pad-mounted transformers.

### General Information

1. When a pad is installed by the customer, that customer shall provide all materials. In areas of known unusually soft soil conditions, AHJ may require special treatment. Before pouring or setting the pad, the customer or contractor may be required to request an inspection by AHJ to approve the installation. AHJ shall determine the acceptability of each pad installation.

2. The installation of the pad includes the two ground rods and the interconnecting ground wire.

### Application

3. If a pad-mounted transformer cannot be located away from vehicular traffic, the customer shall provide suitable barriers for the protection of the transformer. AHJ shall determine the protection requirements.

4. If the customer is to use bus duct, the secondary opening is not needed. Grout in the window of precast pads.

5. The pad sizes are based on maximum dimensions, including cooling radiators, of the various configured transformers.

### Construction Notes

6. In general, all equipment pads should be installed as level as practical. Pads supporting oil-filled equipment must be leveled to within 1 inch in 8 feet in all directions.

7. In general, all equipment pads should be installed as level as practical. Pads supporting oil-filled equipment must be leveled to within 1 inch in 8 feet in all directions.

8. An equipment pad SHALL NOT be placed on an elevated berm, mound or structure either earthen or otherwise when placed in a Flood Plain. If local knowledge of the area in which the equipment is to be placed identifies a high likelihood that uninsulated terminals of the equipment will come in contact with floodwater and the location cannot be moved to a location less likely to have flood levels come in contact with the exposed terminals, a Subsurface Fully Insulated Device should be installed in lieu of the pad mount design. In some cases such as transformers, because of capacity limits of subsurface material coded equipment it may not be possible to provide a transformer of sufficient capacity to seNe loads in excess of the capabilities of a 1000 kVA UCO.

9. The transformer pad shall be placed on firm, compacted native material or on engineered fill which has been compacted at least to the requirements this document

10. The area under the pad shall be excavated to the required grade, or to a depth necessary to reach firm, undisturbed material, whichever is deeper. The material can be considered firm if it cannot be penetrated by thumb except with moderate effort.

11. If firm material has not been reached within a depth of 3 feet, excavate 3 feet beyond the perimeter of the pad and backfill the entire excavated area to the required grade and to the requirements of Note 12.

12. In case it has been necessary to excavate deeper than the required grade to reach firm material, backfill to the required grade in one of the following ways:

A. Backfill with clean, non-expansive soil compacted to 90% of maximum density. Soil shall be placed in layers not more than 8 inches thick before compaction. Maximum density and in-place density is to be determined by by ASTM D-1556 and ASTM D-1557 respectively. A copy of the test results may be required by AHJ.

B. Backfill with soil-cement slurry consisting of one sack of Portland cement per cubic yard and clean native soil or sand. When slurry is used as a backfill material, the customer will not be required to use a poured-in-place pad.

13. In areas of known soft soil conditions, trenches within the pad excavation area for the installation of conduits shall be backfilled in one of the ways specified in Note 12.

14. In addition to the above, precast pads shall be placed on a 3-inch layer of slurry backfill or sand screeded level to provide uniform bearing.

15. Conduit windows shall be grouted with non-shrink grout (asphalt or blacktop is not approved for grouting).

16. Concrete shall be designed to attain a strength of 2,500 pounds per square inch (psi) at 28 days. Slump for concrete placement shall not exceed 3 inches. Reinforcing steel shall be per ASTM A615, Grade 40 minimum.

17. A minimum distance of 6 feet shall be maintained between ground rods.

18. Wood-float or light broom finish the top of the slab. Finish all exposed edges with a finishing tool. Vertical edges shall have a 3/4-inch chamfer. Slope exposed horizontal surfaces slightly for drainage. Moist-cure concrete for at least 7 days after pouring. Do not install transformer until 14 days after pouring concrete. See Note 19 for exceptions to this requirement.

19. The transformer may be installed earlier than the 14 days specified above, provided the concrete has attained a compressive strength of at least 1,500 psi obtained as follows (this procedure is permitted only for urgent cases where earlier pouring of pad is not practical):

A. For a six-sack mix using normal Portland cement, the transformer may be installed after 7 days; or for a six-sack mix using high early-strength cement, the transformer may be installed after 72 hours.

B. All concrete must be moist-cured to the minimum period specified above before installing the transformer.

C. Verify the required strength by either concrete cylinder test or Schmidt hammer test.

20. Belled ends of conduits should be placed approximately 1 inch above the concrete pad surface. If belled ends are removed, install end bell fittings. Temporarily plug or cap all conduits.

21. Only AHJ-approved utility electric-service-related equipment and structures may be installed in the area beneath the transformer pad. The area 6 feet deep and 12 inches horizontally around the pad shall be free of all foreign substructures.

**Construction Notes for Precast Pads**

22. Concrete shall be designed to attain a strength of 2,500 psi in 28 days.

23. Inserts and securing of inserts shall be of sufficient strength to lift the pad. A minimum of three inserts with 7/8- inch diameter, UNC thread and 2-1/4 inch inside depth, steel, galvanized with temporary plugs shall be provided.

24. Inserts shall be installed flush with the surface of the pad.

25. Reinforcing bars shall be as per ASTM A615, Grade 40 minimum.

26. 24. All exposed edges shall have a 3/4-inch chamfer or radius.

27. Surface shall have a light broom or wood-float finish.

28. The surface of the pad shall be level and flat.


29. Precast pads shall be permanently identified with manufacturer's name and have the weight stenciled on top of the pad.


**Concrete Pad Construction Details**

**MT-PML-RX-3P-XX-R1 Series**


**Three Phase Pad Mounted Transformers**

## Concrete Pad Details for Three Phase Transformers

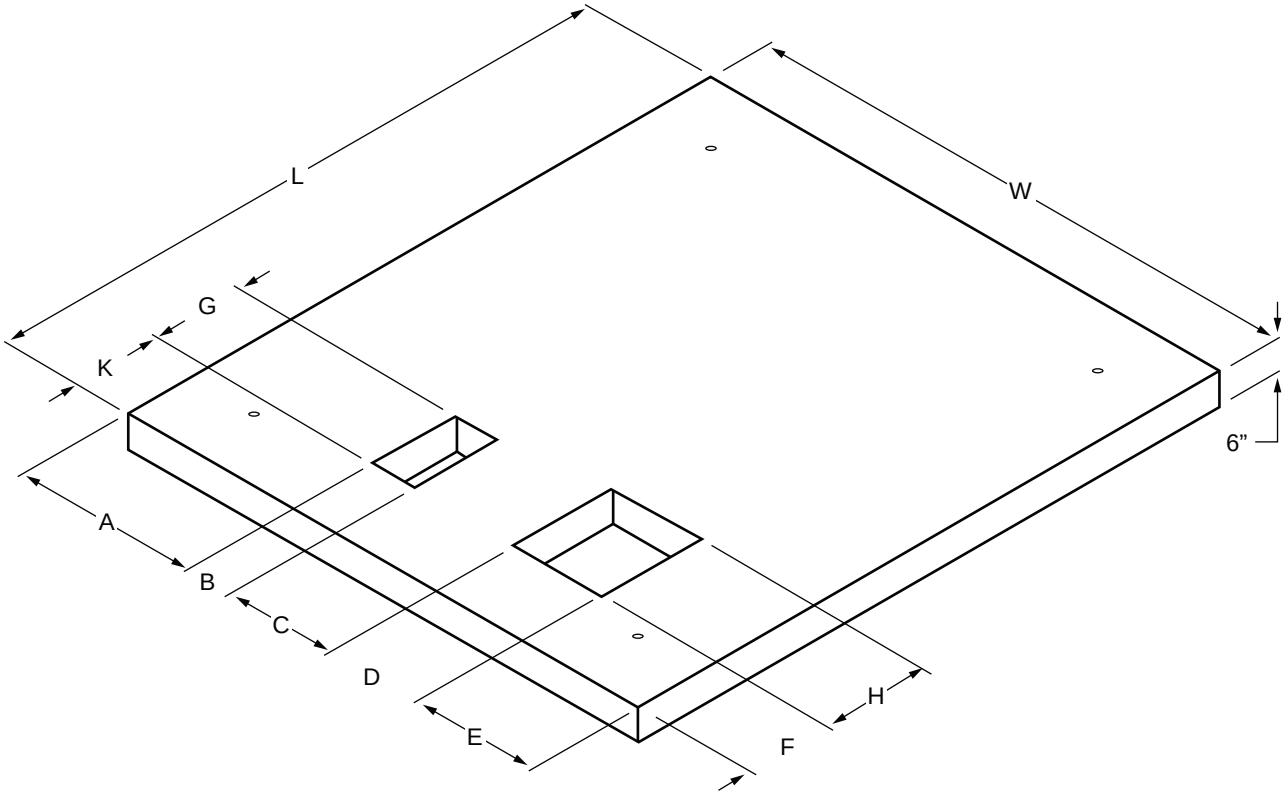

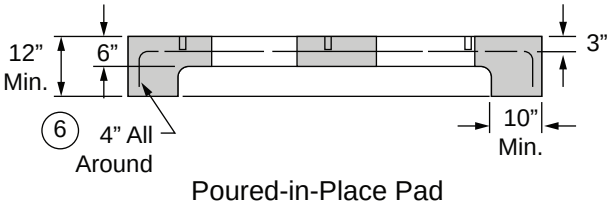
Poured-in-Place Pad

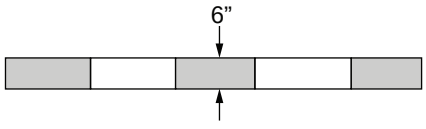


Precast Pad

| KVA SIZE | MAX WEIGHT (LBS) | A | B | C | D | E | F | G | H | K | L | W |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 75 | 2,375 | 17” | 16” | 15” | 19” | 13” | 10” | 8” | 17” | 14” | 61” | 80” |
| 112.50 | | | | | | | | | | | | |
| 150 | | | | | | | | | | | | |
| 225 | | | | | | | | | | | | |
| 300 | 4,830 | 22” | 16” | 15” | 20” | 17” | 20” | 8” | 19” | 26” | 106” | 90” |
| 500 | | | | | | | | | | | | |
| 750 | | | | | | | | | | | | |
| 1,000 | | | | | | | | | | | | |
| 1,500 | | | | | | | | | | | | |
| 2,000 | | | | | | | | | | | | |
| 2,500 | | | | | | | | | | | | |

# Certification

Manufacturer: Larson Electronics LLC
Address: 9419 US-HWY 175
Kemp, Texas 75143

**Declare the following equipment conforms to the standard(s) as listed:**

Model: MT-PML & MT-UPM Series
Description: Overhead & Pad Mounted Distribution Transformers

The MT-PML & MT-UPM series complies with the below standards set forth by the listed Association's requirements. Purchased and manufactured components are evaluated to Larson Electronics LLC Quality Control Management system per ISO 9001:2015. This certification applies to all specimens manufactured in accordance to the manufacture's drawings and options configured per the specification data sheet.

**Evaluated Standards:**

- **ANSI C12.1 (2014; E2016)**: Electric Meters - Code for Electricity Metering
- **ANSI C12.10 (2011):** Physical Aspects of Watthour Meters - Safety Standards
- **ANSI C12.7 (2014):** Requirements for Watthour Meter Sockets
- **ASTM A240/A240M (2020a):** Standard Specification for Chromium and Chromium-Nickel Stainless Steel Plate, Sheet, and Strip for Pressure Vessels and for General Applications
- **ASTM D117 (2018)**: Standard Guide for Sampling, Test Methods, and Specifications for Electrical Insulating Liquids
- **ASTM D1535 (2014; R2018):** Standard Practice for Specifying Color by the Munsell System
- **ASTM D3487 (2016; E2017):** Standard Specification for Mineral Insulating Oil Used in Electrical Apparatus
- **ASTM D6871 (2017):** Standard Specification for Natural (Vegetable Oil) Ester Fluids Used in Electrical Apparatus
- **ASTM D877/D877M (2019):** Standard Test Method for Dielectric Breakdown Voltage of Insulating Liquids Using Disk Electrodes
- **ASTM D92 (2012a):** Standard Test Method for Flash and Fire Points by Cleveland Open Cup Tester
- **ASTM D97 (2017b):** Standard Test Method for Pour Point of Petroleum Products
- **D4059-00 (2018):** Standard Specifications for Analysis of Polychlorinated Biphenyls in Mineral Insulating Oils By Gas Chromatography.
- **EPA 712-C-98-075 (1998):** Fate, Transport and Transformation Test Guidelines - OPPTS 835.3100- "Aerobic Aquatic Biodegradation"
- **EPA 821-R-02-012 (2002):** Methods for Measuring the Acute Toxicity of Effluents and Receiving Waters to Freshwater and Marine Organisms
- **IEEE C57.106-1991 (R1998):** Guide for Acceptance and Maintenance of Insulating Oil in Equipment.
- **IEEE 386 (2016):** Separable Insulated Connector Systems for Power Distribution Systems Rated 2.5 kV through 35 kV
- **IEEE C2 (2017; E2017; INT 2017):** National Electrical Safety Code


LARSON ELECTRONICS LLC • 9419 E US HWY 175 • KEMP, TX 75143
p: 1-800-369-6671 • intl: 903-498-3363 • f: 903-498-3364 • sales@larsonelectronics.com

- **IEEE C37.47 (2011):** Standard for High Voltage Distribution Class Current-Limiting Type Fuses and Fuse Disconnecting Switches
- **IEEE C57.12.00 (2015):** General Requirements for Liquid-Immersed Distribution, Power, and Regulating Transformers
- **IEEE C57.12.25 (1990):** Requirements for Pad-Mounted Compartmental-Type Single-Phase Distribution Transformers with Separable Insulated High-Voltage Connectors, High-Voltage, 34500 Grd. Y/19920 Volts and Below; Low Voltage, 240/120; 167 KVA and Smaller.
- **IEEE C57.12.28 (2014):** Standard for Pad-Mounted Equipment - Enclosure Integrity
- **IEEE C57.12.29 (2014):** Standard for Pad-Mounted Equipment - Enclosure Integrity for Coastal Environments
- **IEEE C57.12.34 (2015):** Standard Requirements for Pad-Mounted, Compartmental-Type, Self-Cooled, Three-Phase Distribution Transformers, 10 MVA and Smaller; High Voltage, 34.5 kV Nominal System Voltage and Below; Low Voltage, 15 kV Nominal System Voltage and Below
- **IEEE C57.12.38 (2014):** Standard for Pad-Mounted-Type, Self-Cooled, Single-Phase Distribution Transformers; High Voltage, 34 500 GrdY/19 920 V and Below, Low Voltage, 240/120 V; 167 kVA and Smaller
- **IEEE C57.12.70 (2020):** Terminal Markings And Connections For Distribution And Power Transformers
- **IEEE C57.12.80 (2010):** Standard Terminology for Power and Distribution Transformers
- **IEEE C57.12.90 (2015; C2017):** Test Code for Liquid-Immersed Distribution, Power, and Regulating Transformers
- **IEEE C57.13 (2016):** Requirements for Instrument Transformers
- **IEEE C57.91 (2011):** Guide for Loading Mineral-Oil-Immersed Transformers
- **IEEE C57.98 (2011):** Guide for Transformer Impulse Tests
- **IEEE C57.106 (2015):** Guide for Acceptance and Maintenance of Insulating Oil in Equipment
- **IEEE C57.109 (2018):** Guide for Liquid-Immersed Transformer Through-Fault-Current Duration
- **IEEE C57.147 (2018):** Guide for Acceptance and Maintenance of Natural Ester Fluids in Transformers
- **IEEE C57.154 (2012):** Standard for the Design, Testing, and Application of Liquid-Immersed Distribution, Power, and Regulating Transformers Using High-Temperature Insulation Systems and Operating at Elevated Temperatures
- **IEEE C62.11 (2020):** Standard for Metal-Oxide Surge Arresters for Alternating Current Power Circuits (>1kV)
- **NARA 10 CFR 431:** Energy Efficiency Program for Certain Commercial and Industrial Equipment
- NEMA 260 (1996; R2004): Safety Labels for Pad-Mounted Switchgear and Transformers Sited in Public Areas
- **NEMA C12.10 (2011):** Physical Aspects of Watthour Meters - Safety Standards
- **NEMA Z535.4 (2011; R2017):** Product Safety Signs and Labels
- **TR-1 (2013):** Transformers, Regulators and Reactors
- **NETA ATS (2021):** Standard for Acceptance Testing Specifications for Electrical Power Equipment and Systems

Signed for and on behalf of: Larson Electronics, LLC
Place of issue: Kemp, TX

Signature: James Thomas

Name: James Thomas
Position: Operations Manager



LARSON ELECTRONICS LLC • 9419 E US HWY 175 • KEMP, TX 75143
p: 1-800-369-6671 • intl: 903-498-3363 • f: 903-498-3364 • sales@larsonelectronics.com

# Certification

Manufacturer: Larson Electronics LLC
Address: 9419 US-HWY 175
Kemp, Texas 75143

**Declare the following equipment conforms to the standard(s) as listed:**

Model: MT-PML, MT-UPM
Description: Liquid Filled Distribution Transformers

**Evaluated Listings:**

**FCC:** Radio Frequency Emission & Authorization Status

The MT-PML and MT-UPM Series of industrial liquid filled power distribution transformers complies with Federal Communications Commission requirements for Radio Frequency Emission & Authorization Status. This product is not capable of emitting rf energy and does not require FCC authorization. This certification applies to all specimens manufactured in accordance to the manufacture's drawings.

Signed for and on behalf of: Larson Electronics, LLC
Place of issue: Kemp, TX

Signature: James Thomas

Name: James Thomas
Position: Operations Manager



LARSON ELECTRONICS LLC • 9419 E US HWY 175 • KEMP, TX 75143
p: 1-800-369-6671 • intl: 903-498-3363 • f: 903-498-3364 • sales@larsonelectronics.com

# Frequently Asked Questions (FAQ)

**Q. What type of transformers does Larson Electronics offer?**

A. Larson Electronics offered dry type transformers and liquid filled transformers. For liquid filled transformers, Larson Electronics' offers overhead distribution transformers (utility pole mount), pad mounted distribution transformers (mounts to a concrete pad), pad mounted power transformers, underground submersible distribution transformers, and substation transformers.

**Q. What are the main benefits of a liquid filled transformer?**

A. Liquid filled transformers have higher energy efficiency, durability, short circuit strength, low sound level, lower maintenance costs, and longer useful life expectancy compared to dry type transformers.

**Q. What types of transformer liquids does Larson Electronics use?**

A. Larson Electronics offered mineral oil fluid (ONAN) and biodegradable fluid (KNAN). On request we can provide brand name FR3 fluid or other brand name fluids for additional cost and lead time. All fluids offered by Larson Electronics are non-PCB containing fluids.

**Q. What is the difference between mineral oil (ONAN) and biodegradable fluid (KNAN)?**

A. Mineral oil has a flash point of 147-165°C. Biodegradable insulation fluids have a higher flash point up to 350°C. Using biodegradable fluids reduce the risk of potential fire due to the transformer overheating. Utilizing biodegradable fluids extends the lifespan on the transformer due to better insulation, higher flash point, better moisture resistance, and higher maximum voltage breakdown points over mineral oils.

**Q. What is the difference between FR3 fluid and biodegradable fluid?**

A. Envirotemp FR3 is a brand name of biodegradable ester oils made by Cargill. Cargill is not the only manufacturer of biodegradable ester fluids used for cooling liquid filled transformers. Larson Electronics stocks RAPO biodegradable fluid that exceeds testing for ASTM D6871. Cargill Envirotemp FR3 can be used in substitution of the standard biodegradable fluid. This substitution will increase cost and lead times.

**Q. Do Larson Electronics transformers contain PCB?**

A. All dry-type and liquid filled transformers manufactured by Larson Electronics are PCB (polychlorinated biphenyl) free at the time of shipment. Mixtures of polychlorinated biphenyls (PCB's) were banned commercially for use as transformers cooling fluids in 1977 due to being toxic, bio-accumulative, not at all biodegradable, and difficult to dispose of safely. None of Larson

Electronics transformers contain PCB and only use PCB-free fluids.

**Q. What are the transformer ratings?**

A. IEEE Std C57.12.20 (Overhead Type), IEEE Std C57.12.34 (Three-Phase Pad-Mounted Compartmental), IEEE Std C57.12.38 (Single-Phase Pad-Mounted), IEEE Std C57.12.36 (Distribution Substation Transformers). For more detailed list of standards, please see the ASTM Certificate 1 link.

**Q. Is this transformer UL Listed? Is this transformer CSA Listed?**

A. By default, no. The majority of medium voltage transformer installations do not require certification by a Nationally Recognized Testing Laboratory (NRTL) unless being installed inside a building. Medium voltage equipment is built to and complies to ANSI, ASTM, DOE, IEEE, and NETA standards. UL is one of multiple NRTLs per OSHA certification for testing facilities for USA standards. CSA is one of multiple NRTLs per Canada certification standards. For an additional fee, we can submit your order for NRTL testing after completion of build. This testing service is per order, requires payment of testing fees, and will increase lead time.

**Q. What is the lifespan of a transformer?**

A. The average lifespan of a liquid filled transformer is 25 years. Many transformers will survive past the 25 year mark and are still in service for up to 35 years.

**Q. What is the difference between Loop Feed and Radial Feed?**

A. Radial feed Transformers will have three high voltage bushings (H1, H2, and H3). There is one bushing for each phase to allow for the incoming high voltage cables. On Wye and Grounded Wye connected Transformers, there will also be an H0 bushing. Loop feed Transformers will have six high voltage bushings (H1A, H2A, H3A, H1B, H2B, and H3B). There are two bushings for each phase. This allows the customer to connect all of their Transformers in a loop configuration. It will also allow the customer to bring two feeds to the Transformer. A four position switch can be used to switch between the A feed and the B feed.

**Q. What is the difference between Dead Front and Live Front?**

A. Live-front: The voltage-carrying parts are exposed. Live-front terminations have high voltage connectors, arresters, or fuses are exposed to the operator after cabinet has been opened. Dead-front: Often referred to as dead-front bushings. Safety is enhanced as there are no current-carrying parts exposed to the operator. For overhead distribution transformers and underground submersible transformers, live front is common. For pad mount transformers, the primary is typically dead front and the secondary is live front. Protection barriers can be added to live front pad mounted transformers

**Q. What is the difference between copper and aluminum windings inside the transformer?**

A. Transformers wound with aluminum or copper wire have similar losses and performance. The choice of using copper or aluminum windings depends upon the application and the individual preferences. The type of winding material does not affect the transformer's reliability. A transformer's life is defined by the life of its insulation system.

**Q. How many BTU's of heat does a transformer generate?**

A. The heat a transformer generates is dependent upon the transformer losses. To determine air conditioning requirements multiply the sum of the full load losses (obtained from factory or test report) of all transformers in the room by 3.41 to obtain the BTUs/hour. For example: A transformer with losses of 2000 watts will generate 6820 BTUs/hour.

**Q. Do you have to ground this transformer?**

A. In most cases the enclosure of the transformer is grounded for safety reasons. However, a transformer will function properly without being grounded. Be sure to research all grounding requirements for your specific application against the NETA and NEC as well as any local electrical codes.

**Q. I plan to utilize this transformer for a solar or green energy related project to back feed the grid, can this unit be reverse fed for providing electric back to the utility grid?**

A. We offer a line of transformers for step up / step down operation that is designed for solar and renewable energy applications. Larson Electronics utilizes a R designation of R3 and R4 for these applications. Our standard R2 and R7 models are not designed for step up operation for reverse feeding and should not be utilized for these applications.

**Q. What types of transformer protection are available?**

A. For over-current protection, Larson Electronics offers Fuses, breakers and interrupters. For over-voltage protection, Larson Electronics offers arresters. Larson Electronics can provide both Primary and Secondary protection equipment.

**Q. What primary connectors are included with this transformer?**

A. We offer elbow connectors standard for dead front primary transformers. 200-amp load break well bushings with inserts and elbows are standard up to 500 KVA. 600-amp dead break integral bushings and elbows are standard for 500 KVA through 3750 KVA. 900 amp dead break integral bushings and elbows are standard for units above 3750 KVA. We can change the standard bushing to a higher or lower amperage upon request providing the primary amperage does not exceed the amperage rating of the bushing.

**Q. Are primary eblows included with purchase?**

A. Primary mating elbows that match the bushings the transformer is configured with are included with purchase for standard units.

**Q. What type of surge arrestors are included?**

A. Elbow surge arrestors are included with standard builds if specified that surge arrestors are included (check specifications). Wall mounted surge arrestors can be configured upon request.

**Q. What secondary connectors are included?**

A. NEMA spade connectors are included standard for live front secondary connections, and eblow connectors are included standard for dead front secondary connections. The specific hole quantity and hole spacing are referenced on preliminary drawings and in the specifications.

**Q. What accessories are included?**

A. Temperature gauge, oil level gauge, pressure/vacuum gauge, tap changer, load break switch, surge arrestors, fill plug, and drain plug are included standard. Gauges can be offered with auxiliary dry form contacts on request. Please review specifications for all accessories included with this specific unit.

**Q. What is required for mounting this transformer?**

A. For mounting requirements, please see the Concrete Pad document hyperlinked on the spec sheet and seen on the product page.

**Q. Does my primary and secondary voltage matter for a transformer?**

A. Yes, this matters greatly. For primary voltage, most transformers will be equipped with a tap changer for small primary voltage changes due to voltage drop for losses experienced in the transmission line. Some transformers will be equipped with dual voltage primaries with a voltage selector switch to choose which voltage to operate the transformer on. In both cases, these are designed to provide a steady output voltage. It is very important to confirm what voltage your primary voltage being delivered from the utility provider and what the required electrical voltage for the building or house is. You cannot only provide the KVA size, or the abbreviated primary voltage as there is not standardized voltage across the country and each region can be different. Once manufacturing has started, these cannot be changed.

**Q. Where is the detailed dimensional drawing for this unit?**

A. We can provide a feature drawing that shows accessories and estimated form factor. Due to the variety of options and varying voltages, an exact dimensional drawing for the specific unit you have ordered is not available until after purchase and engineering has completed the drawing for your sales order. We do not offer completed detailed engineered drawings before purchase. The feature drawings are detailed enough for concrete pad designs and preliminary engineering site designs.

**Q. What is the warranty of this transformer?**

A. 12 months from point of connecting electrical service to the transformer or 18 months from point of ordering, whichever comes first.

**Q. Can this transformer be customized?**

A. Yes, Larson Electronics allows for customization of all transformers. Please send customization requests to sales@larsonelectronics.com. If you have an engineered specification or engineered drawings, please provide those at the time of request.

**Q. What materials do you offer?**

A. We offer coated steel and stainless steel tank and housing materials. Stainless steel options include 429 stainless and 304 stainless. For winding materials we offer aluminum and copper conductors.

**Q. What standard colors do you offer?**

A. Our standard build finish color for pad mounted transformers is Munsell™ 7GY 3.29/1.5 Pad-Mount Green. We do have other standard finishes available on request, including: Munsell™ 9GY 1.5/2.6 Canadian Green, Munsell™ 5BG 7.0/0.4 Light Grey (ANSI #70), Grey (ANSI #61), Munsell™ 10bg 6/1 Blue Grey, Munsell™ 10bg 6/1 Steel Blue, Munsell™ N 9/ Safety White, Federal Standard Desert Tan FS595B-33446, Federal Standard Eagle Feather Tan FS-595-23578, and Federal Standard Tobacco Brown FS595C-30108. If you need a color not listed here, please contact us.

**Q. What labeling is on the transformer?**

A. Standard labeling includes external stenciling of the KVA, stenciling of high and low voltages, non-PCB sticker, "Mr. Ouchy" warning label, and stainless steel riveted nameplate. Additional labeling to your specifications can be provided at request.

**Q. Does this transformer comply with (insert utility provider) specifications?**

A. Larson Electronics utilitizes a dedicated R designation in the part number for specific build designs. R1-R10 are internal build designs. Utility specific builds begin at R11. If the part number contains R2, R5, R6, R7, R8, or R9 the unit may comply with a specific local utilty for primary and secondary voltages but may not comply for equipment connections, included accessories, labeling, or barcoding. Units that comply with a specific utility will have reference to the utility company that the unit complies with, and include the utility's internal part number and utility's specification standard if applicable. If you are unable to find the part number that meets your local utility specifications, please contact us and we will assist in crossing the correct unit for you.