Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.498.3364

EPF-LPSM-12-0.33HP-220V.50HZ

12" Explosion Proof Low Pressure Fan - 970 CFM - 1/4 HP - 220V 50 HZ - C1 Group D & C2 Groups F & G

Product ID: 154435

Please see last page for supporting documentation for this product(certificates, CAD files & drawings, IES files, wiring diagrams, etc).



Larson Electronics LLC manufactures a wide variety of products, including custom built to spec designs. The pictures displayed for this unit are a general representation of form factor for the product line and may not accurately represent this exact configuration in every detail due to custom builds and changes between similar products in our standard catalog. The specifics for this configuration are listed in the specification table and supporting documentation (CAD files, Dimensional Drawing, Name Plate Diagram, Wiring Diagram, etc.). This means that specific details (receptacles, plugs, wires, connections, mounting brackets, external finishes, etc.) may not be accurately represented in images vs specifications. Please review specifications and do not order based solely on images.

EPF-LPSM-12-0.33HP-220V.50HZ Explosion Proof Low Pressure Fan - 1,250 CFM - 1/4 HP - 115V - C1 Group D & C2 Groups F & G
Type: Low Pressure Industrial Fan
Propeller Dimensions: EPF-LPSM-12-0.33HP-220V.50HZ Diameter
Propeller Material: Spark-Resistant Cast Aluminum
Weight: 34 lbs
Voltage: 220V AC 50 Hz Single Phase
Motor: 1/4 HP Fully Enclosed Explosion Proof
Rotations Per Minutes (RPM): 1800
Peak CFM (@ 0" SP): 1,250
Max Sound Levels @ 5`: 6.7 (sones), 56.06 (db)
Ambient Temp Range: -40°C to +40°C
Wiring: Hard-Wire
Mounting: Permanent Mount (4 Holes)

Ratings/Features:

Listed for United States
Class I, Divisions 1 & 2, Group D
Class II, Divisions 1 & 2, Groups F & G
Spark-Resistant Propeller
Up To 1,250 CFM Air Movement
Rated for Hazardous Environments
Made in the USA

Special Orders - Special Requirements
Contact us for special requirements
Toll Free: 1-800-369-6671
Intl: 1-903-270-1187
Fax: 1-903-498-3364
E-mail: sales@larsonelectronics.com

Made in the USA

The EPF-LPSM-12-0.33HP-220V.50HZ from Larson Electronics is a low pressure explosion proof industrial fan that operates on 230 AC voltage. This explosion proof industrial fan features a 12" diameter spark resistant cast aluminum blade that moves air at a rate of up to 1,250 cubic feet per minute (CFM) for superior ventilation and air movement. The EPF-LPSM-

12-0.33HP-220V.50HZ is powered by a fully enclosed and explosion proof 1/4 horsepower motor.

PLEASE NOTE: ANY FREE SHIPPING OFFERS DO NOT APPLY TO THIS PRODUCT

The EPF-LPSM-12-0.33HP-220V.50HZ explosion proof fan is rated for Class I Group D and Class II Groups F & G hazardous environments. The 12" diameter propeller on this explosion proof low pressure fan is constructed from cast aluminum to resist sparking further increasing the safety of the hazardous environment in which the fan is being utilized. This single phase explosion proof industrial fan has a 1/4 horsepower fully enclosed motor that can spin the propeller at a rate of 1800 RPM.

Voltage: The EPF-LPSM-12-0.33HP-220V.50HZ explosion proof ventilation fan can operate on 220V AC 50 Hz.

Wiring: The EPF-LPSM-12-0.33HP-220V.50HZ is a hard-wired ventilation fan that should be installed according to national, state and local electrical and mechanical codes.

Applications: Class I Group D and Class II Groups F & G hazardous areas that require ventilation including but not limited to the following: clean rooms, marijuana extraction rooms, laboratory hoods, oil refineries, grain mills, chemical plants, welding shops, chemical storage areas and battery changing areas.

At Larson Electronics, we do more than meet your lighting needs. We also provide replacement, retrofit, and upgrade parts as well as industrial grade power accessories. Our craftsmen can custom build any lighting system and/or accessories to fit the unique demands of your operation. A commitment to honesty, quality, and dependability has made Larson Electronics a leader in the lighting and electronics business since 1973. Contact us today at 800-369-6671 or message sales@larsonelectronics.com for more information about our custom options tailored to meet your specific industry needs.

Made in USA Quality

1. Fully enclosed explosion proof 1/4 HP motor.
2. Spark-resistant cast aluminum 12" diameter propeller.
3. Class I Group D and Class II Groups F & G rated.
4. 220 Voltage
5. Moves up to 1,250 cubic feet of air per minute.
6. Fully assembled and ready to install.

CFM Static Pressure (SP) Ratings


1. 0" SP - 1,250 CFM
2. 1/8" SP - 1,125 CFM
3. 1/4" SP - 970 CFM

T3B Temperature Rating

Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671


www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.498.3364

Frequently Asked Questions (FAQ)

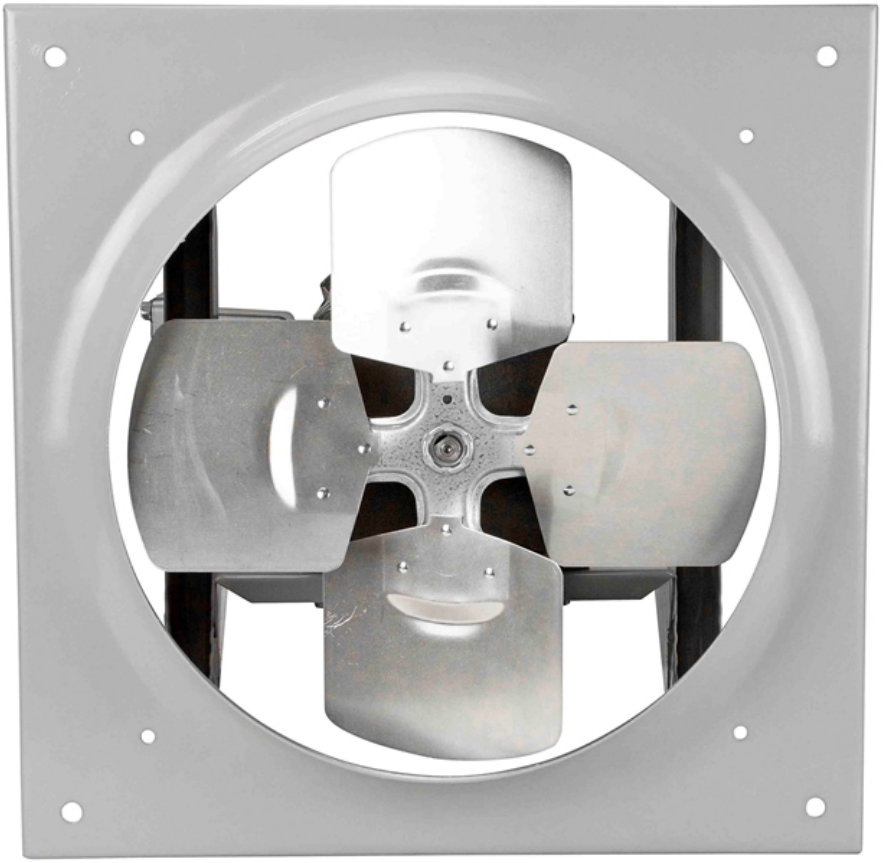





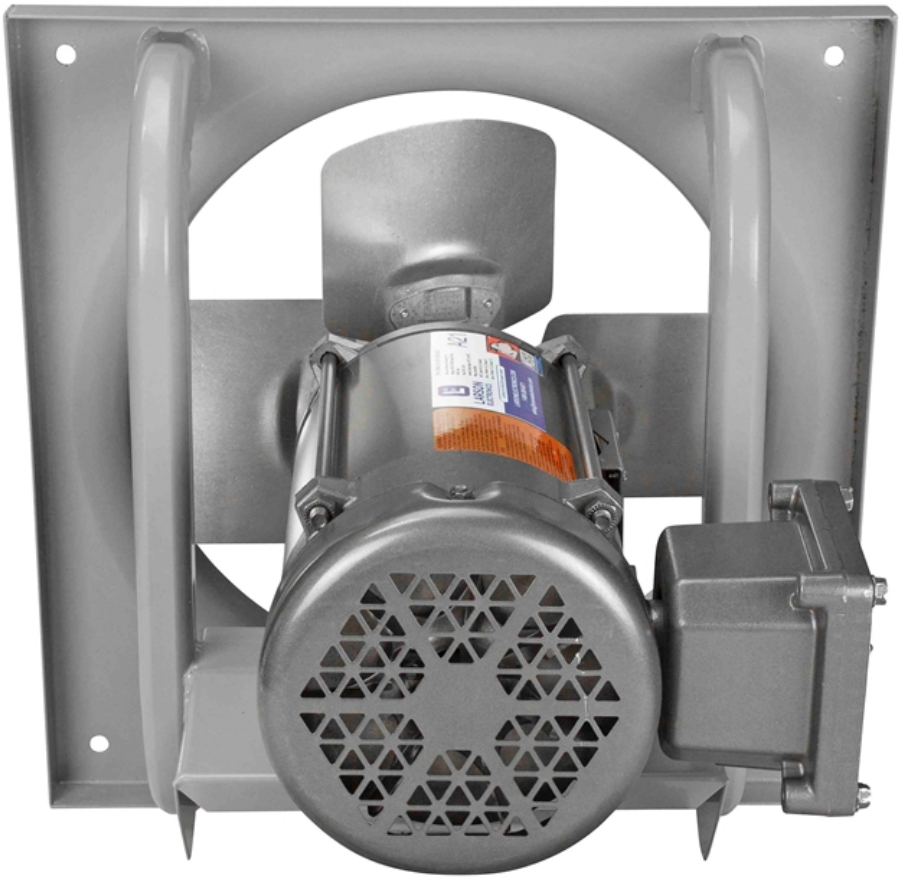

EPF-LPSM-12-0.33HP-220V.50HZ

Product ID: 154435

Export Control Classification Number (ECCN): EAR99

Links (Click on the below items to view):

- Canadian CEC Certificate (Commonly referred to as CSA Certificate)
- CE Certificate
- Certificate 1, Misc
- Certificate 2, Misc
- Certificate 3, Misc
- Dimensional Drawing 2D
- MSDS (Material Safety Data Sheet
- Operations Manual
- RoHS Certificate (Restriction of Hazardous Substances)
- USA NEC Certificate (Commonly referred to as UL Certificate)
- Wiring Diagram (Oneline)
- HigResPic1
- HigResPic2
- HigResPic3
- HigResPic4
- HigResPic5
- HigResPic6
- HigResPic7
- HigResPic8
- HigResPic9
- HigResPic10
- ISO 9001 Certification
- Business Certificate
- Shipping Time Map