Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.765.7664

DCP-12x72-27A-WP

Encapsulated DC to DC Stepup Transformer - 12V DC to 72V DC - 27 Amps - Flying Leads - Waterproof

Product ID: 302618



Image: DCP-12x72-27A-WP

Larson Electronics LLC manufactures a wide variety of products, including custom built to spec designs. The pictures displayed for this unit are a general representation of form factor for the product line and may not accurately represent this exact configuration in every detail due to custom builds and changes between similar products in our standard catalog. The specifics for this configuration are listed in the specification table and supporting documentation (CAD files, Dimensional Drawing, Name Plate Diagram, Wiring Diagram, etc.). This means that specific details (receptacles, plugs, wires, connections, mounting brackets, external finishes, etc.) may not be accurately represented in images vs specifications. Please review specifications and do not order based solely on images.

DCP-12x72-27A-WP - DC to DC Step-up Transformer

Line In Voltage: 12V DC
Line Out Voltage: 72V DC @ 27 Amps
Watts: 1944
DC Input Connector: 5" Pigtail, Flying Leads
DC Output Connector: 5" Pigtail, Flying Leads
Voltage Accuracy: +/- 1.5%
Output Frequency: 43 KHz
Line-In Regulation: +/- 0.2%
Line-Out Regulation: +/- 0.2%
Temperature Coefficient: +/- 0.03% /°C
Protection: Short Circuit/Overload/ Over Voltage
Operating Temp: -10°C to +60°C
Efficiency: ≥86%
Dimensions: 11.85"L x 9.48"W x 3.7"H
Mounting: (2) Side Located Thru-Holes
Weight: 0.75 Lbs

DCP-12x48-30A-WP Features

IP68 Rated Waterproof
Overload, Short Circuit, Over Voltage Protection
International Lighting Safety Standards Compliant
Suitable For LED Moving Signs
Suitable For Wet or Damp Locations

Special Orders - Special Requirements

Contact us for special requirements
Toll Free: 1-800-369-6671
Intl: 1-903-270-1187
Fax: 1-903-765-7664
E-mail: sales@larsonelectronics.com

The Larson Electronics DCP-12x72-27A-WP Waterproof DC to DC Step-up Transformer converts 12V DC electrical current to 72V DC at 27 amps max. This converter includes flying leads to hard wire this unit inline. This unit takes 12 volts DC and increases it to 72 volts DC, allowing users to use 12 volt DC power to operate equipment like our LED light bars and Golights that require 72 volts DC current.

The DCP-12x72-27A-WP 1944 watt power converter provides a safe and effective way for users to tap into and utilize 12 Volt DC power sources and step up this current to 72 Volts DC for use with equipment that requires 72V DC electrical power. This unit will output 72 Volt DC current to power lights and equipment up to 1944 watts and 27 amps at 72V DC. This power converter features an encapsulated IP68 waterproof design, making it suitable for indoor or outdoor use and is wet-damp area approved. This converter includes integral short circuit, over voltage, and overload protection that will shut down the unit or reduce output in case of faults and overloads to protect the unit and connected equipment from damage.


The small size and wide input voltage range of this unit make it ideal for indoor-outdoor operation of Larson Electronics LED light bars, Golights and other equipment that requires 72V DC current in locations where 12 volt DC power is readily available.

This converter is equipped with two 5" wires on the input side and two 5" wires on the output side. All leads are stripped and tinned for equip installation.


Features: The DCP-12x72-27A-WP converter features 12V DC input capability and converts this DC power input to 1944 watt, 27 Amp 72VDC. IP68 rated, this unit is waterproof, wet and damp area approved and suitable for indoor or outdoor applications. Integrally designed protection includes overload, short circuit, and over voltage safeguards to prevent overheating and unit damage in case of faults or overly heavy current draw. This unit will limit current when an over current condition is encountered and recovers when the condition is removed. This unit will enter hiccup mode under short circuit conditions and recover when the fault is removed.


This transformer is enclosed a cast aluminum housing for heat distribution. All electronic components are encapsulated within the housing. This power converter has a -10°C to +60°C operating temperature range. This unit has a 95% conversion efficiency and is suitable for use with moving LED signs and similar LED equipment. These units have a fixed switching frequency at 43KHz.

NOTE: In order to obtain the best performance and the longest operational life from these units, it is recommended that you do not exceed 75% of the unit’s output amperage. To determine if this converter suits your desired application, add together the total wattage of the equipment you intend to use with this unit and divide this total by 72 volts to find the total amperage draw that will be placed upon the converter. For example, if you are using two of our LEDP10W-120E 120 watt LED lights, 120 watts divided by 48 volts is 5 amps. This would mean the DCP-16-DP is well suited as it would run at under 75% capacity to produce the necessary 5 amps. Running these units at 100% of their capacity can create excess heat and lead to shortened converter life.

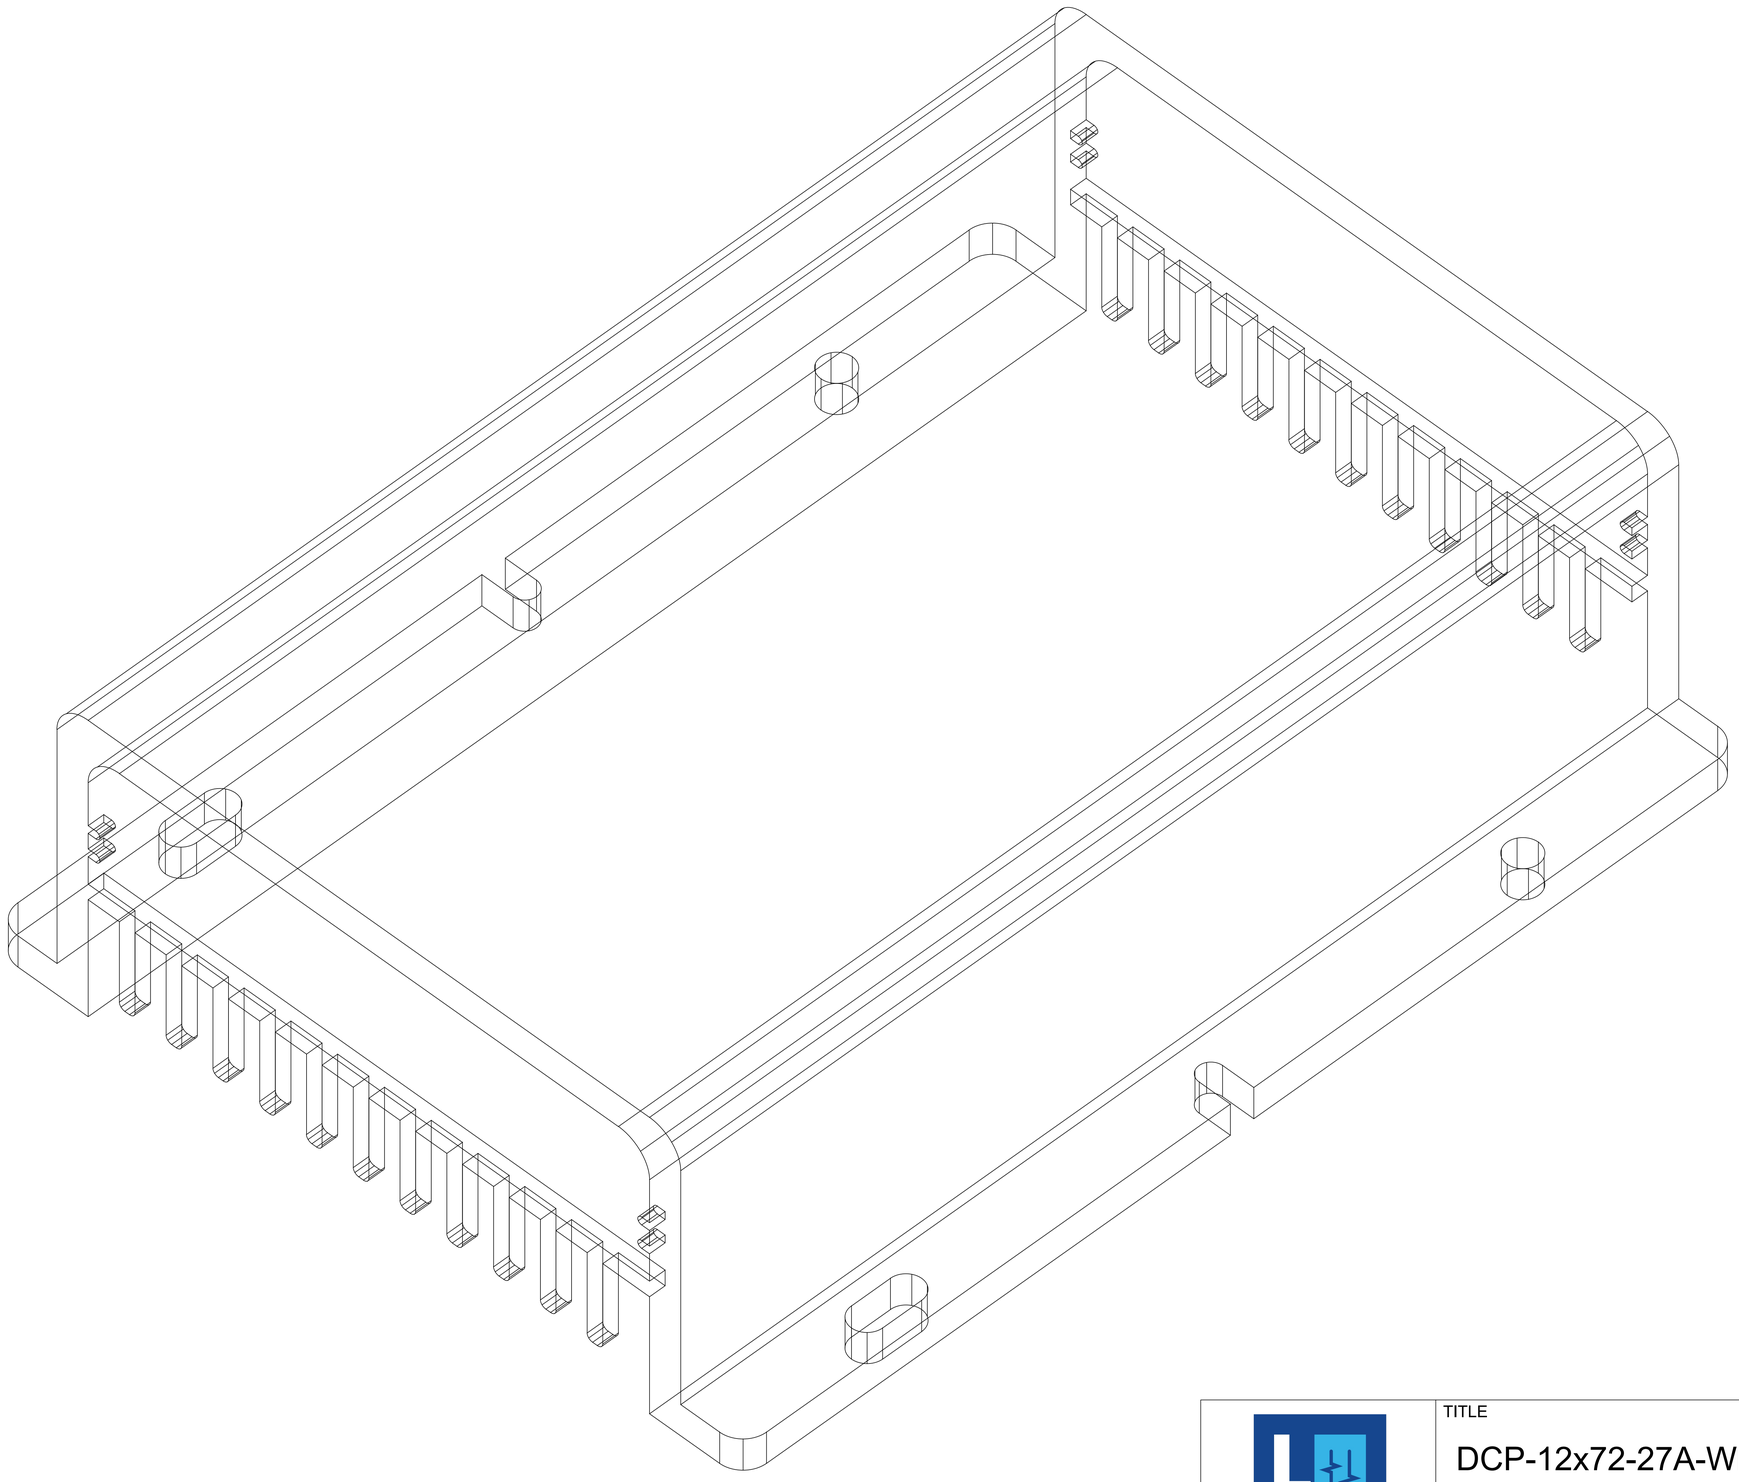

LARSON MAGNETICS	TITLE: DCP-12x72-27A-WP		
	DRAWN BY	DATE	REV
9419 E US HWY 175, KEMP, TX 75143	CHECKED BY	SHEET # OF	DRAWING #

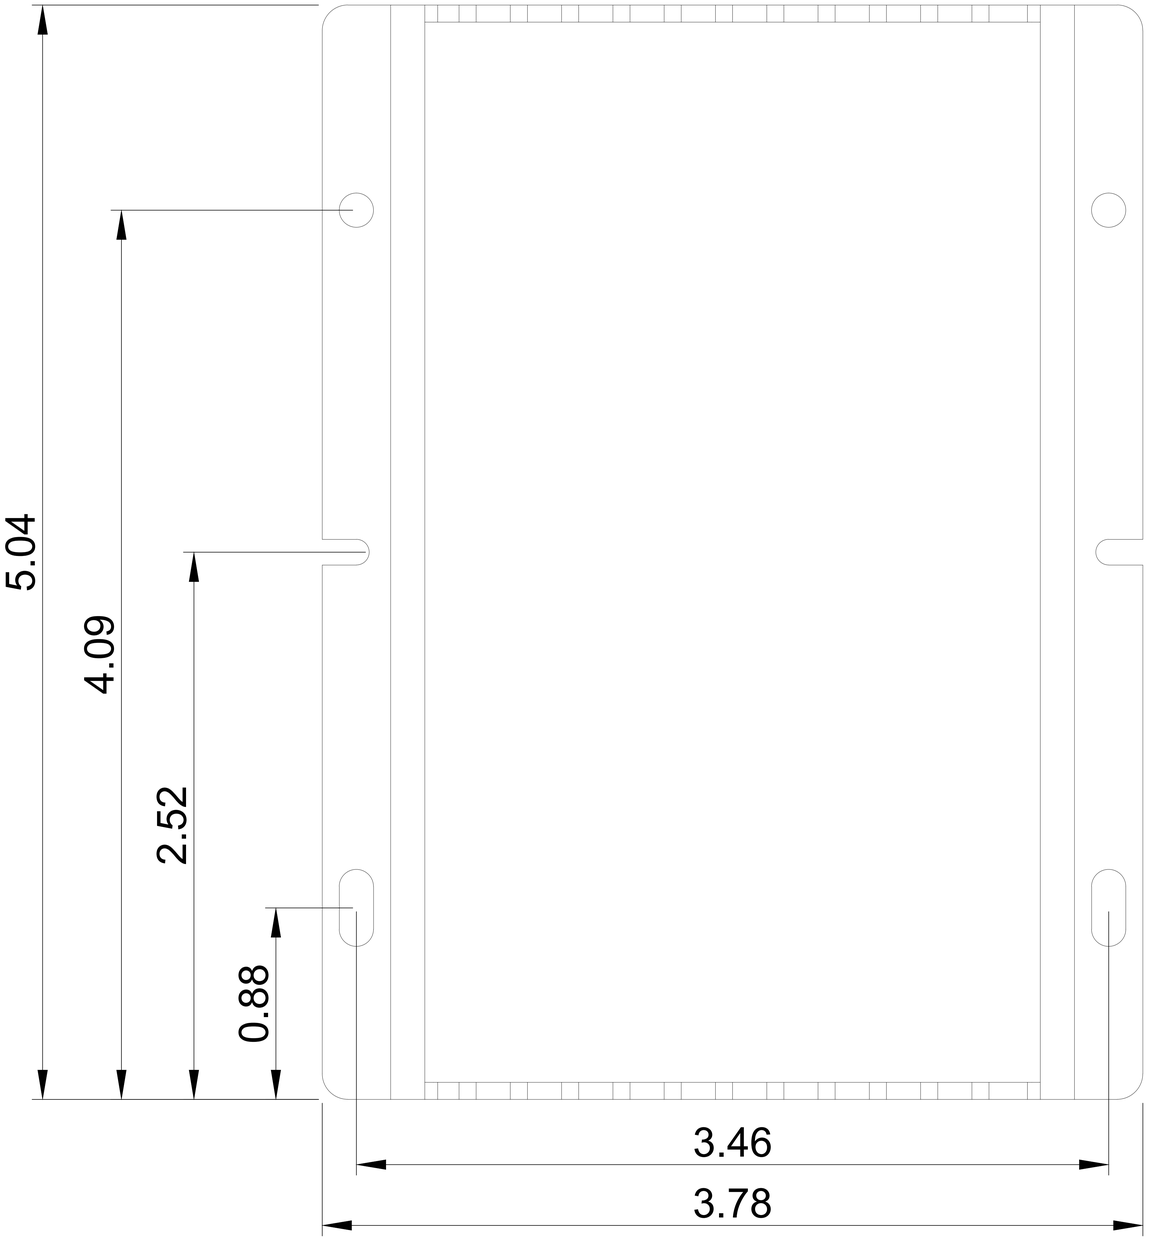

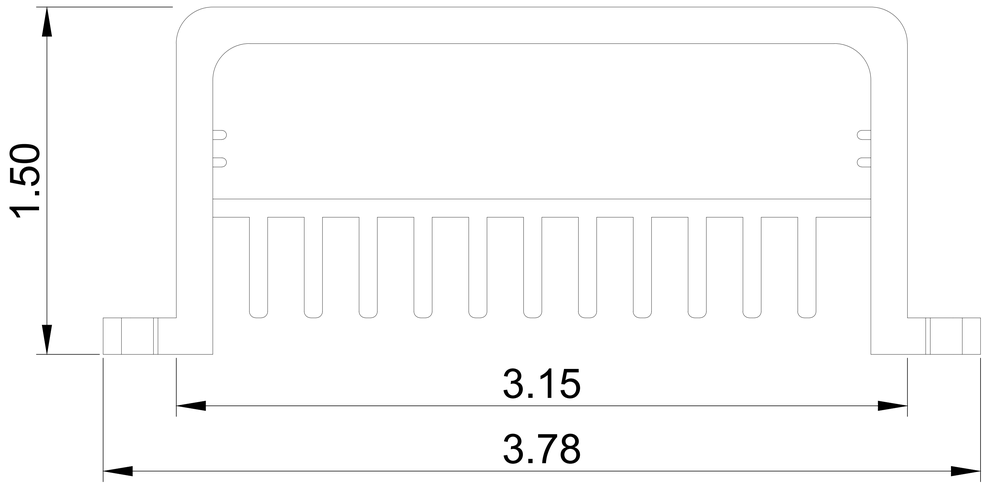

LARSON MAGNETICS

9419 E US HWY 175,
KEMP, TX 75143

TITLE: DCP-12x72-27A-WP			
DRAWN BY	DATE	REV	
CHECKED BY	SHEET # OF	DRAWING #	

Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.765.7664



Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.765.7664

Frequently Asked Questions (FAQ)

There are no Faqs