Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.498.3364

WAL-M-3X150-120

120 Volt Flood Light (Blasting Light) - Magnet Mount - Polyurethane - 25 foot 6/3 Cord

Product ID: 1890

Please see last page for supporting documentation for this product(certificates, CAD files & drawings, IES files, wiring diagrams, etc).



Larson Electronics LLC manufactures a wide variety of products, including custom built to spec designs. The pictures displayed for this unit are a general representation of form factor for the product line and may not accurately represent this exact configuration in every detail due to custom builds and changes between similar products in our standard catalog. The specifics for this configuration are listed in the specification table and supporting documentation (CAD files, Dimensional Drawing, Name Plate Diagram, Wiring Diagram, etc.). This means that specific details (receptacles, plugs, wires, connections, mounting brackets, external finishes, etc.) may not be accurately represented in images vs specifications. Please review specifications and do not order based solely on images.

Portable, magnetic mount flood light with three 150 watt (450 watts total) lamps and a total of 300 pounds of magnetic grip. Large carrying handle enables the operator to easily carry and attach this flood light on any ferrous (steel, metal) surface. Molded polyurethane construction is ideal for indoor and outdoor applications. This floodlight is abrasive and chemical resistant. The polyurethane fixture can be washed, cleaned and even decontaminated after use. Originally designed for tank cleaning and tank blasting applications, this heavy duty back light operates on 120 volts. **High voltage implementation is not appropriate for wet area use. Low voltage implementation is suitable for wet area use.**


MADE IN THE USA

The light frame is made from molded polyurethane, which encapsulates the two 4.5 inch diameter, 150 pound grip magnetic bases and three 150 watt, rough surface, PAR 38 flood lights. The polyurethane encapsulation protects mounting surface from scratching by magnetic bases. The polyurethane absorbs shock, protecting the lamps and is impervious to rust, abrasives, chemicals and corrosion.

The portable, magnetic mount flood light ships with three 150 Watt rough surface lamps. This light has industrial grade, rough surface lens bulbs that have double filaments to improve durability, temperature resistance and longevity. Any PAR 38 lamp found in your local

hardware store can be used as a replacement. A special seal is provided to create a water tight seal between the socket and the bulb inside the fixture. The supporting lens ring is easily removed and attached, enabling the operator to quickly and easily replace the lamps, even with gloves on.

• Polyurethane construction eliminates the need for a ground wire.
• Silicone gasket seals socket eliminating potential shorting caused by airborne metallic dust and moisture.
• Large grips for secure handling, even with gloves.
• Polyurethane housing provides superior lamp protections guards against breakage from rough handling and vibration.
• Fixture is designed to ventilate heat away from the light for ease of handling.
• Suitable for all temperatures.
• 2 industrial capacity 5.25 inch diameter magnets, encapsulated in polyurethane for protection of the magnet base and any surface it is mounted to. Each magnet has 150 pounds of magnetic grip, for a total of 300 pounds of magnetic grip. This enables the operator to "stick" this light to any ferrous (steel, iron, etc) surface.
• Uses Par 38 fixtures in flood configuration. Rough surface, sealed beam lamps are suitable for wet applications for low voltage versions ONLY. This fixture is not appropriate for wet areas in the high voltage applications. Commonly available Par 38 lamps (available at Lowes, Home Depot, Walmart) will work in the fixture.
• Weighs 16 pounds with cord. Dimensions: 16.5" L X 12" H X 9.5" W

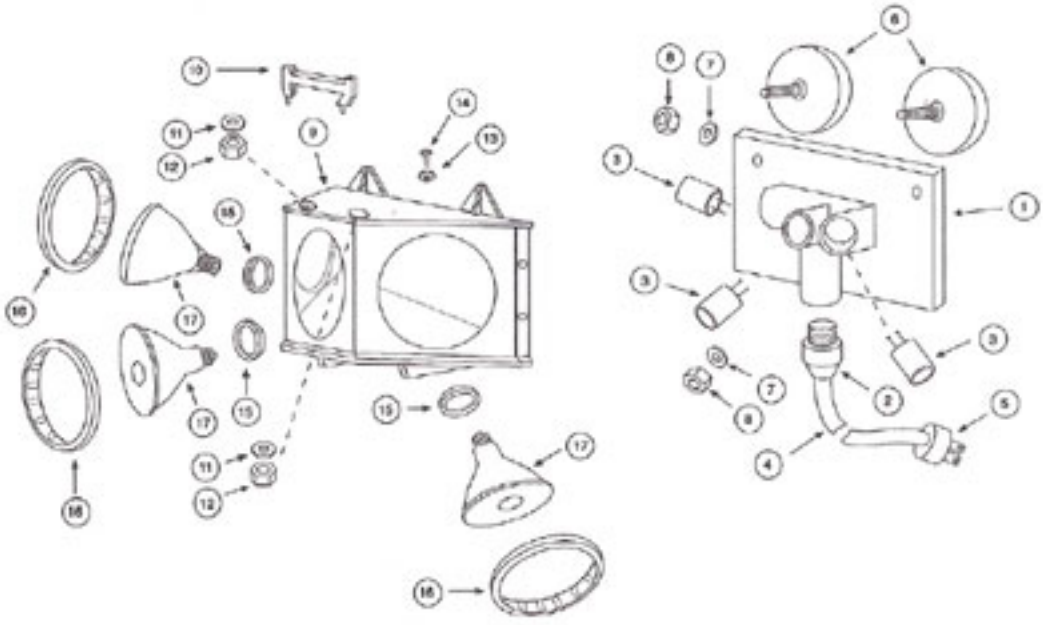

• Includes 25 foot, industrial grade 6/3 cord that is ¾ inch thick. SOOW cable is oil, chemical and abrasion resistant and is suitable for indoor and outdoor use to -58 degrees.

Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.498.3364

Frequently Asked Questions (FAQ)

WAL-M-3X150-120

Product ID: 1890

Export Control Classification Number (ECCN): EAR99

Links (Click on the below items to view):

- **Video1**
- **ISO 9001 Certification**
- **Business Certificate**
- **Shipping Time Map**