Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.498.3364

IND-SFC-1P-0.75KVA-220V.EU-50HZ-120V.US-60HZ

0.75 KVA Solid-state Frequency Converter - 220V 50Hz Euro Input to 120V 60Hz USA Output - 1PH - Front Handles

Product ID: 311803



Larson Electronics LLC manufactures a wide variety of products, including custom built to spec designs. The pictures displayed for this unit are a general representation of form factor for the product line and may not accurately represent this exact configuration in every detail due to custom builds and changes between similar products in our standard catalog. The specifics for this configuration are listed in the specification table and supporting documentation (CAD files, Dimensional Drawing, Name Plate Diagram, Wiring Diagram, etc.). This means that specific details (receptacles, plugs, wires, connections, mounting brackets, external finishes, etc.) may not be accurately represented in images vs specifications. Please review specifications and do not order based solely on images.

IND-SFC-1P-0.75KVA-220V.EU-50HZ-120V.US-60HZ Frequency Converter

Unit Type: Solid-state Static Frequency Converter
Dimensions: 16.92" x 18.11" x 7.08"
Weight: 99.2 lb
Input Voltage: 220V Euro 1PH +/- 5%
Input Frequency: 50 Hz +/- 5%
Input Connection:L1 + N (EU Spec)
Capacity: 0.75 KVA - 100% Load - 30 Mins
Output Voltage: 120V USA 1PH +/- 2%
Output Frequency: 60 Hz +/- 5%
Output Amps: 5.75A @ 120V Setting 0-150V (Low Grade)
Output Connection: L1 + L2 (USA Spec)
Rectification: IGBT
Efficiency Ratio: Up to 95%
Load Stabilization Rate: < +/- 1%
Frequency Stability: < +/- 0.01%
Harmonic Distortion: Pure Sine Wave < 2%
4-digit Meters: Digital Frequency Meter - Resolution 0.1Hz/Step; Digital Voltage Meter - Resolution 0.1V; Digital Ammeter - Resolution 0.1A; Digital Watt Meter - Resolution 0.1W
Protection: Overload, Short Circuit, Over Temp, Instant Power Failure Protection, Alarm
Operating Temp: 0° - 40°C
Humidity: 0-90% (Non-condensation)

Features/Ratings

NRTL Listed to UL 508A
Advance Microprocessor Control
True Online Double Conversion
Smart Fan Control
Low Input THDi < 3%

Special Orders - Special Requirements

Contact us for special requirements

Intl: 1-903-270-1187
Toll Free: 1-800-369-6671

Mounting: Standalone w/ Front Handles

Color: Tan

Fax: 1-903-498-3364

E-mail: sales@larsonelectronics.com

The Larson Electronics IND-SFC-1P-0.75KVA-220V.EU-50HZ-120V.US-60HZ Solid-state Frequency Converter is designed for voltage and frequency rectification in industrial locations. The 0.75 KVA static converter comes with an input voltage/frequency of 220V Euro single-phase 50 Hz and an output voltage/frequency of 120V USA single-phase 60 Hz. This unit is equipped with front handles and circular pads at the bottom of the converter.

The IND-SFC-1P-0.75KVA-220V.EU-50HZ-120V.US-60HZ can be used to accurately convert voltages and frequencies in industrial sites. This 0.75 KVA unit offers 220V Euro single-phase 50 Hz on the input side and 120V USA single-phase 60 Hz on the output side. Output amps are 5.75A @ 120V setting 0-150V (low grade). During operation, rectification is completed via IGBT. The static frequency converter provides robust microprocessor control, true online double conversion and active input power factor correction. Input connection contains L1+N (EU spec), while output connection contains L1+L2 (USA spec).


This solid-state frequency converter is equipped with several protective features, including overload, short circuit, over temp, instant power failure connection and alarm. Available meter components include digital frequency meter, digital voltage meter, digital ammeter and digital watt meter.

Mounting: The IND-SFC-1P-0.75KVA-220V.EU-50HZ-120V.US-60HZ is a standalone unit with front handles and bottom-located pads.

Applications: Industrial facilities, laboratories, air compressor testing, power supply testing, motor equipment testing, quality assurance, lighting systems and more.

At Larson Electronics, we do more than meet your lighting needs. We also provide replacement, retrofit, and upgrade parts as well as industrial grade power accessories. Our craftsmen can custom build any lighting system and/or accessories to fit the unique demands of your operation. A commitment to honesty, quality, and dependability has made Larson Electronics a leader in the lighting and electronics business since 1973. Contact us today at 800-369-6671 or message sales@larsonelectronics.com for more information about our custom options tailored to meet your specific industry needs.


WATT
Hz
V
A
OUTPUT
LARSON
ELECTRONICS
Frequency Converter
INPUT
POWER
ON
OFF/RESET
VOLTAGE
150-300V
0-150V
FREQUENCY
0 5 3 0
VOLTAGE ADJ.
MIN.
MAX
W/PF
OUTPUT

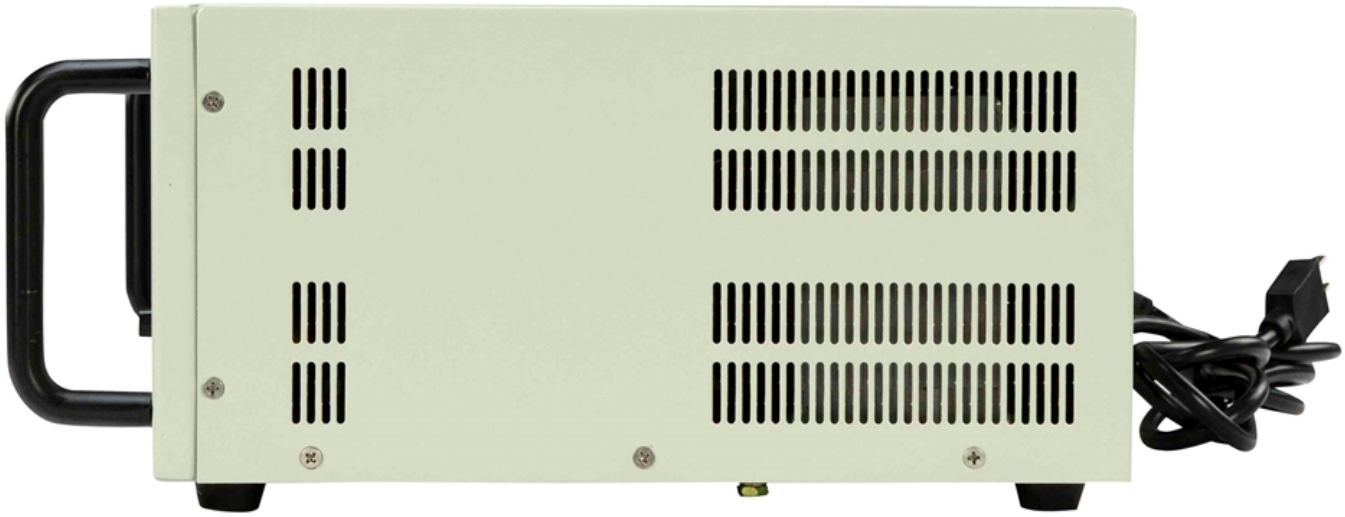


LARSON ELECTRONICS
IND-SFC-1P-1KVA-220V.EU-50HZ-120V.US-60HZ
SERIAL: 3039436
A46
MISTER
NOTICE
Input Voltage
220V AC
FUSE
15A


NOTICE
Input Voltage
220V AC
15A

Frequently Asked Questions (FAQ)