

MT-CTX-120V-100VA-4V

100 VA Control Transformer - 120V Input Voltage - 4V Output Voltage

Product ID: 324652



Image: MT-CTX-120V-100VA-4V

Larson Electronics LLC manufactures a wide variety of products, including custom built to spec designs. The pictures displayed for this unit are a general representation of form factor for the product line and may not accurately represent this exact configuration in every detail due to custom builds and changes between similar products in our standard catalog. The specifics for this configuration are listed in the specification table and supporting documentation (CAD files, Dimensional Drawing, Name Plate Diagram, Wiring Diagram, etc.). This means that specific details (receptacles, plugs, wires, connections, mounting brackets, external finishes, etc.) may not be accurately represented in images vs specifications. Please review specifications and do not order based solely on images.

MT-CTX-120V-100VA-4V Control Transformer

Phase: Single Phase
Frequency: 50/60 Hz
kVA: 100 VA (0.10 kVA)
Primary Voltage: 120 V
Primary Connection: Series (V)
Primary FCAN (Std.): 0 x 0%
Primary FCBN (Std.): 0 x 0%
Secondary Voltage: 4 V
Secondary Connection: Parallel x Series (Vx2V)
Material: Copper
Primary Termination: Terminal Block
Secondary Termination: Terminal Block
Insulation: 130°C
Temperature Rise: 80°C
Enclosure Material: Injection Molded Cover
Mounting: Heavy Steel Feet
Dimensions: 3.38"H x 3.75"W x 3.50"D
Weight: 5.9 lb

Approvals/Ratings

NRTL Listed for United States and Canada
NRTL Certified to CSA 22.2 NO 66.1
NRTL Certified to CSA 22.2 NO 66.2
NRTL Certified to UL 5085-1
NRTL Certified to 5085-2
Control Transformer

Special Orders - Special Requirements

Contact us for special requirements
Toll Free: 1-800-369-6671
Intl: 1-903-270-1187
Fax: 1-903-765-7664
E-mail: sales@larsonelectronics.com

The MT-CTX-120V-100VA-4V from Larson Electronics is a Single Phase Control Transformer that is powerful and reliable. With high-quality silicon steel laminations providing optimal performance, the MT-CTX-120V-100VA-4V provides increased reliability and protection against critical equipment failures. This control transformer

features a terminal block design that allows for hook up along with the ability to easily install fuse clips to the unit. The molded coil covers give this control transformer superior cooling abilities and a sleek appearance.

Transformer Features: With a transformer rating of 100 VA (0.10 kVA), the MT-CTX-120V-100VA-4V is a machine tool industrial single phase control transformer with primary voltage of 120 V. It also provides secondary voltage of 4 V. Featuring compact construction, this unit's cores are manufactured with high-quality silicon steel laminations using state of the art technology.

Connecting this unit is simple thanks to the terminal connection numbers being molded into the terminal block which corresponds to the nameplate and wiring diagrams. A unique fin-shaped, injection molded coil cover gives this unit superior cooling abilities. The unit also features a 130°C insulation class with a 80°C temperature rise.

Benefits: The MT-CTX-120V-100VA-4V control transformer offers many benefits to the consumer. Full encapsulation of the windings and internal terminations ensures that the unit is protected from moisture, dirt, dust and other contaminants. Removable finger safe terminal covers contribute towards the overall clean and sleek look of the unit. The design features make this a great choice for industrial tool applications.

This control transformer has heavy steel mounting feet that are either welded or bolted to the core. This transformer features terminal block terminations.


Applications: Power Management, Industrial

Larson Electronics is a manufacturer and as such can build stationary and portable transformer systems to your specifications. Although we carry several models of power distribution transformer systems, we can deliver custom ordered units almost as quickly as our prebuilt units. If this model does not meet your needs, please contact us at 1-800-369-6671 or sales@larsonelectronics.com to discuss your specific requirements.

Wiring Diagram

WARNING: DO NOT SERVICE WHILE ENERGIZED!


MT-CTX-120V-100VA-4V





Connections

Primary Volts	Primary Lines Connect To
120	1-4
Secondary Volts	Secondary Lines Connect To
4	12-15



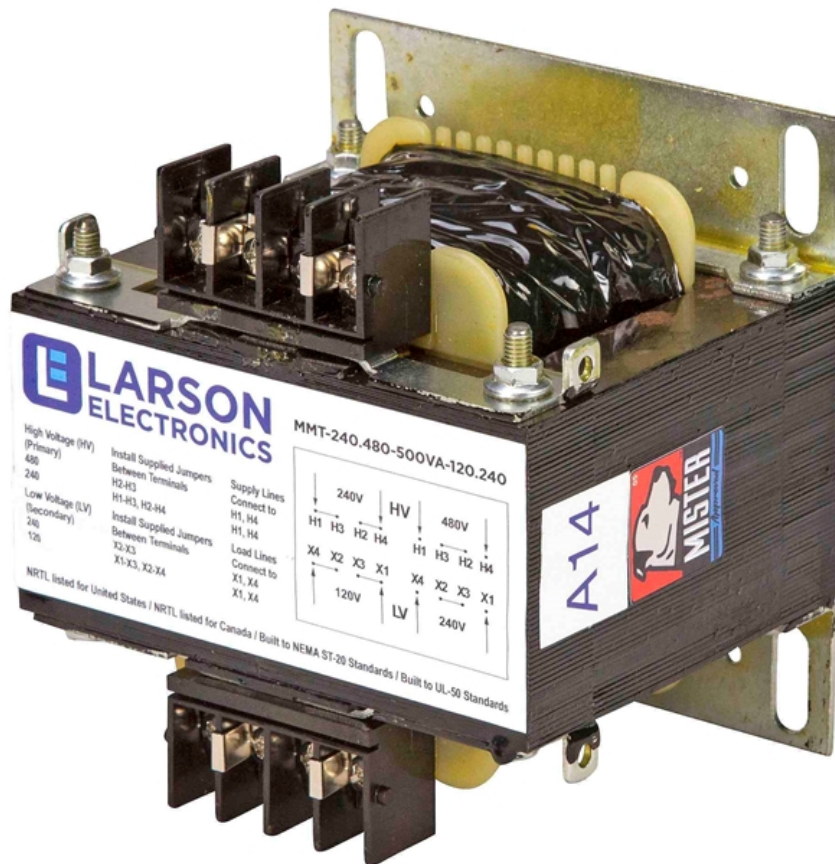

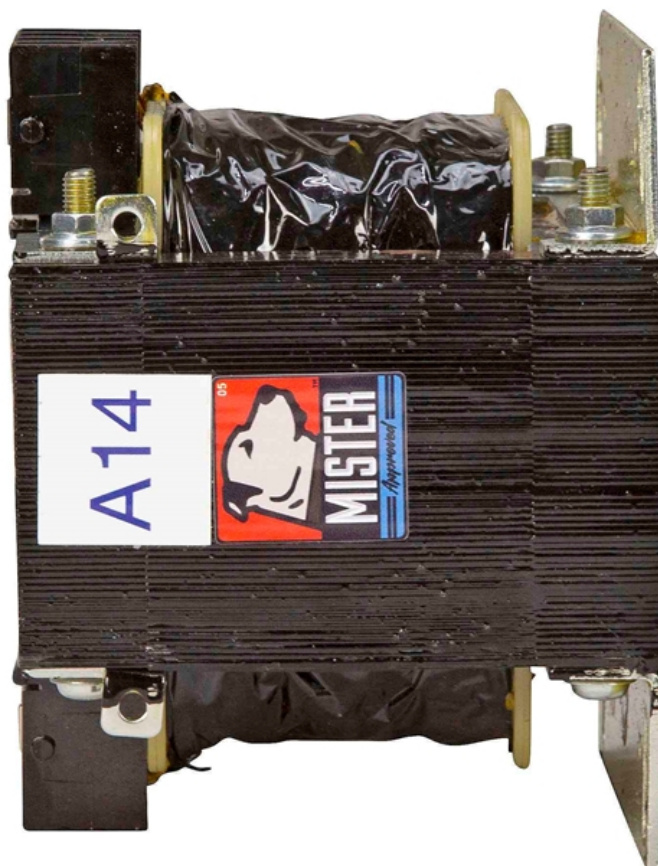

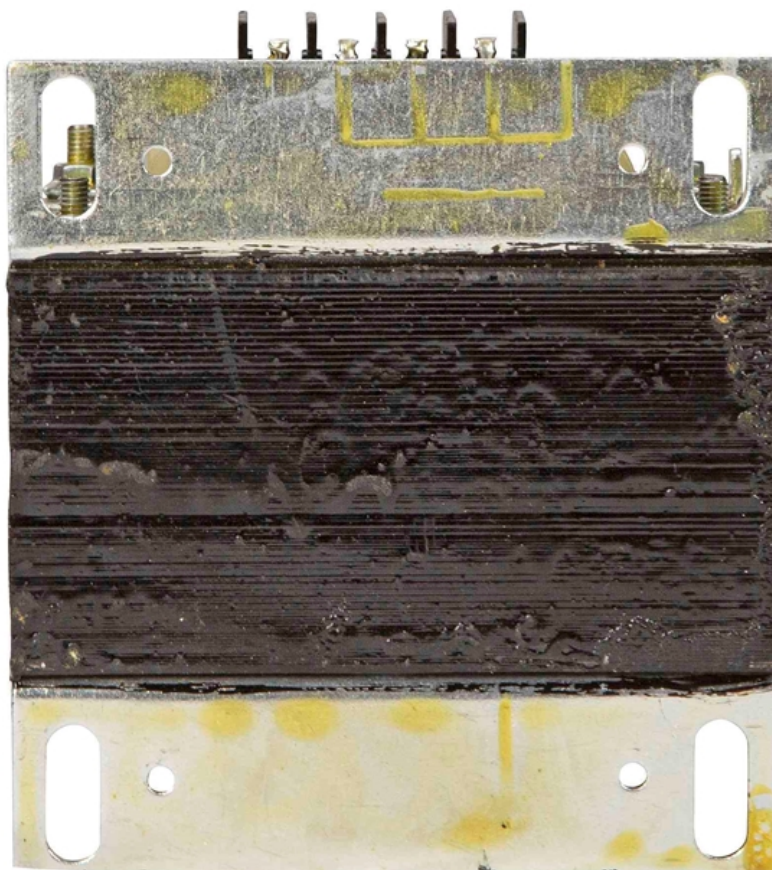



Frequently Asked Questions (FAQ)

There are no Faqs