

MPD-MCS-VCB-3P3W-1.1M.13-7.2KV-2500A-31.5K-DO-FM-BEBE-R.M.-CU-N1-DF-M1

Metal Clad Switchgear, Vacuum Circuit Breaker, 3-Phase 3-Wire, 1 In / 1 Metering Section / 13 Out, 7.2kV, 2500A, Floor-Mounted, Bottom Entry/Bottom Exit, Relay + Meter, NEMA 1, Model 1

Product ID: 339703



Image: MPD-MCS-VCB-3P3W-1.1M.13-7.2KV-2500A-31.5K-DO-FM-BEBE-R.M.-CU-N1-DF-M1

Larson Electronics LLC manufactures a wide variety of products, including custom built to spec designs. The pictures displayed for this unit are a general representation of form factor for the product line and may not accurately represent this exact configuration in every detail due to custom builds and changes between similar products in our standard catalog. The specifics for this configuration are listed in the specification table and supporting documentation (CAD files, Dimensional Drawing, Name Plate Diagram, Wiring Diagram, etc.). This means that specific details (receptacles, plugs, wires, connections, mounting brackets, external finishes, etc.) may not be accurately represented in images vs specifications. Please review specifications and do not order based solely on images.

MPD-MCS-VCB-3P3W-1.1M.13-7.2KV-2500A-31.5K-DO-FM-BEBE-R.M.-CU-N1-DF-M1

Metal-Clad Medium Voltage Switchgear

Unit Type: Draw-Out Vacuum Circuit Breaker Switchgear, 15-Section Lineup

Configuration: 3-Phase, 3-Wire, Dead Front

Assembly Type: 1 Main Incoming / 1 Metering / 13 Outgoing — Metal-Clad Switchgear Lineup

Nominal Voltage: 7.2kV

Short Circuit Rating: 31.5kA Symmetrical, 4 Second

Main Bus Continuous Current: 2500A

Mounting Style: Draw-Out Type, Floor-Mounted

Cable Entry: Bottom Entry / Bottom Exit

Bus Material: Copper, Rigid Bar, Continuous Tie Bus

Enclosure Type: NEMA 1, Dead Front

Main Incoming Section (Qty 1)

Draw-Out Vacuum Circuit Breaker, 2500A Continuous, 31.5kA Symmetrical/4s

Protection Relay: SEPAM 1000+S40

Protection Functions: 27, 46, 50, 50N, 50BF, 51, 51N, 59, 81L, 81H

Metering/Protection CT: 2500/5A, Dual Core (20VA 5P10 Metering + 15VA CI 0.5 Protection)

Local Voltage Transformer: $6.3/\sqrt{3} \div 0.11/\sqrt{3} \div 0.11/3$ kV, CI 0.5 50VA (Metering) / 6P 50VA

Made in the USA

Features of Every Section

Draw-Out Vacuum Circuit Breaker Construction

Dedicated SEPAM 1000-Series Numerical Protection Relay, Each Breaker Position

Dual-Core Measurement + Protection CTs, Each Breaker Position

Earth Fault Protection, Every Feeder Position

Front-Accessible, Freestanding Construction

Ratings & Approvals

Designed in accordance with applicable ANSI/IEEE C37 series standards, including IEEE C37.20.2 (Metal-Clad Switchgear)

NRTL Listed Service Equipment

All grounding shall comply with applicable state and local codes and NEC requirements

Shipping

Shipped on pallet or skid

Crated shipment available upon request

Final shipping configuration subject to approved design

(Protection) — supports 27, 59, 81L, 81H functions

Metering Section (Qty 1)

Voltage Transformer Panel, Bus-Connected, No Breaker

VT Ratio: $6.3/\sqrt{3} \div 0.11/\sqrt{3} \div 0.11/3$ kV

Accuracy: Class 0.5, 50VA (Metering); 6P, 50VA (Earth-Fault Protection Winding)

Outgoing Feeders — 630A Class (Qty 11)

Draw-Out Vacuum Circuit Breaker, 630A Continuous, 31.5kA Symmetrical/4s (each)

8 Positions — Transformer-Fed Loads: 1# Kiln Inlet Distribution Transformer (1250kVA), 1# & 2# Coal Mill Distribution Transformers (1000kVA, 1250kVA), 1# & 2# Raw Mill Distribution Transformers (1000kVA, 1600kVA), and 3 VFD Drive-Transformer Feeders (1# ID Fan 3900kVA, 1# Coal Mill Main 800kVA, 1# Raw Mill Separator 560kVA)

3 Positions — Direct-On-Line Motor Loads: Kiln Waste Gas Fan Motor (1400kW), Hot Gas Fan Motor (280kW), 1# Coal Mill System Fan (710kW)

Protection Relay: SEPAM 1000+T20 (transformer-fed, 8 units) or SEPAM 1000+M41 (DOL motor, 3 units)

Earthing Switch, One per Feeder, Mechanically Interlocked

Visible Grounding Provisions, Each Feeder

Outgoing Feeders — 1250A Class (Qty 2)

Draw-Out Vacuum Circuit Breaker, 1250A Continuous, 31.5kA Symmetrical/4s (each)

Positions: 1# Raw Mill Main Drive Motor (3600kW), 1# Raw Mill Fan Motor (4300kW) — both direct-on-line

Protection Relay: SEPAM 1000+M87 (motor protection with biased differential, switchgear-side CT — motor-terminal CT furnished by others to complete the loop)

Interfaces with customer-furnished power factor correction capacitor bank, each feeder

Earthing Switch, One per Feeder, Mechanically Interlocked

Visible Grounding Provisions, Each Feeder

Protection & Relay Configuration (ANSI/IEEE Device Numbers by Model)

SEPAM 1000+S40 — Main Incomer (1 unit): 27, 46, 50, 50N, 50BF, 51, 51N, 59, 81L, 81H

SEPAM 1000+T20 — Transformer-Fed Feeders (8 units): 26, 46, 50, 50N, 51, 51N, 63

SEPAM 1000+M41 — DOL Motor Feeders (3 units): 27, 46, 47, 48, 49, 50, 50N, 51, 51N

SEPAM 1000+M87 — Large Motor Feeders w/ Differential (2 units): 27, 46, 47, 48, 49, 50, 50N, 51, 51LR, 51N, 59, 63, 66, 87M

Construction

Draw-Out Vacuum Breaker Construction Throughout

Copper Bus, Rigid Bar, Bolted Connections

NEMA 1 Enclosure, Dead Front

Bottom Cable Entry / Bottom Cable Exit, Each Riser

Dimensions & Shipping

Overall Dimensions: 610 in W × 75 in D × 90 in H (estimated, 15-section lineup)

Approximate Weight: 41,100 lbs

Shipping Dimensions: TBD

Shipping Weight: TBD

Special Features

Draw-Out Vacuum Breaker Construction, Dedicated Numerical Protection per Feeder, Biased Differential Protection on Large Motor Feeders

Special Orders – Special Requirements

Contact us for special requirements

Toll Free: 1-800-369-6671

Intl: 1-903-270-1187

Fax: 1-903-765-7664

E-mail: sales@larsonelectronics.com

Larson Electronics manufactures a wide variety of custom power distribution systems. The pictures displayed for this unit are a general representation of form factor and may not accurately represent this exact configuration in every detail due to being custom builds. The specifics for this configuration are listed in the specification table and applicable drawings.

Made in the USA

The Larson Electronics MPD-MCS-VCB-3P3W-1.1M.13-7.2KV-2500A-31.5K-DO-FM-BEBE-R.M.-CU-N1-DF-M1 Metal Clad Medium Voltage Switchgear is designed to provide dependable incoming power distribution, motor feeder protection, and transformer feeder switching for medium-voltage industrial process applications. This fixed, floor-mounted, 15-section switchgear lineup is housed in a NEMA 1 indoor enclosure with dead-front construction and bottom entry/bottom exit cable arrangement throughout. Rated for 7.2kV, the assembly carries a 2500A continuous main bus and a 31.5kA symmetrical, 4-second short-circuit withstand rating, and is built around draw-out vacuum circuit breaker technology with dedicated numerical protection relaying at every position.

****PLEASE NOTE: ANY FREE SHIPPING OFFERS DO NOT APPLY TO POWER DISTRIBUTION PANELS, TRANSFORMERS, OR SUBSTATIONS****

The **MPD-MCS-VCB-3P3W-1.1M.13-7.2KV-2500A-31.5K-DO-FM-BEBE-R.M.-CU-N1-DF-M1** is engineered as a complete switchgear lineup, combining a single main incoming section, a dedicated metering section, and thirteen outgoing feeder sections on a shared continuous copper tie bus. The assembly pairs draw-out vacuum breaker construction with SEPAM 1000-series numerical protection relays and indoor floor-mounted construction to provide coordinated, feeder-by-feeder isolation and protection across a mixed load profile of large motors, distribution transformers, and VFD drive transformers.

Main Incomer Section:

The assembly incorporates one draw-out vacuum circuit breaker in the main incoming position, fixed and floor-mounted, rated 2500A continuous at 7.2kV with a 31.5kA symmetrical, 4-second withstand rating. The breaker is protected by a SEPAM 1000+S40 relay providing undervoltage, negative sequence, overcurrent (first and second stage), earth fault (first and second stage), breaker failure, overvoltage, and under/over frequency protection, with dual-core 2500/5A current transformers supporting metering and protection independently. A dedicated local voltage transformer supports the relay's voltage- and frequency-dependent functions (undervoltage, overvoltage, under/over frequency), rated $6.3/\sqrt{3} : 0.11/\sqrt{3} : 0.11/3$ kV, Class 0.5 metering accuracy with a 6P broken-delta protection winding for ground-fault voltage sensing.

Metering Section:

A dedicated, bus-connected potential transformer panel provides system voltage sensing with no breaker in this position. The voltage transformers are rated at a $6.3/\sqrt{3} : 0.11/\sqrt{3} : 0.11/3$ kV ratio, Class 0.5 accuracy for revenue-grade metering, with a secondary 6P winding for earth-fault protection sensing.

Feeder Sections — 630A Class:

Eleven draw-out vacuum circuit breaker feeder positions are provided, each rated 630A continuous at 7.2kV with a 31.5kA symmetrical, 4-second withstand rating. Eight positions are equipped with SEPAM 1000+T20 protection relays serving distribution and drive transformer loads; three positions are equipped with SEPAM 1000+M41 protection relays serving direct-on-line motor loads. Each feeder includes a mechanically interlocked earthing switch and

visible grounding provisions.

Feeder Sections — 1250A Class:

Two draw-out vacuum circuit breaker feeder positions are provided, each rated 1250A continuous at 7.2kV with a 31.5kA symmetrical, 4-second withstand rating, serving the two largest connected motor loads in this lineup. Both positions are equipped with SEPAM 1000+M87 protection relays, providing motor protection plus biased differential protection via a switchgear-side CT, with the matching motor-terminal CT required to complete the differential loop furnished by others. Each position interfaces with a customer-furnished power factor correction capacitor bank in addition to a mechanically interlocked earthing switch.

Protection & Relay Configuration:

Protection is provided by SEPAM 1000-series numerical relays assigned by feeder class. The main incomer carries a SEPAM 1000+S40 relay (ANSI 27, 46, 50, 50N, 50BF, 51, 51N, 59, 81L, 81H). Transformer-fed feeders carry SEPAM 1000+T20 relays (ANSI 26, 46, 50, 50N, 51, 51N, 63). Direct-on-line motor feeders carry SEPAM 1000+M41 relays (ANSI 27, 46, 47, 48, 49, 50, 50N, 51, 51N). The two large motor feeders carry SEPAM 1000+M87 relays (ANSI 27, 46, 47, 48, 49, 50, 50N, 51, 51LR, 51N, 59, 63, 66, 87M).

Bus System:

The assembly utilizes a 2500A copper main bus, rigid bar construction with bolted connections, together with a copper ground bus, continuous across all 15 sections and sized consistent with the assembly's 31.5kA symmetrical withstand rating.

Assembly Construction:

The switchgear is furnished as a complete floor-mounted lineup incorporating the main incomer, metering section, and thirteen feeder sections on the shared copper tie bus system, with draw-out breaker construction used throughout to allow individual breaker withdrawal for maintenance without de-energizing adjacent sections.

Construction:

The enclosure is fabricated from heavy-gauge steel, rated NEMA 1 for indoor service. Construction features dead-front bushing arrangement and bottom entry/bottom exit cable configuration at each riser, with mechanically interlocked earthing switches and visible grounding provisions at every feeder position.

Special Features:

This unit includes draw-out vacuum breaker construction throughout, dedicated numerical protection relaying at every position, and biased differential protection on both large motor feeders.

Ratings & Approvals:

The assembly is designed in accordance with applicable ANSI/IEEE C37 series standards, including IEEE C37.20.2 for metal-clad switchgear. All grounding provisions shall comply with applicable national, state, and local electrical codes and NEC requirements.

Larson Electronics manufactures a wide variety of custom power distribution systems. The pictures displayed for this unit are a general representation of form factor and may not accurately represent this exact configuration in every detail due to being custom builds. The specifics for this configuration are listed in the specification table and applicable drawings.

At Larson Electronics, we do more than meet your lighting needs. We also provide replacement, retrofit, and upgrade parts as well as industrial grade power accessories. Our craftsmen can custom build any lighting system and/or accessories to fit the unique demands of your operation. A commitment to honesty, quality, and dependability has made Larson Electronics a leader in the lighting and electronics business since 1973. Contact us today at 800-369-6671 or message sales@larsonelectronics.com for more information about our custom options tailored to meet your specific industry needs.

	8	7	6	5	4	3	2	1	
H	REV	DESCRIPTION							DATE
	A								07.14.2026
G									
F	MPD-MCS-VCB-3P3W-1.1M.13-7.2KV-2500A								
E	-31.5K-DO-FM-BEBE-R.M.-CU-N1-DF-M1								
D									
C									
B									
A									
	8	7	6	5	4	3	2	1	



SKU: MPD-MCS-VCB-3P3W-1.1M.13-7.2KV-2500A-31.5K-DO-FM-BEBE-R.M.-CU-N1-DF-M1

Unit Details: Metal Clad Switchgear, Vacuum Circuit Breaker, 3-Phase 3-Wire, 1 Main In / 1 Metering / 13 Out, 7.2kV, 2500A, 31.5kA, Draw-Out Type, Floor-Mounted, Bottom Entry/Bottom Exit, Relay + Meter, Copper, NEMA 1, Dead Front, Model 1

MEDIUM VOLTAGE SWITCH GEAR (METAL-CLAD)

Single Line Diagram

VERTICAL SECTION	AA1	AA2	AA3	AA4	AA5	AA6	AA7	AA8	AA9	AA10	AA11	AA12	AA13	AA14	AA15
7.2kV Metal-Clad Switchgear 3-Phase, 3-Wire 2500A Copper Main Bus 31.5kA Short Circuit 4-Second Rating Draw-Out Vacuum Breaker Construction Throughout SEPAM 1000-Series Protection, Every Position Copper Ground Bus NEMA 1 Indoor Floor Mounted Bottom Entry, Bottom Exit Every Riser Mechanically Interlocked Earthing Switch Every Position															
	Main	PT Panel	Feeder 1	Feeder 2	Feeder 3	Feeder 4	Feeder 5	Feeder 6	Feeder 7	Feeder 8	Feeder 9	Feeder 10	Feeder 11	Feeder 12	Feeder 13
Position / Tag	11P05DH01DH02	11P05DH01TX01	11D04FA01DH01	11D04FA03DH01	11P05TF01DH01	11F05FA01DH01	11F05MV01DH01	11F05FA03DH01	11P05TF03DH01	11P05TF05DH01	11C06MV01DH01	11C06FA04DH01	11C06SP01DH01	11P04TF01DH01	11P04TF03DH01
Purpose	Main Incoming	Bus Metering (PT)	Feeder — VFD Drive Xfmr	Feeder — Motor (DOL)	Feeder — Dist. Xfmr	Feeder — Motor (DOL)	Feeder — VFD Drive Xfmr	Feeder — Motor (DOL)	Feeder — Dist. Xfmr	Feeder — Dist. Xfmr	Feeder — Motor (DOL)	Feeder — Motor (DOL)	Feeder — VFD Drive Xfmr	Feeder — Dist. Xfmr	Feeder — Dist. Xfmr
Rated Current (A)	2500	—	630	630	630	630	630	630	630	630	1250	1250	630	630	630
Protection Relay Model	SEPAM 1000+S40	—	SEPAM 1000+T20	SEPAM 1000+M41	SEPAM 1000+T20	SEPAM 1000+M41	SEPAM 1000+T20	SEPAM 1000+M41	SEPAM 1000+T20	SEPAM 1000+T20	SEPAM 1000+M87	SEPAM 1000+M87	SEPAM 1000+T20	SEPAM 1000+T20	SEPAM 1000+T20
Protection Functions (ANSI)	27, 46, 50, 50N, 50BF, 51, 51N, 59, 81L, 81H	—	26, 46, 50, 50N, 51, 51N, 63	27, 46, 47, 48, 49, 50, 50N, 51, 51N	26, 46, 50, 50N, 51, 51N, 63	27, 46, 47, 48, 49, 50, 50N, 51, 51N	26, 46, 50, 50N, 51, 51N, 63	27, 46, 47, 48, 49, 50, 50N, 51, 51N	26, 46, 50, 50N, 51, 51N, 63	26, 46, 50, 50N, 51, 51N, 63	27, 46, 47, 48, 49, 50, 50N, 51, 51LR, 51N, 59, 63, 66, 87M	27, 46, 47, 48, 49, 50, 50N, 51, 51LR, 51N, 59, 63, 66, 87M	26, 46, 50, 50N, 51, 51N, 63	26, 46, 50, 50N, 51, 51N, 63	26, 46, 50, 50N, 51, 51N, 63
Phase CT Ratio (Meas./Prot.)	2500/5, 20VA 5P10 / 15VA CIO.5	—	500/5, 20VA 5P10 / 15VA CIO.5	200/5, 20VA 5P10 / 15VA CIO.5	150/5, 20VA 5P10 / 15VA CIO.5	50/5, 20VA 5P10 / 15VA CIO.5	100/5, 20VA 5P10 / 15VA CIO.5	100/5, 20VA 5P10 / 15VA CIO.5	100/5, 20VA 5P10 / 15VA CIO.5	150/5, 20VA 5P10 / 15VA CIO.5	500/5, 20VA 5P10 / 15VA CIO.5	600/5, 20VA 5P10 / 15VA CIO.5	75/5, 20VA 5P10 / 15VA CIO.5	150/5, 20VA 5P10 / 15VA CIO.5	200/5, 20VA 5P10 / 15VA CIO.5
Earth Fault CT Ratio	50/5, 10VA 10P10	—	50/5, 10VA 10P10	50/5, 10VA 10P10	50/5, 10VA 10P10	50/5, 10VA 10P10	50/5, 10VA 10P10	50/5, 10VA 10P10	50/5, 10VA 10P10	50/5, 10VA 10P10	50/5, 10VA 10P10	50/5, 10VA 10P10	50/5, 10VA 10P10	50/5, 10VA 10P10	50/5, 10VA 10P10
Differential CT Ratio	—	—	—	—	—	—	—	—	—	—	500/5, 20VA 5P20 (switchgear-side only)	600/5, 20VA 5P20 (switchgear-side only)	—	—	—
Downstream Equipment / Load	Bus	Bus (VT bank)	Drive Xfmr 3900kVA + VFD + Motor 3100kW	Motor 1400kW (DOL)	Dist. Xfmr 1250kVA	Motor 280kW (DOL)	Drive Xfmr 800kVA + VFD + Motor 560kW	Motor 710kW (DOL)	Dist. Xfmr 1000kVA	Dist. Xfmr 1250kVA	Motor 3600kW (DOL)	Motor 4300kW (DOL)	Drive Xfmr 560kVA + VFD + Motor 315kW	Dist. Xfmr 1000kVA	Dist. Xfmr 1600kVA
Remarks	Local PT supports 27/59/81L/81H	Shared bus VT, CI 0.5/6P, 6.3/73+0.11/73+0.11/3	—	—	—	—	—	—	—	—	87M provisioned switchgear-side only; loop completion outside scope	87M provisioned switchgear-side only; loop completion outside scope	—	—	—

NOTES:

- One (1) 2500A draw-out main VCB with one (1) dedicated PT/metering section and thirteen (13) draw-out outgoing feeder positions, per customer SLD 11P05DH01.
- Feeder ratings, positions, and downstream loads shown are as documented on the source SLD, not representative — confirmed against the customer's drawing, not a placeholder schedule.
- No spare positions are shown on the source SLD; none included in this offer unless separately requested.
- Capacitor banks and motor-terminal differential CTs shown on the source SLD are customer/vendor-furnished and outside this switchgear's scope of supply.
- Final CT ratios, protection relay settings, and physical dimensions subject to detailed engineering and vendor confirmation.
- Equipment designed in accordance with applicable ANSI/IEEE C37 series standards (including IEEE C37.20.2, Metal-Clad Switchgear), NEC, and NEMA requirements.
- Overall dimensions and weight are engineering-judgment estimates; final figures subject to approved manufacturing drawings.

CONCEPTUAL DRAWING ONLY

This drawing is provided for proposal and reference purposes only. Final design, dimensions, equipment arrangement, ratings, and component selection are subject to detailed engineering review, customer approval, and manufacturing standards.

	TITLE		
	MPD-MCS-VCB-3P3W-1.1M.13-7.2KV-2500A-31.5K-DO-FM-BEBE-R.M.-CU-N1-DF-M1		
	DRAWN BY	DATE	REV
	JMD	07.14.2026	A
9419 E US HWY 175, KEMP, TX 75143	CHECKED BY	SHEET #	DRAWING #
	R.DOMETITA	1 OF 1	101

Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671




www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.765.7664



Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671



www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.765.7664

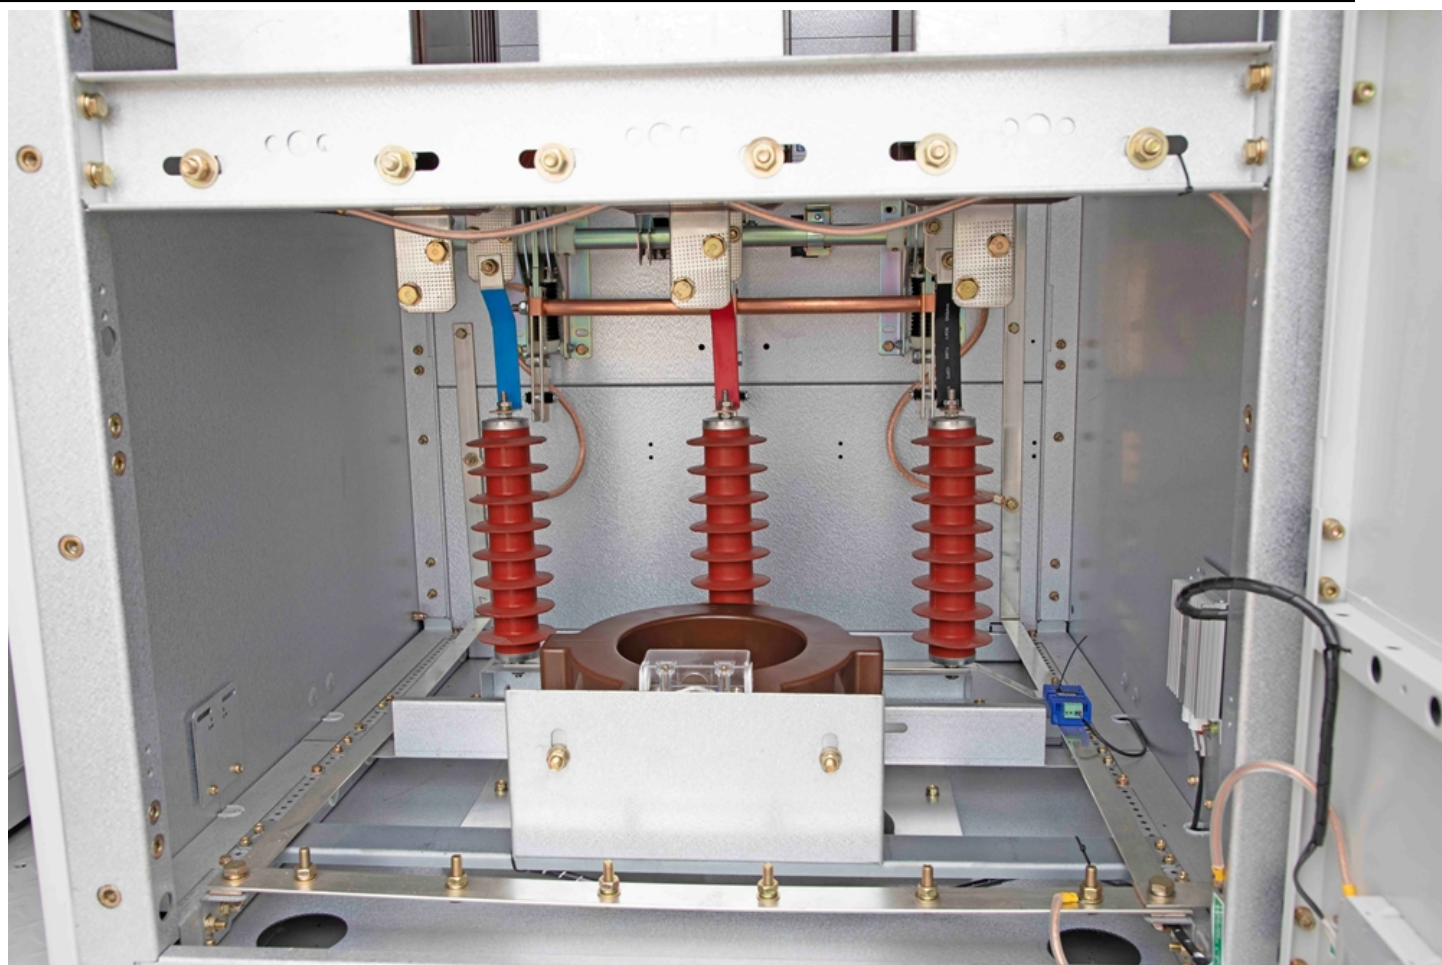

Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671



www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.765.7664







Frequently Asked Questions (FAQ)

There are no Faqs