

Wiring Diagram

WARNING: *DO NOT SERVICE WHILE ENERGIZED!*

MT-PML-R7-1P-GMF.MR-37.5KVA-SZ-LT-DF-A6-BM-CZ-1BZ-M2

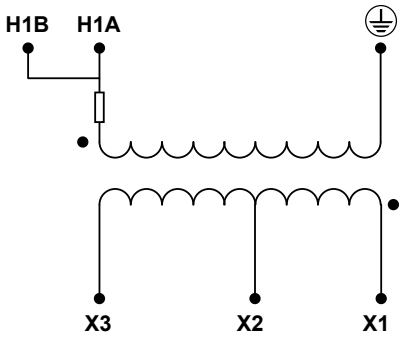


PRIMARY VOLTS		
CONNECT LINES TO H1A, H1B		
TAP	VOLTAGE	VOLTAGE
1	7565	15129
2	7380	14760
3	7200	14400
4	7020	14040
5	6845	13689
SECONDARY VOLTS		
CONNECT LINES	VOLTAGE	
X1, X3	240	
X1, X2	120	

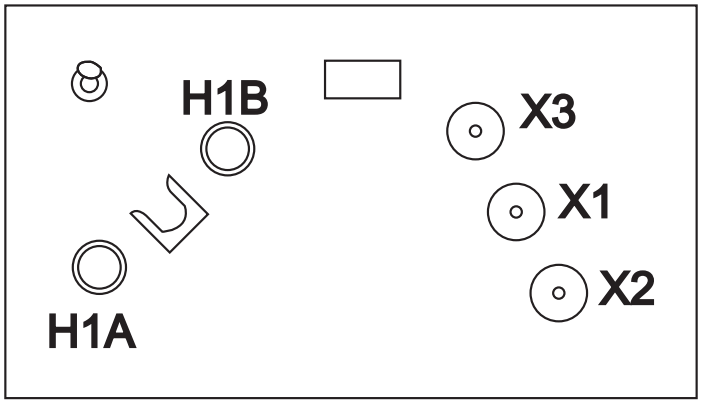

LARSON ELECTRONICS LLC • 9419 E US HWY 175 • KEMP, TX 75143
p: 1-800-369-6671 • intl: 903-498-3363 • f: 903-498-3364 • sales@larsonelectronics.com

Wiring Diagram

MT-PML-R7-1P-GMF.MR-37.5KVA-SZ-LT-DF-A6-BM-CZ-1BZ-M2

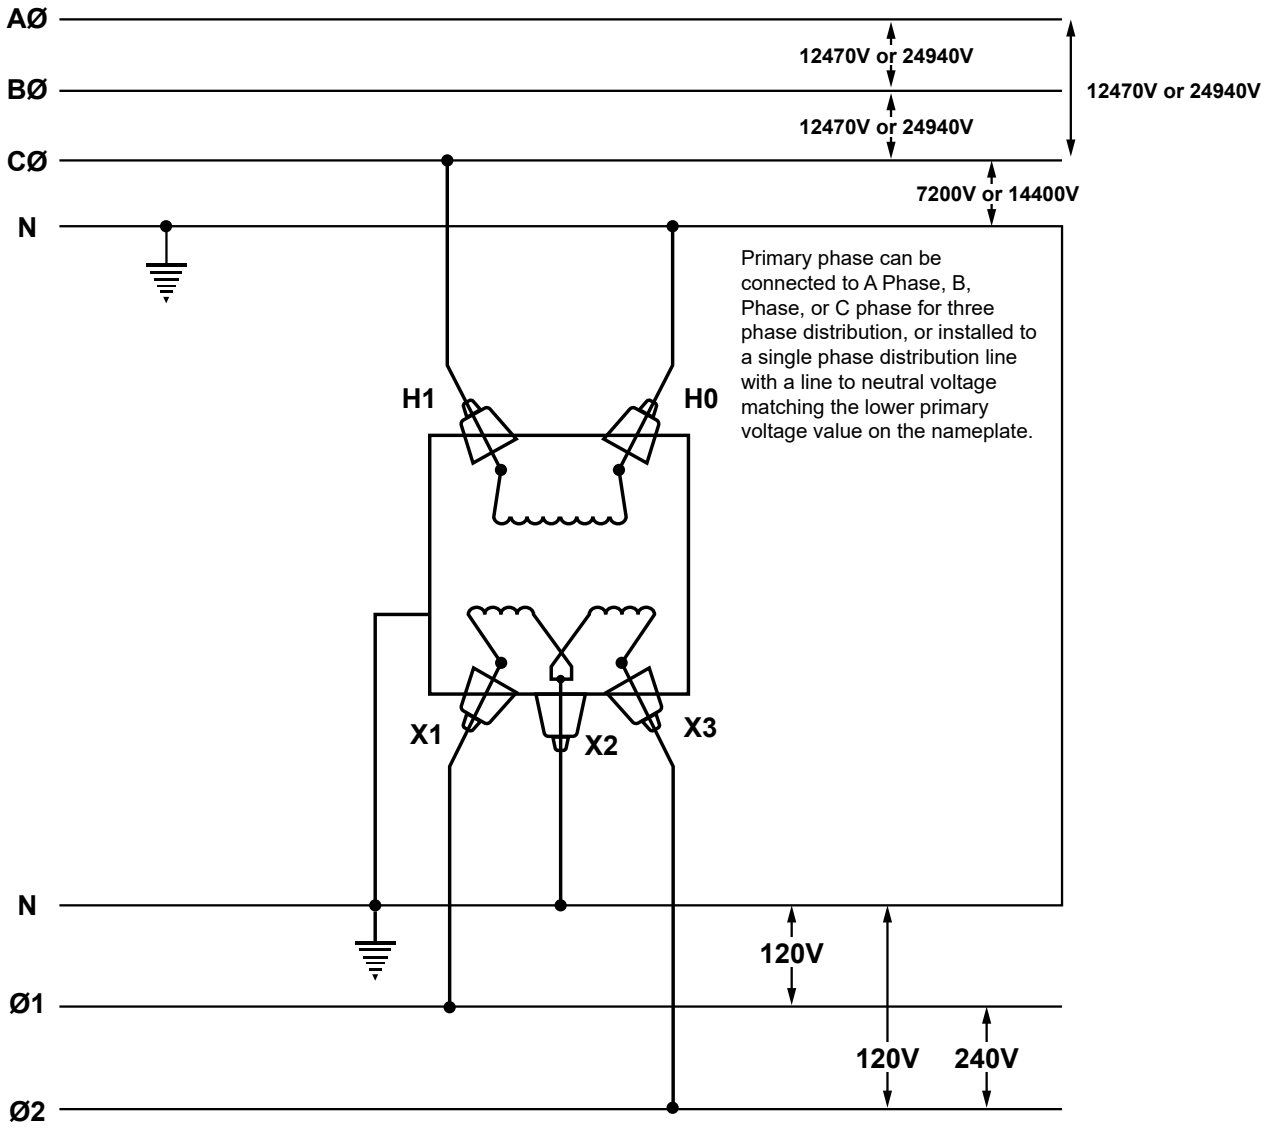

LARSON ELECTRONICS LLC • 9419 E US HWY 175 • KEMP, TX 75143
p: 1-800-369-6671 • intl: 903-498-3363 • f: 903-498-3364 • sales@larsonelectronics.com

PAD MOUNT TRANSFORMER

PART# MT-PML-R7-1P-GMF.MR-37.5KVA-SZ-LT-DF-A6-BM-CZ-1BZ-M2

High Voltage				
Tap Position	Voltage (V)	Current (A)	Voltage (V)	Current (A)
1	7565	4.96	15129	2.48
2	7380	5.08	14760	2.54
3	7200	5.21	14400	2.60
4	7020	5.34	14040	2.67
5	6845	5.48	13689	2.74

Low Voltage	
Voltage (V)	Current (A)
240	156.25
120	312.50

Model No	282095
Rated Capacity	37.5 KVA
Rated Voltage	7.2/14.4-0.12/0.24
Impedence	%
Use Condition	Outdoor
Phase	1 Phase
Vector Group	II6
Rated Frequency	60Hz
Cooling Type	ONAN

Standard	DOE 2016
Product Code	MT-PML
Serial Number	
HV BIL	125
LV BIL	30
Temperature Rise	65°C
Oil Weight	LBS
Total Weight	LBS
Body Weight	LBS
Manufacture Date	

LARSON MAGNETICS