

Wiring Diagram

WARNING: *DO NOT SERVICE WHILE ENERGIZED!*

MT-PML-R9-1P-GMF.MR-25KVA-SZ-LT-DF-Z6-BM-CZ-1BZ-M2

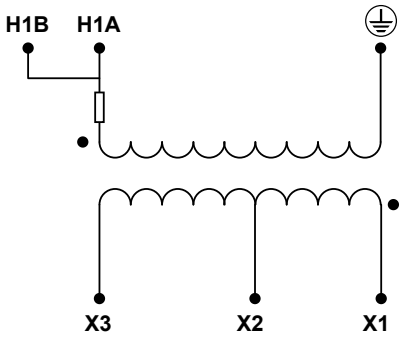


PRIMARY VOLTS		
CONNECT LINES TO H1A, H1B		
TAP	VOLTAGE	VOLTAGE
1	7565	15129
2	7380	14760
3	7200	14400
4	7020	14040
5	6845	13689
SECONDARY VOLTS		
CONNECT LINES	VOLTAGE	
X1, X3	240	
X1, X2	120	

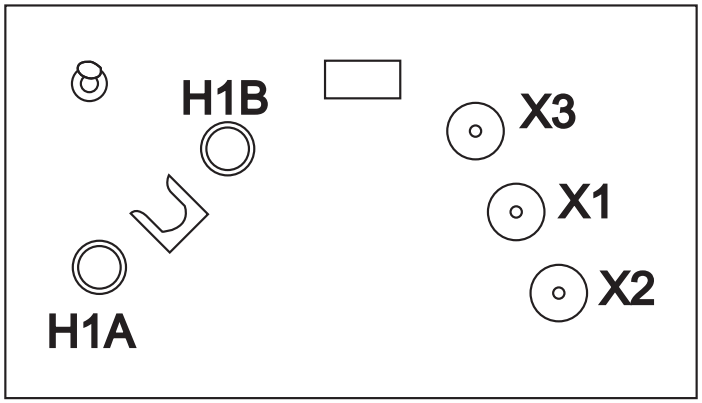

LARSON ELECTRONICS LLC • 9419 E US HWY 175 • KEMP, TX 75143
p: 1-800-369-6671 • intl: 903-498-3363 • f: 903-498-3364 • sales@larsonelectronics.com

Wiring Diagram

MT-PML-R9-1P-GMF.MR-25KVA-SZ-LT-DF-Z6-BM-CZ-1BZ-M2

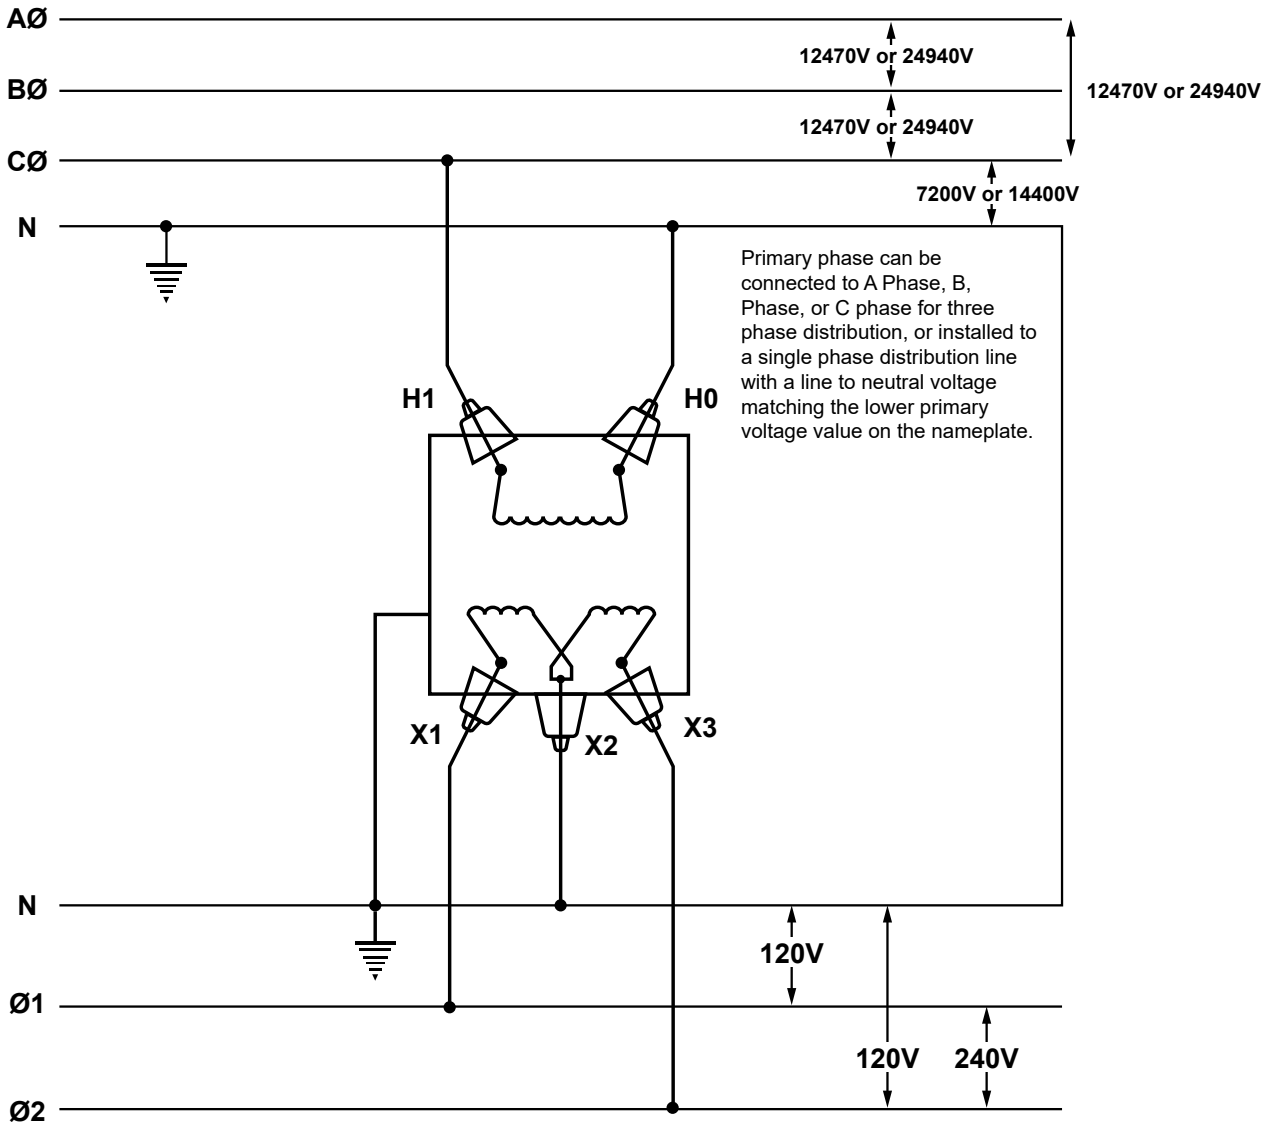

LARSON ELECTRONICS LLC • 9419 E US HWY 175 • KEMP, TX 75143
p: 1-800-369-6671 • intl: 903-498-3363 • f: 903-498-3364 • sales@larsonelectronics.com

SINGLE PHASE PHASE PAD MOUNT TRANSFORMER

PART# MT-PML-R9-1P-GMF.MR-25KVA-SZ-LT-DF-Z6-BM-CZ-1BZ-M2

High Voltage				
Tap Position	Voltage (V)	Current (A)	Voltage (V)	Current (A)
1	7565	3.30	15129	1.65
2	7380	3.39	14760	1.69
3	7200	3.47	14400	1.74
4	7020	3.56	14040	1.78
5	6845	3.65	13689	1.83

Low Voltage	
Voltage (V)	Current (A)
240	104.17
120	208.33

Model No	
Rated Capacity	25 KVA
Rated Voltage	7.2/14.4-0.12/0.24
Impedence	%
Use Condition	Outdoor
Phase	1 Phase
Vector Group	II6
Rated Frequency	60Hz
Cooling Type	ONAN

Standard	DOE 2016
Product Code	MT-PML
Serial Number	
HV BIL	125
LV BIL	30
Temperature Rise	65°C
Oil Weight	LBS
Total Weight	LBS
Body Weight	LBS
Manufacture Date	

LARSON MAGNETICS