

WIRING DIAGRAM FOR ANY OF LARSON'S SIREN, SIGNAL LIGHT, OR STROBING ASSEMBLIES

NOTE

DO NOT CONNECT SIREN CONTROL WIRING TO ANY OUTSIDE VOLTAGE

SIREN
DRIVER

HORN

RJ45-6 LOW VOTAGE SIREN CONTROL WIRING FROM UNIT

All wires shown are located in light junction box


COMMON TO S1 FOR SIREN
COMMON TO S7 FOR HORN
COMMON TO S4 FOR 2-TONE
COMMON TO S3 FOR YELP

COM BRN
S1 ORG/WHT
S7 ORG
S4 GRN/WHT
S3 BLUE

24V

Customer 24V+ controlled horn feed
Customer 24V- ground feed
Customer 24V+ controlled LT1 feed
Customer 24V+ controlled LT2 feed

24V + RED
24V - BLK
24V + BLU
24V + WHT

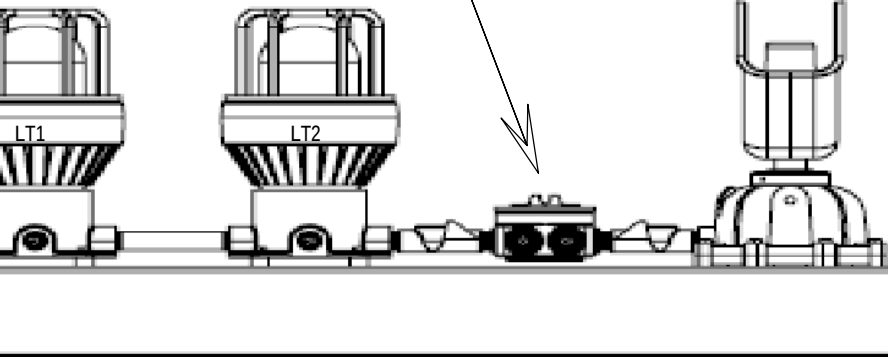

120V

Customer 120V+ controlled horn feed
Customer 120V- neutral feed
Customer 120V+ controlled LT1 feed
Customer 120V+ controlled LT2 feed
Customer earth ground

120V+ BLK
120V- WHT
120V+ RED
120V+ BLUE
GND GRN

240V

Customer 240V+ controlled horn feed
Customer 240V+ controlled horn feed
Customer 240V+ controlled LT1 feed
Customer 240V+ controlled LT1 feed
Customer 240V+ controlled LT2 feed
Customer 240V+ controlled LT2 feed
Customer earth ground

120V+ BLK
120V+ WHT
120V+ RED
120V+ BLUE
120V+ BRN
120V+ ORG
GND GRN

Title
EPL-TL-2X10W-C-PA

Author
David Downs

File
uments\Tiny Cad Files\EPL-TL-2X10W-C-PA.dsn

Document

Revision
1.0

Date
02/02/2017

Sheets
1 of 1