Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.498.3364

CHICO-SPB-5OZ

Explosion Proof Seal Compound - Seal for C1D1 and C2D2 Hazardous Locations - 5oz - Pre-Mixed

Product ID: 263890

Please see last page for supporting documentation for this product(certificates, CAD files & drawings, IES files, wiring diagrams, etc).



Larson Electronics LLC manufactures a wide variety of products, including custom built to spec designs. The pictures displayed for this unit are a general representation of form factor for the product line and may not accurately represent this exact configuration in every detail due to custom builds and changes between similar products in our standard catalog. The specifics for this configuration are listed in the specification table and supporting documentation (CAD files, Dimensional Drawing, Name Plate Diagram, Wiring Diagram, etc.). This means that specific details (receptacles, plugs, wires, connections, mounting brackets, external finishes, etc.) may not be accurately represented in images vs specifications. Please review specifications and do not order based solely on images.

CHICO-SPB-5OZ Explosion Proof Sealing Compound

Size: 5 oz
Seal Time: 5 minutes
Cure Time: 20 minutes
Shelf Life: 18 months
Storage Temperature: 10°C - 85°C

Certifications - Compliance

Class I, Division 1 Groups C, D
Class II, Division 1 Groups E, F, G

Special Orders - Special Requirements

Contact us for special requirements

Toll Free: 1-800-369-6671

Fax: 1-903-498-3364

E-mail: sales@larsonelectronics.com

The CHICO-SPB-5OZ from Larson Electronics is Explosion Proof Sealing Compound that is designed for electrical conductors in hazardous locations. The CHICO-SPB-5OZ comes pre-mixed and measure 5 ounces in size.
This sealing compound separates and forms an explosion proof seal around each conductor and helps to restrict the passage of gases, vapors or flames through the sealed fitting. The CHICO-SPB-5OZ creates a tight seal for electrical conductors used in Class I, Division 1 Groups c and D and Class II, Division 1 Groups E, F and G hazardous locations. Installs seal in 5 minutes and completely hardens within 20 minutes. Packaging includes a 5 oz. pre-measured cartridge and screw-on nozzle

for accurate distribution.

Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671


www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.498.3364


Frequently Asked Questions (FAQ)

Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.498.3364



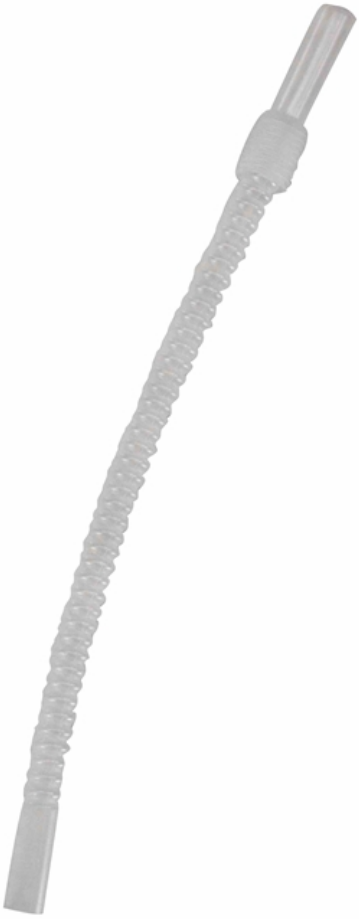

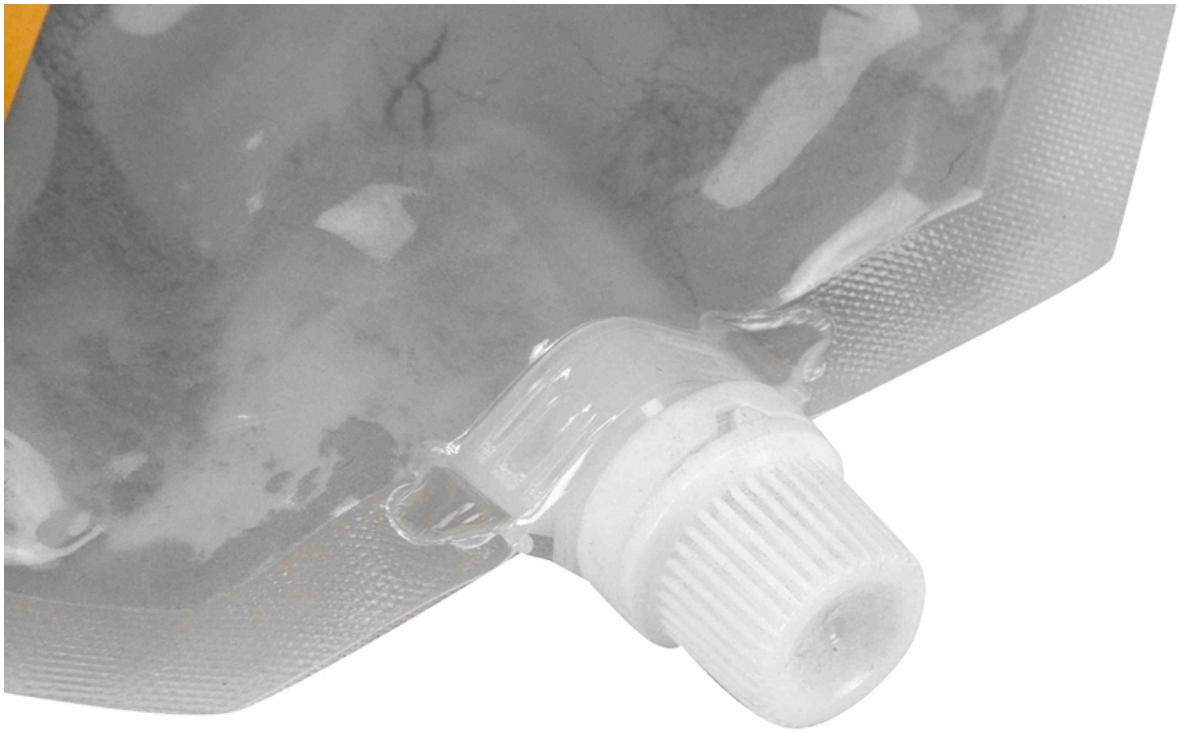

CHICO-SPB-5OZ

Product ID: 263890

Export Control Classification Number (ECCN): EAR99

Links (Click on the below items to view):

- **Operations Manual**
- **HigResPic1**
- **HigResPic2**
- **HigResPic3**
- **ISO 9001 Certification**
- **Business Certificate**
- **Shipping Time Map**