


IND-LLP-UVC-KT.MD-R1-120V

Medical Exam Room UV Disinfection Package for Doctor's Offices

Product ID: 267595

Please see last page for supporting documentation for this product(certificates, CAD files & drawings, IES files, wiring diagrams, etc).

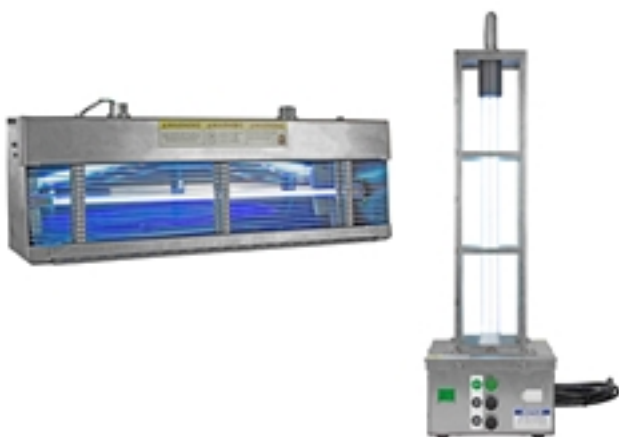

Larson Electronics LLC manufactures a wide variety of products, including custom built to spec designs. The pictures displayed for this unit are a general representation of form factor for the product line and may not accurately represent this exact configuration in every detail due to custom builds and changes between similar products in our standard catalog. The specifics for this configuration are listed in the specification table and supporting documentation (CAD files, Dimensional Drawing, Name Plate Diagram, Wiring Diagram, etc.). This means that specific details (receptacles, plugs, wires, connections, mounting brackets, external finishes, etc.) may not be accurately represented in images vs specifications. Please review specifications and do not order based solely on images.

IND-LLP-UVC-KT.MD-R1-120V Medical Office UV Disinfection Package

IND-AH-UVC-LF-24-SF-WLM-120V Indirect UV Air Disinfection Fixture

Lamp Technology: UV-C Fluorescent

Dimensions: 24.00"L x 4.50"W x 7.875"H

Weight: 16 lb

Voltage: 120 V AC, 50/60 Hz

Total Watts: 20W

Total UV Output: 7.5W

Expected Lifespan: 8,000+ Hours

UV Wavelength: 254nm

Lamp Base: Medium Bi-Pin

Replacement Lamp: -

Beam Angle: 180°

Light Configuration: Flood

Amps: -

Ambient Operating Temp Range: -

Materials: 304 Stainless Steel Enclosure

Front Panel: Louvers

Mounting: Wall Mount

Disinfection Fixture - Ratings/Features

T10 Bulb Shape

Short-wave Germicidal Light

Destroys Airborne Bacteria and Viruses

IND-SM-BX-24-1L-UVC-AT-120V-15C UV Sanitation Light

Lamp Technology: UV-C Fluorescent

Dimensions: -

Weight: -

Voltage: 120V AC

Total Watts: 55W

Total UV Output (Watts): 16.5W

UV Sanitation Light - Ratings/Features

Short-wave Germicidal Light

Total UV Irradiance: 156 uW/cm2
Coverage: 15' x 15' Area
Luminous Efficacy: -
Expected Lifespan: 8,000+ Hours
UV Wavelength: UV-C, 200nm - 280nm (254 nm)
CRI: -
Lamp Type: -
Lamp Base: -
Replacement Lamp: -
Beam Angle: 360°
Light Configuration: Flood
Power Efficiency: -
Power Factor: -
Amps: 0.48A @ 120V
Ambient Operating Temp Range: -
Materials: -
Lens Material: -
Mounting: Top-located Carrying Handle
Wiring: 15' 16/3 SOOW Cord w/ Cord Cap
Cord Cap: 5-15 Straight, L5-15 Twist or Pigtail

PLEASE NOTE: UV-C light can cause temporary or permanent loss of vision, and temporary acute redness or ulceration (mild to severe sunburn) to exposed skin. To prevent exposure, do not operate the device in any application that allows UV-C light to be visible during operation. NEVER LOOK DIRECTLY AT THE BULB OR DISINFECTING TARGET ZONE. DO NOT touch bulb with bare hands. The oils in your skin will damage the lamp. Fingerprints will result in reduced performance and significantly reduce the lifespan of the lamp unless they are removed with alcohol. Please read instruction manual for UV safety requirements before operating.

Special Orders - Special Requirements

Contact us for special requirements

Toll Free: 1-800-369-6671

Intl: 1-903-270-1187


Fax: 1-903-498-3364

E-mail: sales@larsonelectronics.com

Frequently Asked Questions (FAQ)





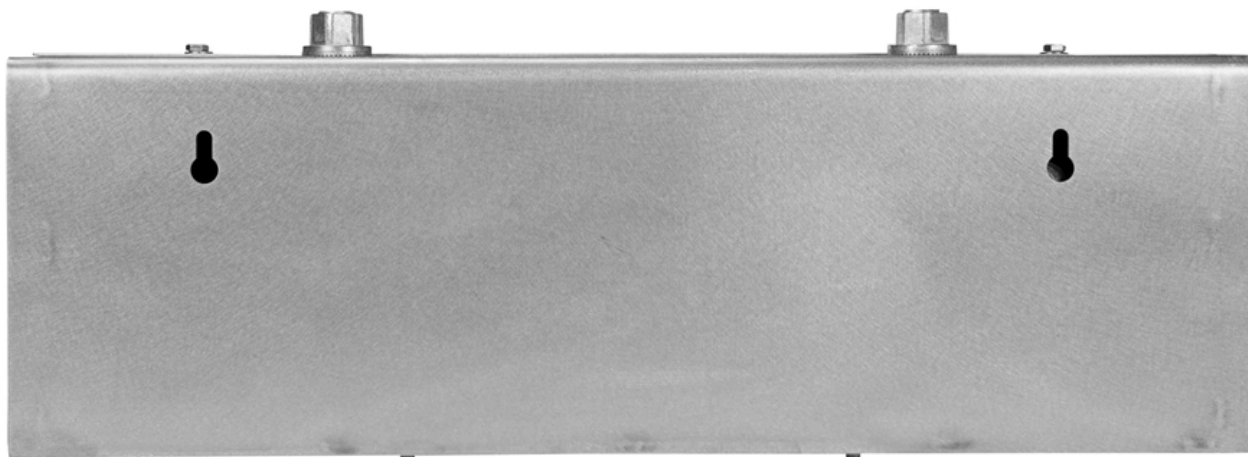

IND-LLP-UVC-KT.MD-R1-120V

Product ID: 267595

Export Control Classification Number (ECCN): EAR99

Options:

IND-LLP-UVC-KT.MD-R1-120V-Cord Cap

Example: IND-LLP-UVC-KT.MD-R1-120V-5.15

Cord Cap	
5-15 STRAIGHT	-5.15
L5-15 TWIST	-L5.15
PIGTAIL	-Pigtail

Links (Click on the below items to view):

- [Beam Information \(Coverage, Datafile\)](#)
- [Eye Safety Information/Certificate](#)
- [Lighting Facts & Information](#)
- [Operations Manual](#)
- [Spectrum Curve \(Wavelength Graph\)](#)
- [HigResPic1](#)
- [HigResPic2](#)
- [HigResPic3](#)
- [HigResPic4](#)
- [Video1](#)
- [Video4](#)
- [ISO 9001 Certification](#)
- [Business Certificate](#)
- [Shipping Time Map](#)