Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.498.3364

IND-AH-UVC-DF-24-SF-PND-50C-120V

Indirect UV Air Disinfection Dual Lamp Fixture - UV-C - Destroys Airborne Bacteria & Viruses - 120V - 15W Total UV Output - Pendant Mount - 50' Cord w/ Cord Cap

Product ID: 268044

Please see last page for supporting documentation for this product(certificates, CAD files & drawings, IES files, wiring diagrams, etc).



Larson Electronics LLC manufactures a wide variety of products, including custom built to spec designs. The pictures displayed for this unit are a general representation of form factor for the product line and may not accurately represent this exact configuration in every detail due to custom builds and changes between similar products in our standard catalog. The specifics for this configuration are listed in the specification table and supporting documentation (CAD files, Dimensional Drawing, Name Plate Diagram, Wiring Diagram, etc.). This means that specific details (receptacles, plugs, wires, connections, mounting brackets, external finishes, etc.) may not be accurately represented in images vs specifications. Please review specifications and do not order based solely on images.

This unit is Made In USA - Manufactured in Texas

IND-AH-UVC-DF-24-SF-PND-50C-120V Indirect UV Air Disinfection Fixture

Lamp Technology: UV-C Fluorescent
Dimensions: 24.00"L x 9.00"W x 7.875"H
Weight: 32 lb
Voltage: 120 V AC, 50/60 Hz
Total Watts: 40W (20W Each Lamp)
Total UV Output: 15W
Directional UV Output: 7.5W from Left Side; 7.5W from Right Side
Expected Lifespan: 8,000+ Hours
UV Wavelength: 254nm
Lamp Base: Medium Bi-Pin
Replacement Lamp: -
Beam Angle: 180º
Light Configuration: Flood
Amps: -
Ambient Operating Temp Range: -
Materials: 304 Stainless Steel Enclosure
Front Panel: Louvers
Mounting: Pendant Mount
Wiring: 50' 16/3 SOOW Cord w/ Cord Cap
Cord Cap: 5-15, 5-20, L5-15, L5-20, or Pigtail

Ratings/Features

T10 Bulb Shape
Short-wave Germicidal Light
Destroys Airborne Bacteria and Viruses
EPA Reg. No 98409-1
EPA Est. No. 98409-TX-1

Special Orders - Special Requirements

Contact us for special requirements

Toll Free: 1-800-369-6671
Intl: 1-903-270-1187
Fax: 1-903-498-3364
E-mail: sales@larsonelectronics.com

Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.498.3364

PLEASE NOTE: UV-C light can cause temporary or permanent loss of vision, and temporary acute redness or ulceration (mild to severe sunburn) to exposed skin. To prevent exposure, do not operate the device in any application that allows UV-C light to be visible during operation. NEVER LOOK DIRECTLY AT THE BULB OR DISINFECTING TARGET ZONE. DO NOT touch bulb with bare hands. The oils in your skin will damage the lamp. Fingerprints will result in reduced performance and significantly reduce the lifespan of the lamp unless they are removed with alcohol. Please read instruction manual for UV safety requirements before operating.

This unit is Made In USA - Manufactured in Texas

The IND-AH-UVC-DF-24-SF-PND-50C-120V from Larson Electronics is an Indirect Ultraviolet Air Disinfection Fixture that works to disinfect the upper room air of occupied spaces via germicidal ultraviolet (UV) rays. This unit helps to reduce the risk of cross infection and minimizes the exposure of occupants to infectious airborne microbes. This stainless steel air disinfection unit features a pair 20 watt UV bulbs that each produce 7.5 watts of UV output at a wavelength of 254nm. The IND-AH-UVC-DF-24-SF-PND-50C-120V is a pendant mounted unit and operates on 120 V AC current.

Please note: This product produces UV light. Make sure to follow all safety guidelines and protocols found in the user manual. UVC light in the proper setting kills up to 99.9% of viruses, mold, spores and bacteria. Click here to learn more about UVC and the corona virus*

The IND-AH-UVC-DF-24-SF-PND-50C-120V is a powerful sanitation solution for industrial sites and commercial facilities. Equipped with a pair UVC fluorescent lamps, this system offers 7.5 watts of UV output at a wavelength of 254nm from each side of the unit. The lights have an expected lifespan of 8,000+ hours and emit a flood beam pattern. The IND-AH-UVC-DF-24-SF-PND-50C-120V can be used continuously in occupied areas such as restaurants, public spaces, and office buildings.

Operation: This indirect UV air disinfection fixture projects ultraviolet rays across the top of the room it is mounted in. The upper air in the room that passes through the UV rays via convection currents or forced air circulation is then sanitized. Bacteria and viruses present in the air that passes through the UV rays produced by the fixture are destroyed. The air in the room is constantly being purified as it flows through the UV rays being produced by the fixture. The IND-AH-UVC-DF-24-SF-PND-50C-120V is capable of disinfecting the air within an area nine feet wide and 16.25 feet long from the front of the unit.

Construction: The enclosure of the IND-AH-UVC-DF-24-SF-PND-50C-120V is built from 304 stainless steel. A series of front mounted louvers protects people from harmful UV light as well as maximizing the amount of UV rays that are projected across the upper air of the room. A parabolic reflectors with specular aluminum inserts directs as much light from the bulb out of the unit as possible.

Click Photos to Enlarge



5-15 Straight Blade Plug
15 Amp / 125V Rated



L5-15 Twist Lock Plug
15 Amp / 125V Rated



Flying Leads / Pigtail Wires

Wiring/Plug: This indirect UV air disinfection fixture is equipped with 50 feet of 16/3 chemical and abrasion resistant SOOW cord that is fitted with an industrial grade cord cap for easy connection to common wall outlets. Plug options include standard 5-15 15 amp straight blade plug for 110V wall outlets with ground, NEMA L5-15 15 amp twist lock plug for 125V twist lock outlets, standard 5-20 20 amp

straight blade plug for 110V wall outlets with ground or or NEMA L5-20 20 amp twist lock plug for 125V twist lock outlets. Alternatively, we can provide flying leads with no plugfor hard wire applications or for operators who prefer to wire in user provided cord caps. Please choose pigtail option below for flying leads with no plug.

Mounting: The IND-AH-UVC-DF-24-SF-PND-50C-120V is designed to be pendant mounted. Two conduit holes on the top of the enclosure allow for pendant mounting from a flat and level surface. The surface mount pendant adaptor plate and 1/2" conduit hubs are included. The mounting surface must be able to support 32 lb of weight. **The IND-AH-UVC-DF-24-SF-PND-50C-120V does not come with conduit. Customer provides their own conduit to complete the mounting process.**

Note on Environment: Sunlight and visible light fixtures do not impact the effectiveness of the disinfecting on this UVC sanitation product. Metal halide, high pressure sodium, fluorescent, and LED light fixtures can be left on. The UV radiation emitted from this product is not disrupted by any type of lighting in the environment. Put simply, NO it DOES NOT need to be dark in the area you plan to disinfect. The UV radiation is harmful to the eyes and skin, and that is why you should not be in the area while it is in operation. Please see user manual for additional safety information.

Applications: This ultraviolet indirect UV air disinfection unit can be used to continuously disinfect air of mold, allergens, airborne bacteria, viruses, and germs. The IND-AH-UVC-DF-24-SF-PND-50C-120V is ideal for use in restaurants, hospitals, clinics, laboratories, nursing homes, schools, food processing facilities, office buildings, conference rooms, universities, clean rooms, and many more. Larson Electronics is a manufacturer and as such can build stationary and portable transformer systems to your specifications. Although we carry several models of power distribution transformer systems, we can deliver custom ordered units almost as quickly as our prebuilt units. If this model does not meet your needs, please contact us at 1-800-369-6671 or sales@larsonelectronics.com to discuss your specific requirements.


Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.498.3364

Frequently Asked Questions (FAQ)

Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.498.3364

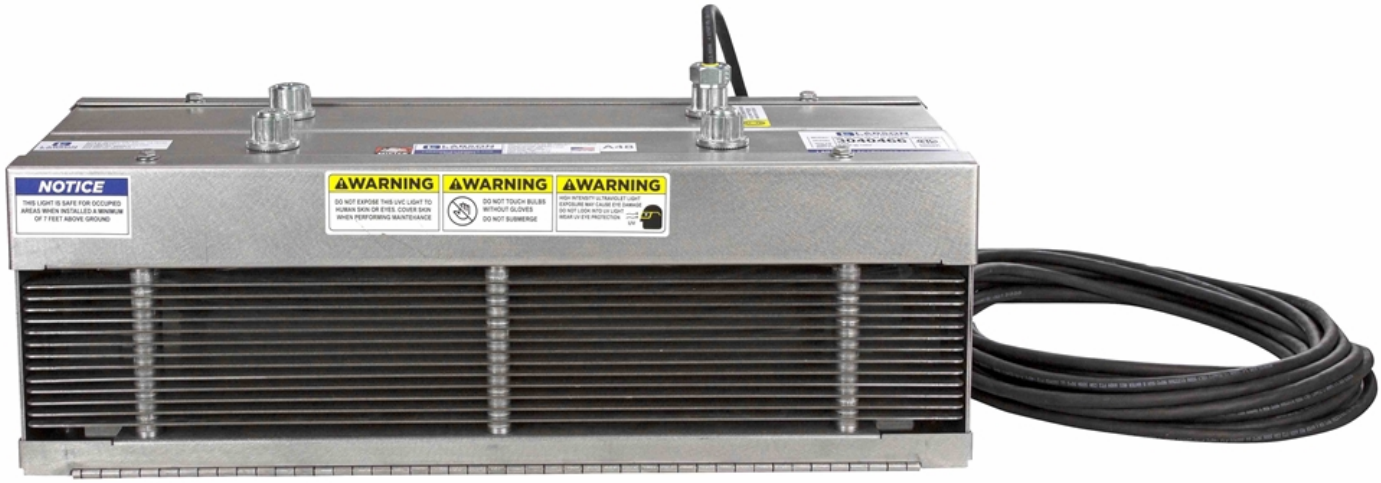

Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671


www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.498.3364





Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.498.3364

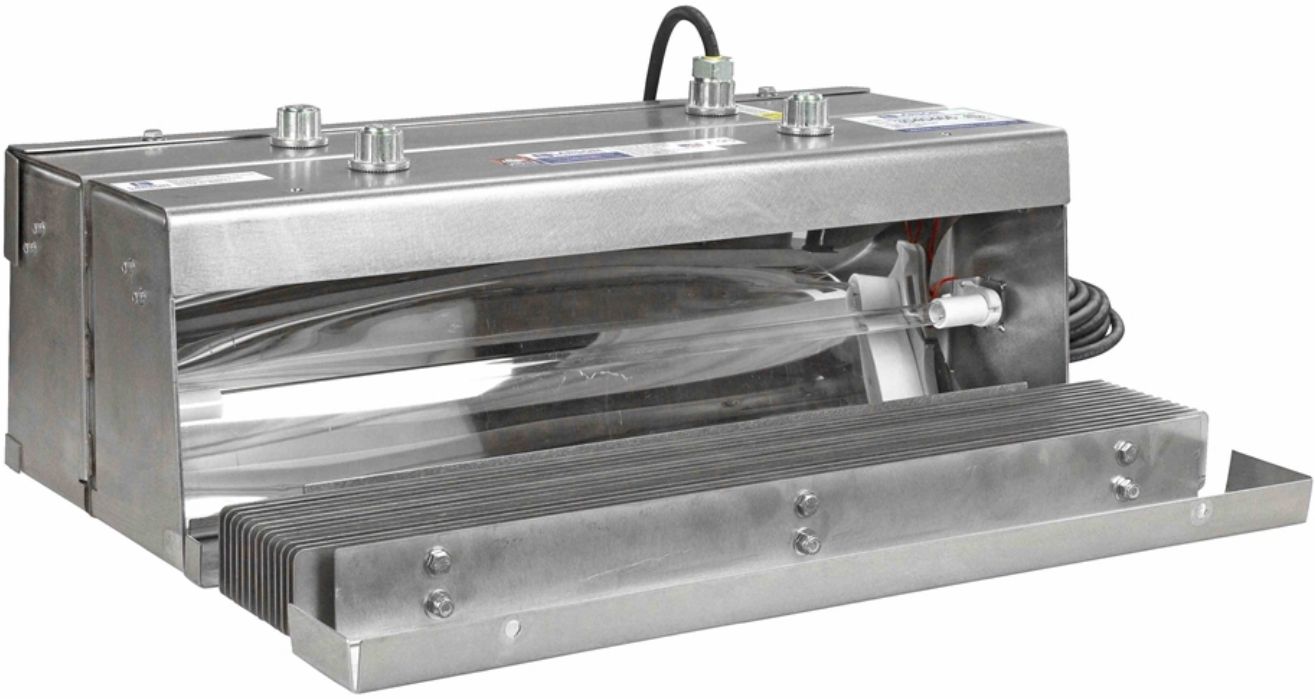

Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.498.3364

IND-AH-UVC-DF-24-SF-PND-50C-120V

Product ID: 268044

Export Control Classification Number (ECCN): EAR99

Options:

IND-AH-UVC-DF-24-SF-PND-50C-120V-Cord Cap

Example: IND-AH-UVC-DF-24-SF-PND-50C-120V-5.15

Cord Cap	
5-15 STRAIGHT	-5.15
5-20 STRAIGHT	-5.20
L5-15 TWIST	-L5.15
L5-20 TWIST	-L5.20
PIGTAIL	-Pigtail

Links (Click on the below items to view):

- Canadian CEC Certificate (Commonly referred to as CSA Certificate)
- Catalog Page - Product Series
- Certificate 1, Misc
- Certificate 4, Misc
- Eye Safety Information/Certificate
- Lighting Facts & Information
- Lighting Study (Layout) Example 1
- MSDS (Material Safety Data Sheet
- Operations Manual
- SpecSheetArabic
- SpecSheetFrench
- Spectrum Curve (Wavelength Graph)
- USA NEC Certificate (Commonly referred to as UL Certificate)
- Wiring Diagram (Oneline)
- HigResPic1
- HigResPic2
- HigResPic3
- HigResPic4
- HigResPic5
- HigResPic6
- HigResPic7
- HigResPic8
- Video1
- Video2
- Video3
- Video4
- ISO 9001 Certification
- Business Certificate
- Shipping Time Map