

EPL-SLSW-MS-XS

Explosion Proof Selector Switch - 20 Amps - Rotary, Momentary Spring Return Switch - N4X

Product ID: 270701

Please see last page for supporting documentation for this product(certificates, CAD files & drawings, IES files, wiring diagrams, etc).



Larson Electronics LLC manufactures a wide variety of products, including custom built to spec designs. The pictures displayed for this unit are a general representation of form factor for the product line and may not accurately represent this exact configuration in every detail due to custom builds and changes between similar products in our standard catalog. The specifics for this configuration are listed in the specification table and supporting documentation (CAD files, Dimensional Drawing, Name Plate Diagram, Wiring Diagram, etc.). This means that specific details (receptacles, plugs, wires, connections, mounting brackets, external finishes, etc.) may not be accurately represented in images vs specifications. Please review specifications and do not order based solely on images.

EPL-SLSW-MS-XS Rotary Switch

Listing: NRTL Listed for United States, Canada, Europe, International

Unit Type: Explosion Proof Selector Switch

Dimensions: 4.2" x 1.8" x 1.8"

Weight: 0.35 lbs

Voltage Rating: -

Frequency: 50/60 Hz

Poles: 2P

Amp Rating: 20A

Switch Type: Double Throw, Momentary Spring Return Rotary

Positions: 2

Ambient Operating Temp: -50°C to +60°C

Materials: Aluminum and Stainless Steel

Mount: Surface/Panel

Wiring: Terminal Blocks

Body: 3/4"-14 NPSM Threaded

Ratings/Approvals

Class I, Divisions 1&2 Groups B,C,D

Class II, Divisions 1&2 Groups E,F,G

Class III

ATEX/IECEX Rated

Zones 1 & 2

Zones 21 & 22

NEMA 4X

Special Orders - Special Requirements

Contact us for special requirements

Toll Free: 1-800-369-6671

Intl: 1-903-270-1187

Fax: 1-903-498-3364

E-mail: sales@larsonelectronics.com

The EPL-SLSW-MS-XS from Larson Electronics is an Explosion Proof Selector Switch that is suitable for preventing the ignition of external, flammable atmospheres in combustible sites. This 2-pole unit features a short barrel, threaded design for installation in thick panels. The explosion proof device comes with terminal blocks for wiring connections. The EPL-SLSW-MS-XS is rated for Class I, II and III, as well as ATEX/IECEX rated facilities. This 2-pole unit features a double throw configuration with momentary

spring return rotary action. Equipped with two positions, the device is rated at 20 amps. This NEMA 4X rated selector switch features a 3/4"-14 NPSM threaded body. For protection in hazardous locations, the explosion proof device is constructed of aluminum and stainless steel. The unit features terminal blocks for wiring connections.

Mounting: This switch is compatible with panel or surface mounting applications.


Applications: Chemical processing facilities, food processing plants, oil refineries, agricultural sites, grain storage facilities, metal processing and more.

At Larson Electronics, we do more than meet your lighting needs. We also provide replacement, retrofit, and upgrade parts as well as industrial grade power accessories. Our craftsmen can custom build any lighting system and/or accessories to fit the unique demands of your operation. A commitment to honesty, quality, and dependability has made Larson Electronics a leader in the lighting and electronics business since 1973. Contact us today at 800-369-6671 or message sales@larsonelectronics.com for more information about our custom options tailored to meet your specific industry needs.

Frequently Asked Questions (FAQ)





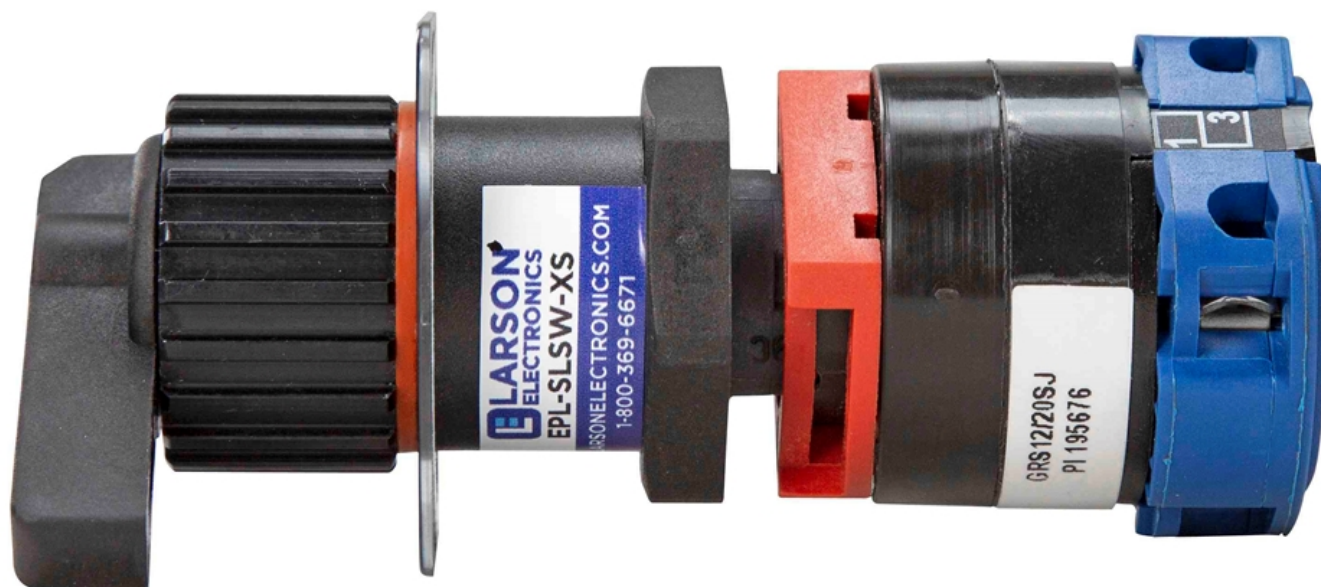



EPL-SLSW-MS-XS

Product ID: 270701

Export Control Classification Number (ECCN): EAR99

Options:

EPL-SLSW-MS-XS-Contacts

Example: EPL-SLSW-MS-XS-NO

Contacts	
NORMALLY OPEN	-NO
NORMALLY CLOSED	-NC
NORMALLY OPEN/CLOSED	-NO.NC

Links (Click on the below items to view):

- [HigResPic1](#)
- [HigResPic2](#)
- [HigResPic3](#)
- [HigResPic4](#)
- [HigResPic5](#)
- [HigResPic6](#)
- [HigResPic7](#)
- [ISO 9001 Certification](#)
- [Business Certificate](#)
- [Shipping Time Map](#)