Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.498.3364

GAU-HB-60L-LED-WP-TAA-M1

300W High Bay LED Fixture - 480V AC, 50/60Hz - Aluminum - Cold Forged Housing - IP66 - 45,000 Lumens

Product ID: 272498

Please see last page for supporting documentation for this product(certificates, CAD files & drawings, IES files, wiring diagrams, etc).



Larson Electronics LLC manufactures a wide variety of products, including custom built to spec designs. The pictures displayed for this unit are a general representation of form factor for the product line and may not accurately represent this exact configuration in every detail due to custom builds and changes between similar products in our standard catalog. The specifics for this configuration are listed in the specification table and supporting documentation (CAD files, Dimensional Drawing, Name Plate Diagram, Wiring Diagram, etc.). This means that specific details (receptacles, plugs, wires, connections, mounting brackets, external finishes, etc.) may not be accurately represented in images vs specifications. Please review specifications and do not order based solely on images.

GAU-HB-60L-LED-WP-TAA-M1 High Bay LED Lamp

Lamp Type: LED
Dimensions: 6.77"H x 18" Outside Diameter (OD)
Weight: 5.24 lb
Voltage: Single Phase 480 V AC, 50/60 Hz
Watts: 300 W
Lumens: 45,000
Luminous Efficacy: 150 Lm/W
Lamp Life Expectancy: 50,000+ Hours
Color Temp: 3,000K; 4,000K; 5,000K; or 5,700K
CRI: >80
Beam Angle: 90°
Power Factor: >0.95
Housing Material: Aluminum
Lens Material: Acrylic (PC)
Mounting: Hook, Bracket and Pipe
Color: Black

Ratings/Approvals

IP65
Cold Forged
180° Rotation
TAA Compliant
USA Assembly

Special Orders - Special Requirements

Contact us for special requirements

Toll Free: 1-800-369-6671
Intl: 1-903-270-1187
E-mail: sales@larsonelectronics.com

The GAU-HB-60L-LED-WP-TAA-M1 from Larson Electronics is a High Bay LED Fixture that is designed for industrial work sites and elevated lighting requirements. The 300-watt

fixture operates on 480V AC, 50/60 Hz and emits 45,000 lumens of white light during use. Made out of aluminum with an acrylic lens, the unit caters to Hook, Bracket and Pipe mounting configurations.

The GAU-HB-60L-LED-WP-TAA-M1 is a powerful lighting solution for large, industrial spaces. The high bay LED lamp operates on single phase 480V AC, 50/60 Hz and consumes 300 watts during operation. The circular fixture emits 45,000 lumens of white light. Color temperature options include: 3,000 K; 4,000 K; 5,000 K; or 5,700 K. The unit was made using cold forging, which enhances the thermal resistance features of the lamp, with a beam angle of 90°.

This high bay LED light is constructed of aluminum with an acrylic (PC) lens. The IP65-rated fixture is suitable for outdoor and humid environments. Consisting of 119 LED chips, the lamp should be mounted in elevated positions for best results.

LED Benefits: Unlike gas burning and arc type lamps that have glass bulbs, LEDs have no filaments or fragile housings to break during operation and/or transportation. Instead of heating a small filament or using a combination of gases to produce light, light emitting diodes (LEDs) use semi-conductive materials that illuminate when electric current is applied, providing instant illumination with no warm up or cool down time before re-striking. Because there is no warm up period, this light can be cycled on and off with no reduction in lamp life.

LED lights run at significantly cooler temperatures than traditional metal halide and high pressure sodium lights and contain no harmful gases, vapors, or mercury, making them both safer and more energy efficient. No extra energy is wasted in cooling enclosed work areas due to external heat emissions from bulb type lights, and the operator risks associated with traditional lighting methods, such as accidental burns and exposure to hazardous substances contained in the glass bulbs, are eliminated. In addition, LEDs are also safer for the environment as they are 100% recyclable, which eliminates the need for costly special disposal services required with traditional gas burning and arc type lamps.

Mounting: The GAU-HB-60L-LED-WP-TAA-M1 features a variety of mounting options: Hook, Bracket and Pipe. For hook mounting configurations, the LED fixture can hang suspended in the air, via a small eyelet located at the back of the unit. When secured using a mounting bracket, the configuration offers 180° of rotation. Pipe mounting configurations are suitable for sturdy support in overhead positions.


Suggested Applications: Outdoor lighting, wet locations, retail spaces, lobbies, commercial locations, industrial parks, schools, public transportation hubs, airports, office buildings, medical centers and more.

At Larson Electronics, we do more than meet your lighting needs. We also provide replacement, retrofit, and upgrade parts as well as industrial grade power accessories. Our craftsmen can custom build any lighting system and/or accessories to fit the unique demands of your operation. A commitment to honesty, quality, and dependability has made Larson Electronics a leader in the lighting and electronics business since 1973. Contact us today at 800-369-6671 or message sales@larsonelectronics.com for more information about our custom options tailored to meet your specific industry needs.

Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.498.3364

Frequently Asked Questions (FAQ)

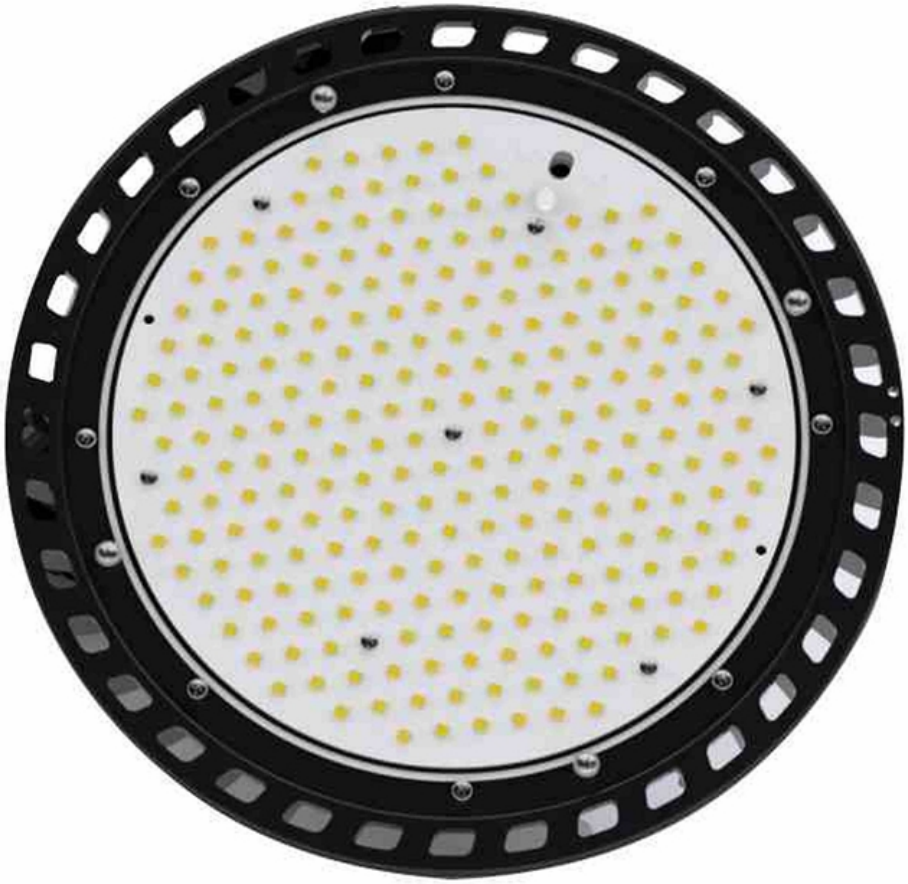





Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.498.3364

GAU-HB-60L-LED-WP-TAA-M1

Product ID: 272498

Harmonized System (HS) Code: 9405.41.84.10

Export Control Classification Number (ECCN): EAR99

Options:

GAU-HB-60L-LED-WP-TAA-M1-Beam Config-Color Temp

Example: GAU-HB-60L-LED-WP-TAA-M1-60DB-3K

Beam Config	
60°	-60DB
90°	-90DB
120°	-120DB

Color Temp	
3000K	-3K
4000K	-4K
5000K	-5K
5700K	-5.7K

Links (Click on the below items to view):

- **HigResPic1**
- **HigResPic2**
- **HigResPic3**
- **HigResPic4**
- **ISO 9001 Certification**
- **Business Certificate**
- **Shipping Time Map**