Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.498.3364

LM-25-3S-EW-4X300LTL-LED-TLR10-120V

1200W LED 3-Stage Light Tower - 12' to 25' Mast - 150,000 Lumens - 10' Trailer - 120V AC

Product ID: 276982

Please see last page for supporting documentation for this product(certificates, CAD files & drawings, IES files, wiring diagrams, etc).



Larson Electronics LLC manufactures a wide variety of products, including custom built to spec designs. The pictures displayed for this unit are a general representation of form factor for the product line and may not accurately represent this exact configuration in every detail due to custom builds and changes between similar products in our standard catalog. The specifics for this configuration are listed in the specification table and supporting documentation (CAD files, Dimensional Drawing, Name Plate Diagram, Wiring Diagram, etc.). This means that specific details (receptacles, plugs, wires, connections, mounting brackets, external finishes, etc.) may not be accurately represented in images vs specifications. Please review specifications and do not order based solely on images.

LM-25-3S-EW-4X300LTL-LED-TLR10-120V Trailer Mounted LED Light Plant
Lamp Type: Cree® LED
Lamps: (4) 300 Watt LED Fixtures
Total Watts: 1,200 (300W per lamp)
Total Lumens: 150,000 (37,500 per lamp)
Luminous Efficiency: 125 Lm/W
LED Life Expectancy: 80,000 hours
Optics Efficiency: 98% - PMMA High Transmittance Optics
Led Drive %: 90%
Lighting Configuration: Flood Pattern
Color Temp: 6000K
Ambient Temp Rating: -40°C to +80°C
Power Factor: >97%
Lamp Voltage: Universal 120-277V AC, 50/60 Hz
Lamp Control: Individual Switches per Light Head
Mast Length: 12 feet - 25 feet
Weight: ~600 lb
Materials: Steel
Finish: Powder Coated - Gloss Blue
Voltage: 120 V AC, 50/60 Hz
Operation: (2) 3,000 lb Electric Winches
Cable: 3/16 Aircraft Grade Galvanized Steel Cable
Mounting: 1/4" Thick, 13"x15" Six Bolt Hole Bracket
Wiring: 25' 12/3 SOOW Cable w/ Cord Cap from Base of Mast
Cord Cap: L5-30P

Trailer Specs

Mast Summary
12' to 25' Foot Light Mast
Steel Construction
Power Coated Finish
Removable Mast Head
125 mph Wind Resistance
Manual or Optional Electric Operation

LED Lamp Head Summary
High Output LED Lamps
Extreme Area Coverage
Direct Replacement for (4) 1000W MH Towers
1,200W LED compared to 4000W MH
150,000 Total Lumen Output
Independently Adjustable Light Heads
Independently Switched Light Heads
Dial-in Adjustability per light head
98% Transmission High Purity PMMA Optics
Multiple LED Banks for Heat Dispersion
135 Lumens Per Watt Efficiency
70% Lumen Retention after 80,000 Hours
IP67 Waterproof LED Fixtures

Trailer Summary
10' x 6.5' Trailer Bed
3,500 lb Suspension
15" Trailer Tires

Materials: Steel

Trailer Dimensions: 10'-L x 6.5'-W Trailer Bed

Hitch: 2" Ball Coupler

Wiring: 7-Pin Flat

Axle: 3,500 lb

Suspension: 3,500 lb 4-Leaf Double Eye Springs

Outriggers: (4) 1,000 lb Manual Crack Leveling Jacks - Retractable

Wheels: (2) 15" 5x4.5 Steel Rims

Tires: ST205/75/D15 H188

Shipping Weight: ~1600 lb

Shipping: Common Freight

Options: Length - Mounting - Fixtures / Call Us for Special Requirements

(4) 1,000 lb Retractable Outriggers

Special Orders - Special Requirements

Contact us for special requirements

Toll Free: 1-800-369-6671

Intl: 1-903-270-1187

Fax: 1-903-498-3364

E-mail: sales@larsonelectronics.com

Made in the USA

The LM-25-3S-EW-4X300LTL-LED-TLR10-120V from Larson Electronics is a Trailer Mounted Fold Over Light Mast that provides a safe and effective way for operators to quickly deploy 1,200 watts of intense LED lighting to elevations up to twenty-five feet. Four 300 watt high output LED lights produce a wide spread of intense white light, allowing this unit to effectively cover large work areas with high quality illumination. This light tower folds over for easy transportation, features a rotating boom that allows for 360° of rotation, a removable mast head for storing mounted equipment when not in use and operates on 120 V AC, 50/60 Hz via 25` of 12/3 SOOW cable from the base of the mast that is terminated in a L5-30P plug.

PLEASE NOTE: ANY FREE SHIPPING OFFERS DO NOT APPLY TO LIGHT MASTS OR LIGHT TOWERS

The LM-25-3S-EW-4X300LTL-LED-TLR10-120V trailer mounted 1,200 watt telescoping steel light mast with 300 watt LED light heads from Larson Electronics is designed to quickly and safely deploy 1,200 watts of intense LED lighting in locations where elevated illumination is needed for maximum area coverage. The telescoping three stage steel light mast on the LM-25-3S-EW-4X300LTL-LED-TLR10-120V from Larson Electronics is designed to allow operators to quickly and safely deploy lighting in locations where this equipment must be elevated to heights up to 25` for effective coverage. This light boom can be extended to 25` for maximum area coverage and collapsed to 12` for applications where a smaller footprint is required. The tower is constructed of square steel tubing with a lower section 12 feet in length and 4 inches in diameter, middle section 10 feet in length and 3.5 inches in diameter, and an upper section 7 feet in length and 3 inches in diameter. Each section has 2 foot of overlap. The mast is elevated using an included 3,000 lb electric winch with 3/16" galvenized steel cable and extended to its full height using a second 3,000 lb electric winch.

LED Benefits: Unlike gas burning and arc type lamps that have glass bulbs, LEDs have no filaments or fragile housings to break during operation and/or transportation. Instead of heating a small filament or using a combination of gases to produce light, light emitting diodes (LEDs) use semi-conductive materials that illuminate when electric current is applied, providing instant illumination with no warm up or cool down time before re-striking. Because there is no warm up period, this light can be cycled on and off with no reduction in lamp life.

LED lights run at significantly cooler temperatures than traditional metal halide and high pressure sodium lights and contain no harmful gases, vapors, or mercury, making them both safer and more energy efficient. No extra energy is wasted in cooling enclosed work areas due to external heat emissions from bulb type lights, and the operator risks associated with traditional lighting methods, such as accidental burns and exposure to hazardous substances contained in the glass bulbs, are eliminated. In addition, LEDs are also safer for the environment as they are 100% recyclable, which eliminates the need for costly special disposal services required with traditional gas burning and arc type lamps.

Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.498.3364



Click Image to Enlarge




Click Image to Enlarge



Click Image to Enlarge








Lights: The lighting system on this articulating light mast is comprised of four 300 watt LED lamps producing 37,500 lumens of light each attached to the end of the telescoping pneumatic light boom. These floodlights produce a wide flood light pattern with a combined total of 1,200 watts and 150,000 lumens of light. The LED lights are ideal replacements for fragile and hot running 1000 watt metal halide lamps, offering increased durability, longer lamp life, and lower power consumption. The entire lighting assembly is connected to the power source via a 4-switch control box. Each light head is on an individual circuit and can be powered on or off independently of the other light fixtures.

Heat Management: Heat is the single largest factor in premature LED failure and color shifting. These LED units feature individual heat sinks per bank of six LEDs to control heat buildup rather than utilizing a single housing to dissipate heat. This allows for more thorough cooling of the LEDs for extended operating periods. This allows the LEDs to be driven at up to 90% capacity without overheating or visible loss of light output. The end result is more light with less heat and longer LED life with an average 70% lumen maintenance after 80,000 hours. In addition, should an LED failure occur, these LED flood lights are field serviceable. Each bank of six LEDs can be replaced with the fixture installed. This allows for the tower to stay in operation until repairs can take place, and eliminates the need to remove and disassemble the entire fixture for repairs.

Durability: As well as unparalleled heat control, LED lights from Larson Electronics also offer IP67 rated construction that is designed to withstand extremes of environmental and operating conditions. These units can withstand rapid temperature changes of -40° Celsius to +80° Celsius, are waterproof, and resist ingress of dust, dirt and humidity. The housings are formed from die cast aluminum and the optics are high transmission PMMA with 98% light transmittance. The Cree® LEDs help these units achieve resistance to vibrations and are rated at 70% lumen maintenance after 80,000 hours of use. We use these LED lights for applications where a lot of vibration, dust, dirt, dampness and abusive working conditions are encountered.

Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.498.3364

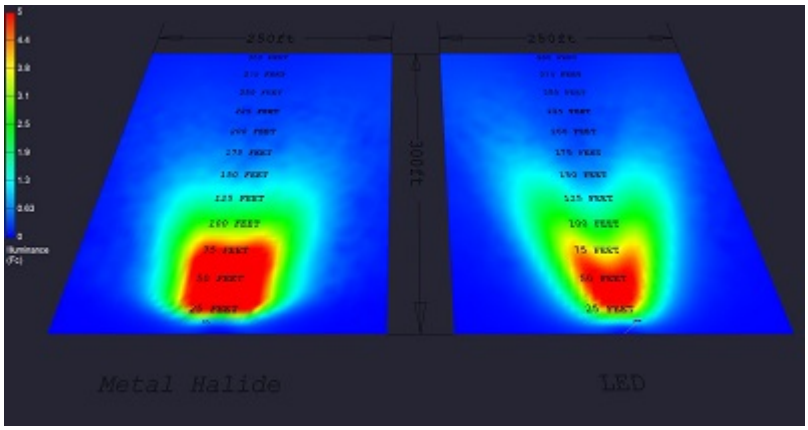

Click Photo to Enlarge


The above image shows the comparison of the traditional 4000 watt metal halide light plant such as our LM-25-3S-4X1000W (left) to the LM-25-3S-EW-4X300LTL-LED-TLR10-120V LED light tower. The area being illuminated by each tower is 300` in length and 250` in width. Unlike the metal halide light plant, there are no hot spots with the LED plant. This high output LED light plant provides an even beam spread over the targeted work area without overcast, glare, light spillage, and wasted illumination. Color rendering is also increased with LED light plants, providing a more realistic night vision that more closely resembles natural daylight illumination.

Each floodlight is securely fastened to the mast head with an innovative trunnion style stainless steel mounting bracket that allows the light to be adjusted through 180° of vertical movement. The LED light head is secured to the mounting bracket with shock dampening rotating inserts. The insert provides precision aiming down to 1° while providing increased longevity to the LED fixture. To vertically adjust the unit after mounting, the user simply loosens the screws located on either side of the unit, moves it into the desired position, then re-tightens the screws. The base of the mounting trunnion is equipped with several machined slots which allow users to utilize existing mounting holes and slide the unit for precise mount positioning.




Retractable outriggers with 1,000 lb manual crank jacks and tail lights.

Click Image to Enlarge



Manual 1,000 lb hand crank winch for elevating and folding over the light mast on the LM-30-3S-TLR.

Click Image to Enlarge



Mast support bracket for securing the mast boom in the fold-over position during transportation.

Click Image to Enlarge



Ready to Ship

Click Image to Enlarge

Click Image to Enlarge

The LM family of telescoping towers feature a proprietary mast guidance system, which provide increased stability during high winds. When lowered to 12 feet, the mast can withstand winds up to 125 mph. When elevated to its full upright position, the mast can be rotated a full 360°. By loosening the T-Handle, operators can rotate the mast with easy in either direction. The mast can be positioned in one of four different directions, and locked back in place by re-tightening the T-handle. The mast itself spins freely with easy, and can typically be rotated with a single hand.

The LM series of towers are powder coated with glossy blue finish for corrosion resistances and aesthetics. This light mast is mounted to a 10` by 6.5`, single axle trailer via six 1/2" anchor bolts. The two wheel trailer is equipped with 3,500 lb leaf springs and 15" trailer tires. The trailer can support and haul an additional 2,000 lb of equipment. A standard 2" ball coupling, two standard safety chains, and 4-pin flat trailer plug allow for easy hookup and towing.

Voltage: The drivers in this unit provide the ability to automatically monitor and adjust input current to maintain the correct LED voltage levels regardless of input levels across a specific range. This light tower operates on 120 V AC, 50/60 Hz. The ability to sense and adjust input current also provides protection against voltage spikes and drops that can occur in electrical systems which would otherwise result in burning up or premature LED failure without it.

Wiring and Plug: This LED trailer mounted light tower is equipped with 25 feet of 12/3 chemical and abrasion resistant SOOW cord that extends from the base of the mast and is terminated in a L5-30P cord cap.

Suggested Applications: With its easy deployment the LM-25-3S-EW-4X300LTL-LED-TLR10-120V is ideal for use in applications that require regular intensive cleaning and are exposed to a lot of vibration, dust, dirt, where abusive working conditions are encountered, temporary lighting, and construction sites

At Larson Electronics, we do more than meet your lighting needs. We also provide replacement, retrofit, and upgrade parts as well as industrial grade power accessories. Our craftsmen can custom build any lighting system and/or accessories to fit the unique demands of your operation. A commitment to honesty, quality, and dependability has made Larson Electronics a leader in the lighting and electronics business since 1973. Contact us today at 800-369-6671 or message sales@larsonelectronics.com for more information about our custom options tailored to meet your specific industry needs.

Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.498.3364

Frequently Asked Questions (FAQ)

LM-25-3S-EW-4X300LTL-LED-TLR10-120V

Product ID: 276982

Harmonized System (HS) Code: 9405.41.84.10

Export Control Classification Number (ECCN): EAR99

Links (Click on the below items to view):

- **HigResPic1**
- **Video1**
- **ISO 9001 Certification**
- **Business Certificate**
- **Shipping Time Map**