Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.765.7664

## HAL-PRM-LED-R3-1224-TRN

# 150W Hazardous Location Integrated Flood Light LED Fixture - C1D2, C2D1 - 12-24V AC/DC 50/60 Hz - 22,800 lms/Trunnion Mount - IP66/Field Serviceable

**Product ID: 277754**

**Please see last page for supporting documentation for this product (certificates, CAD files & drawings, IES files, wiring diagrams, etc).**



Image: HAL-PRM-LED-R3-1224-TRN

**Larson Electronics LLC manufactures a wide variety of products, including custom built to spec designs. The pictures displayed for this unit are a general representation of form factor for the product line and may not accurately represent this exact configuration in every detail due to custom builds and changes between similar products in our standard catalog. The specifics for this configuration are listed in the specification table and supporting documentation (CAD files, Dimensional Drawing, Name Plate Diagram, Wiring Diagram, etc.). This means that specific details (receptacles, plugs, wires, connections, mounting brackets, external finishes, etc.) may not be accurately represented in images vs specifications. Please review specifications and do not order based solely on images.**

**HAL-PRM-LED-R3-1224-TRN - Hazardous Location LED Fixture**

**Listing:** NRTL Listed to United States, Canada
**Lamp Technology:** LED
**Dimensions:** 12.6'"-L x 9.8"-W x 5.95"-H
**Weight:** -
**Voltage:** 12-24V AC/DC 50/60 Hz
**Total Watts:** 150W
**Total Lumens:** 22,800 lms
**Luminous Efficacy:** 152 Lm/w
**Lamp Life:** 75,000+ Hours
**LED Color Temperature:** 5000K, 4500K, 4000K, 3500K or 3000K
**Color Rendering Index:** -
**Lamp Type:** Integrated LED
**Lamp Base:** -
**Replacement Lamp:** -
**Beam Angle:** 24°, 60° or 90°
**Lighting Configuration:** Spot or Flood
**Power Efficiency:** >95%
**Power Factor:** 0.992
**Amps:** 12.5A @ 12V, 6.25A @ 24V

**Ratings/Approvals**

Class I, Division 2 Groups A, B, C and D
Class II, Division 1 Groups E, F and G
Class II, Division 2 Groups F and G
Class III, Divisions 1 & 2
NRTL Certified to UL 844 Ed. 13
NRTL Certified to UL 1598
NRTL Certified to C22.2 No. 137 Rev 2009
NRTL Certified to C22.2 No. 250.0
NRTL Certified to C22.2 No. 30-M-1986 Rev 2012
IEC 60529 Tested
IP66 Rated Waterproof
Replacement for Fluorescent Flood Light Fixtures
Field Serviceable

**Ambient Operating Temp Range:** -50°C to +65°C
**Operating Temp Rating:** T5
**Housing Material:** Copper Free Cast Aluminum (non sparking)
**Housing Finish:** Epoxy Powder Coated - Gray
**Lens Material:** Hardened Borosilicate Glass
**Gasket Material:** Silicone
**Mounting:** Trunnion Mount - Other Mounts Available
**Wiring Hub:** (1) 3/4" NPT

**Special Orders - Special Requirements**
Contact us for special requirements
**Toll Free:** 1-800-369-6671
**Intl:** 1-903-270-1187
**Fax:** 1-903-765-7664
**E-mail:** sales@larsonelectronics.com

**The Larson Electronics HAL-PRM-LED-R3-1224-TRN Hazardous Location Integrated Flood Light LED Fixture offers powerful lighting with heavy-duty and energy efficient benefits in Class I, Division 2 rated hazardous locations that contain combustible gases/vapors. This 150-watt LED unit delivers 22,800 lumens and is field serviceable. Compatible with trunnion mount installations, the IP66 rated fixture operates on universal 12-24V AC/DC 50/60 Hz and features a 3/4" NPT wiring hub.**

The HAL-PRM-LED-R3-1224-TRN is a Class I, Division 2 and Class II, Division 1 & 2 flood light fixture that is designed for reliable illumination in facilities with hazardous gases/vapors. This 150-watt fixture offers 22,800 lumens of high quality light in hazardous locations requiring protection due to the presence of combustible gases/vapors, such as oil and gas sites, refineries, chemical processing, waste treatment facilities, fuel stations and more. This LED fixture is offered in a 24-degree spot, 60-degree flood or 90-degree wide flood beam configuration. Color temperature options for the LED light includes: 5000K, 4500K, 4000K, 3500K or 3000K. This unit is a suitable replacement for fluorescent flood light fixtures. Equipped with field serviceable features, the LED assembly is sealed from the driver box, allowing the driver to be changed without impacting the LEDs.

This hazardous location light is protected by a copper-free cast aluminum housing, with an epoxy powder coated gray finish for durability in rugged environments. The non-sparking housing is specially designed to dissipate heat, which increases the efficiency and lifespan of the LEDs and electronic components. Equipped with a hardened borosilicate glass lens, the T5-rated LED fixture carries an IP66 waterproof rating.

**LED Benefits:** Unlike gas burning and arc type lamps that have glass bulbs, LEDs have no filaments or fragile housings to break during operation and/or transportation. Instead of heating a small filament or using a combination of gases to produce light, light emitting diodes (LEDs) use semi-conductive materials that illuminate when electric current is applied, providing instant illumination with no warm up or cool down time before re-striking. Because there is no warm up period, this light can be cycled on and off with no reduction in lamp life.

LED lights run at significantly cooler temperatures than traditional metal halide and high pressure sodium lights and contain no harmful gases, vapors, or mercury, making them both safer and more energy efficient. No extra energy is wasted in cooling enclosed work areas due to external heat emissions from bulb type lights, and the operator risks associated with traditional lighting methods, such as accidental burns and exposure to hazardous substances contained in the glass bulbs, are eliminated. In addition, LEDs are also safer for the environment as they are 100% recyclable, which eliminates the need for costly special disposal services required with traditional gas burning and arc type lamps.

**Field Serviceability:** This LED light fixture is field serviceable. All major internal components can be purchased from Larson Electronics and installed by a licensed electrician with basic

tools. With most explosion proof fixtures, the fixture must be returned to the manufacturer for repair work, which presents downtime and long turn around times for repair work. Larson Electronics addresses this issue with products that cater to field serviceability, allowing operators to perform service work without having to return the fixture to the manufacturer in the event of damage or failure.

**Voltage:** The hazardous location light is universal voltage capable and can be operated with 12-24V AC/DC 50/60 Hz.

**Wiring:** A 3/4" NPT hub at the back of the unit is available for completing wiring connections.

**Mount:** This LED light fixture comes standard with trunnion mounting features. Several mounting options including ceiling, wall and pendant mounts for replacing existing light fixtures can be ordered separately.

**Suggested Applications:** Hazardous locations, oil drilling rigs, refineries, solvent and cleaning areas, chemical manufacturing, waste treatment plants, gas processing plants, aircraft maintenance and more.

At Larson Electronics, we do more than meet your lighting needs. We also provide replacement, retrofit, and upgrade parts as well as industrial grade power accessories. Our craftsmen can custom build any lighting system and/or accessories to fit the unique demands of your operation. A commitment to honesty, quality, and dependability has made Larson Electronics a leader in the lighting and electronics business since 1973. Contact us today at 800-369-6671 or message sales@larsonelectronics.com for more information about our custom options tailored to meet your specific industry needs.

Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.765.7664

# Frequently Asked Questions (FAQ)

There are no Faqs

Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.765.7664



Image: HAL-PRM-LED-R3-1224-TRN

Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.765.7664



Image: HAL-PRM-LED-R3-1224-TRN



Image: HAL-PRM-LED-R3-1224-TRN

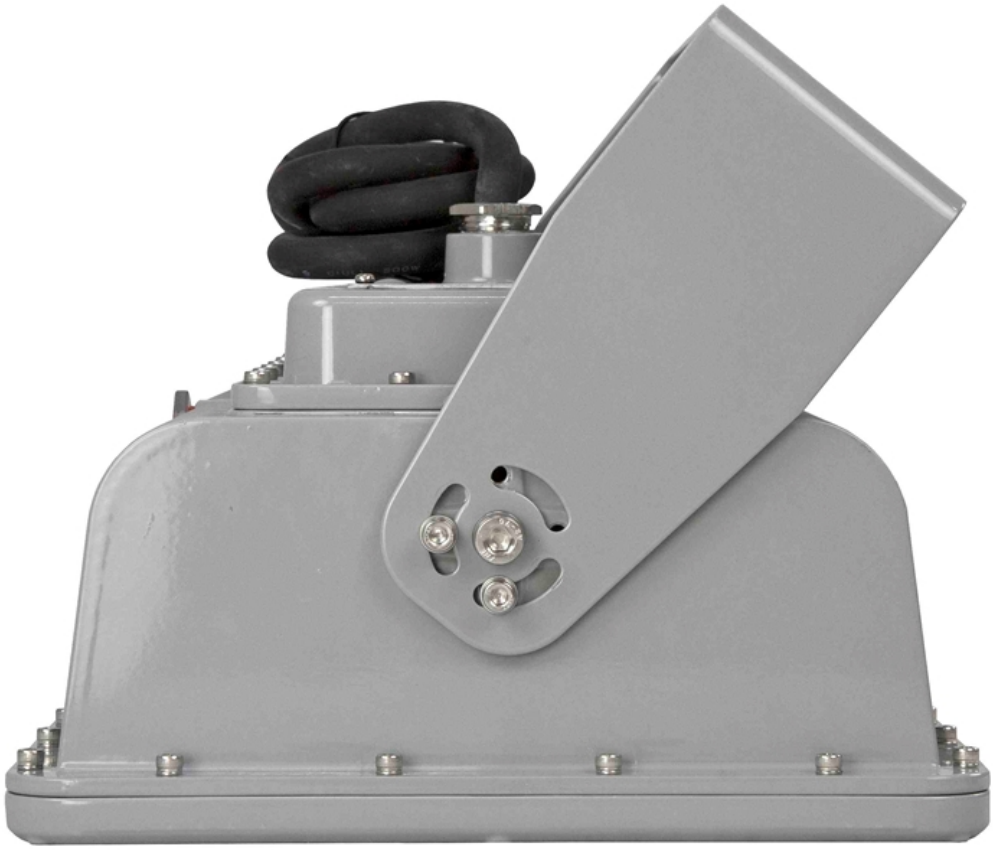


Image: HAL-PRM-LED-R3-1224-TRN

Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.765.7664

**HAL-PRM-LED-R3-1224-TRN**

**Product ID: 277754**

**Warranty:** 60 Months.

**Harmonized System (HS) Code:** 9405.41.84.10
**Export Control Classification Number (ECCN):** EAR99

**Options:**

**HAL-PRM-LED-R3-1224-TRN-Beam Angle-Color Temp**
**Example: HAL-PRM-LED-R3-1224-TRN-24B-50K**

| Beam Angle | |
|---|---|
| 24-DEGREE SPOT | -24B |
| 60-DEGREE FLOOD | -60B |
| 90-DEGREE WIDE FLOOD | -90B |

| Color Temp | |
|---|---|
| 5000K | -50K |
| 4500K | -45K |
| 4000K | -40K |
| 3500K | -35K |
| 3000K | -30K |

Links (Click on the below items to view):

- **Canadian CEC Certificate (Commonly referred to as CSA Certificate)**( https://www.larsonelectronics.com/images/product/CECCert/277754.PDF )
- **CE Certificate**( https://www.larsonelectronics.com/images/product/CECert/277754.PDF )
- **Dimensional Drawing 2D**( https://www.larsonelectronics.com/images/product/DimensionalDrawing/277754.PDF )
- **FCC Certificate (Federal Communications Commission, USA)**( https://www.larsonelectronics.com/images/product/FCCCert/277754.PDF )
- **MSDS (Material Safety Data Sheet**( https://www.larsonelectronics.com/images/product/Msds/277754.PDF )
- **Operations Manual**( https://www.larsonelectronics.com/images/product/Manual/277754.PDF )
- **RoHS Certificate (Restriction of Hazardous Substances)**( https://www.larsonelectronics.com/images/product/RoHSCert/277754.PDF )
- **USA NEC Certificate (Commonly referred to as UL Certificate)**( https://www.larsonelectronics.com/images/product/NECCert/277754.PDF )
- **Wiring Diagram**( https://www.larsonelectronics.com/images/product/WiringDiagram/277754.PDF )
- **HigResPic1**( https://www.larsonelectronics.com/images/product/HigResPic1/277754.JPG )
- **HigResPic2**( https://www.larsonelectronics.com/images/product/HigResPic2/277754.JPG )
- **HigResPic3**( https://www.larsonelectronics.com/images/product/HigResPic3/277754.JPG )
- **HigResPic4**( https://www.larsonelectronics.com/images/product/HigResPic4/277754.JPG )
- **HigResPic5**( https://www.larsonelectronics.com/images/product/HigResPic5/277754.JPG )
- **HigResPic6**( https://www.larsonelectronics.com/images/product/HigResPic6/277754.JPG )
- **HigResPic7**( https://www.larsonelectronics.com/images/product/HigResPic7/277754.JPG )
- **HigResPic8**( https://www.larsonelectronics.com/images/product/HigResPic8/277754.JPG )
- **HigResPic9**( https://www.larsonelectronics.com/images/product/HigResPic9/277754.JPG )
- **HigResPic10**( https://www.larsonelectronics.com/images/product/HigResPic10/277754.JPG )
- **Video1**( https://www.youtube.com/watch?v=aOzETLXcJMU )
- **ISO 9001 Certification**( http://larsonelectronics.com/images/pdfdocs/ISO9001.PDF )
- **Business Certificate**( https://www.larsonelectronics.com/images/pdfdocs/w9.PDF )
- **Shipping Time Map**( https://www.larsonelectronics.com/images/product/ShippingTimeMap/ShippingTimeMap.pdf )