Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.498.3364

IND-DHA-FUVC-EX-24-2L-V1-120V-10C

80W Far-UV Excimer Disinfection Fixture - (2) 222nm Lamp - 120V - 2-Foot Fixture - L Bracket End Mount - 10' 16/3 SOOW Cord w/ 120V Cord Cap

Product ID: 278405

Please see last page for supporting documentation for this product(certificates, CAD files & drawings, IES files, wiring diagrams, etc).



Larson Electronics LLC manufactures a wide variety of products, including custom built to spec designs. The pictures displayed for this unit are a general representation of form factor for the product line and may not accurately represent this exact configuration in every detail due to custom builds and changes between similar products in our standard catalog. The specifics for this configuration are listed in the specification table and supporting documentation (CAD files, Dimensional Drawing, Name Plate Diagram, Wiring Diagram, etc.). This means that specific details (receptacles, plugs, wires, connections, mounting brackets, external finishes, etc.) may not be accurately represented in images vs specifications. Please review specifications and do not order based solely on images.

This unit is Made In USA - Manufactured in Texas

IND-DHA-FUVC-EX-24-2L-V1-120V-10C Far UV-C Sanitation Light Fixture

Unit Type: Far UV-C Germicidal Fixture
Lamp Technology: UV Excimer Sanitation
Lamp Qty: (2)
Dimensions: 26.5"-L x 7"-W x 8"-H
Weight: -
Voltage: 120 V
Total Watts: 80W
Total UV-C Output: -
Effective UV Intensity: 40 uW/cm2 @ 1.57"
Expected Lifespan: 10,000+ Hours
UV Wavelength: Far UV-C, 222nm
Lamp Type: UV-C Excimer
Lamp Base: -
Replacement Lamp: FRL-EMX-6-40W-FUVC
Beam Angle: 180º
Lighting Configuration: Flood Pattern
Power Factor: -
Operating Temperature Range: -
Lamp Lens Material: N/A
Housing: Aluminum
Finish: 2-layer Powder Coated Finish - Grey
Mounting: End Mount L-brackets

Ratings

222nm Germicidal Light
Kills 99% of Viruses and Other Germs
Mercury Free Lamp
Instant-On Lamp, No Warm Up Time
More Efficient & Effective than UVC Lamps
No Harmful UVC Emissions
No Block Off/Bandpass/Cutoff Filters) Needed
Skin Safe & Eye Safe
Ozone Free
Low Heat Output
EPA Reg. No 98409-1
EPA Est. No. 98409-TX-1

Special Orders - Special Requirements

Contact us for special requirements

Intl: 1-903-270-1187

Toll Free: 1-800-369-6671

Wiring: 10' 16/3 SOOW Cord w/ General Area Cord Cap

Cord Cap Options: 5-15, 5-20, L5-15, L5-20, or Pigtail

PLEASE NOTE: UV-C light can cause temporary or permanent loss of vision, and temporary acute redness or ulceration (mild to severe sunburn) to exposed skin. To prevent exposure, do not operate the device in any application that allows UV-C light to be visible during operation. NEVER LOOK DIRECTLY AT THE BULB OR DISINFECTING TARGET ZONE. DO NOT touch bulb with bare hands. The oils in your skin will damage the lamp. Fingerprints will result in reduced performance and significantly reduce the lifespan of the lamp unless they are removed with alcohol. Please read instruction manual for UV safety requirements before operating.

Fax: 1-903-498-3364

E-mail: sales@larsonelectronics.com

This unit is Made In USA - Manufactured in Texas

The IND-DHA-FUVC-EX-24-2L-V1-120V-10C from Larson Electronics is a Far-UV Sanitation Fixture that disinfects 99% of viruses, bacteria, mold, and spores in locations requiring an aesthetically pleasing germicidal fixture for occupied areas. This eye and skin safe disinfection unit uses two 40-watt excimer lamps that emits far-UV 222 nm germicidal light. Protected by a heavy-duty aluminum housing with a 2-layer powder coated grey finish, the germicidal light features end mount L-brackets.

Please note: This product produces UV light. Make sure to follow all safety guidelines and protocols found in the user manual. UVC light in the proper setting kills up to 99.9% of viruses, mold, spores, and bacteria. Click here to learn more about UVC and the coronavirus*

The IND-DHA-FUVC-EX-24-2L-V1-120V-10CUV sanitation fixture is a powerful and sleek lighting solution for restaurants, businesses, busy locations, and occupied areas. This 40-watt unit consists of two 40-watt excimer lamps that provides 222nm far UV-C output while operating on 120 V. Equipped with an expected lifespan of 10,000+ hours, the light emits a flood beam pattern. The housing on this sanitation unit is constructed of aluminum with a 2-layer powder coated grey finish for durability.

Far-UV 222 nm light is considered to be eye and skin safe for humans, allowing the lamps to be used in occupied areas safely with minimum risk. The 222 nm wavelength does not penetrate the cornea of the eye and cannot impose corneal impairment. Additionally, this UV band is blocked by the top layer of skin (stratum corneum) which protects underlying cells from damage. Exposure to far-UV 222 nm lamp does not cause skin inflammation or swelling. Due to these safety benefits, extensive protective clothing is not required when using this type of sanitation light in occupied areas.

Benefits of Excimer Far UV Lamps: When it comes to Far-UV lamps, there are few options in the skin-safe and eye-safe wavelengths. Similar to LED lamps, excimer lamps provide "instant-on" startup, and do not require a warmup period; excimer lamps are at 100% peak output when switched on. Most lamp technologies that do product UVC use mercury in the manufacturing process. Excimer lamps have ZERO mercury, making them more environmentally friendly. Excimer lamps can be tuned to specific wavelengths (222nm wavelength for this product) and produce no harmful UVC radiation or wasteful visible light and infrared light. Excimer lamps are more efficient at converting electricity (input power) into UV irradiance, which reduces the heat output from excimer lamps over other technologies. Fluorescent, amalgam, low-pressure mercury, and high-pressure mercury lamps do not product as tight of a wavelength and generate more heat, both of which wastes energy for the UV sanitation application. Excimer lamps have a higher average UV irradiance per square inch and have a higher photon emission over other lamp technologies. Being safe for use in occupied areas, instant-on power, mercury free, higher UV output, and low heat output make Far-UV excimer lamps the preferred choice for UV sanitation and disinfecting applications.

Germicidal excimer lamps emit far-UV 222 nm light that is generated by specific excimer molecules. The far-UV lights come with an expected lifespan of 10,000+ hours. This gas-filled emitter is energy efficient and offers cool operation. A power supply is typically utilized with the non-toxic lamp to ensure consistent UV output. The sanitation light, which is suitable for use in occupied areas, features instant

start capabilities.

Click Photos to Enlarge



5-15 Straight Blade Plug
15 Amp / 125V Rated



L5-15 Twist Lock Plug
15 Amp / 125V Rated




Flying Leads / Pigtail Wires


Wiring/Plug: This Far-UV sanitation fixture is equipped with 10 feet of 16/3 chemical and abrasion resistant SOOW cord that is fitted with an industrial grade cord cap for easy connection to common wall outlets. Plug options include standard 5-15 15 amp straight blade plug for 110 V wall outlets with ground, NEMA L5-15 15 amp twist lock plug for 125 V twist lock outlets, standard 5-20 20 amp straight blade plug for 110V wall outlets with ground or or NEMA L5-20 20 amp twist lock plug for 125 V twist lock outlets. Alternatively, we can provide flying leads with no plugfor hard wire applications or for operators who prefer to wire in user provided cord caps. Please choose pigtail option below for flying leads with no plug.
Mounting: The Far-UV sanitation fixture contains end mount L-brackets for mounting during installation.
Note on Environment: Sunlight and visible light fixtures do not impact the effectiveness of the disinfecting on this UVC sanitation product. Metal halide, high pressure sodium, fluorescent, and LED light fixtures can be left on. The UV radiation emitted from this product is not disrupted by any type of lighting in the environment. Put simply, NO it DOES NOT need to be dark in the area you plan to disinfect. Please see user manual for additional safety information.
Applications: Sanitation, disinfection, restaurants, retail spaces, lobbies, commercial locations, industrial parks, schools, public transportation hubs, airports, office buildings, medical centers, and more; kill 99% of viruses, bacteria, mold, and spores.
At Larson Electronics, we do more than meet your lighting needs. We also provide replacement, retrofit, and upgrade parts as well as industrial grade power accessories. Our craftsmen can custom build any lighting system and/or accessories to fit the unique demands of your operation. A commitment to honesty, quality, and dependability has made Larson Electronics a leader in the lighting and electronics business since 1973. Contact us today at 800-369-6671 or message sales@larsonelectronics.com for more information about our custom options tailored to meet your specific industry needs.


Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.498.3364

Frequently Asked Questions (FAQ)

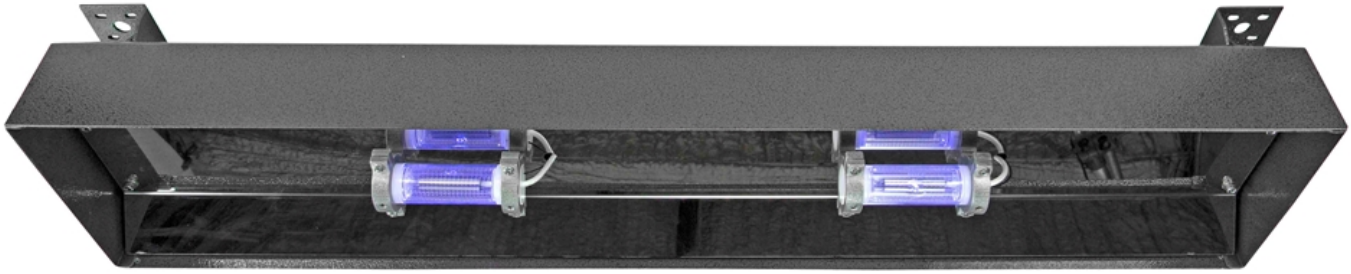

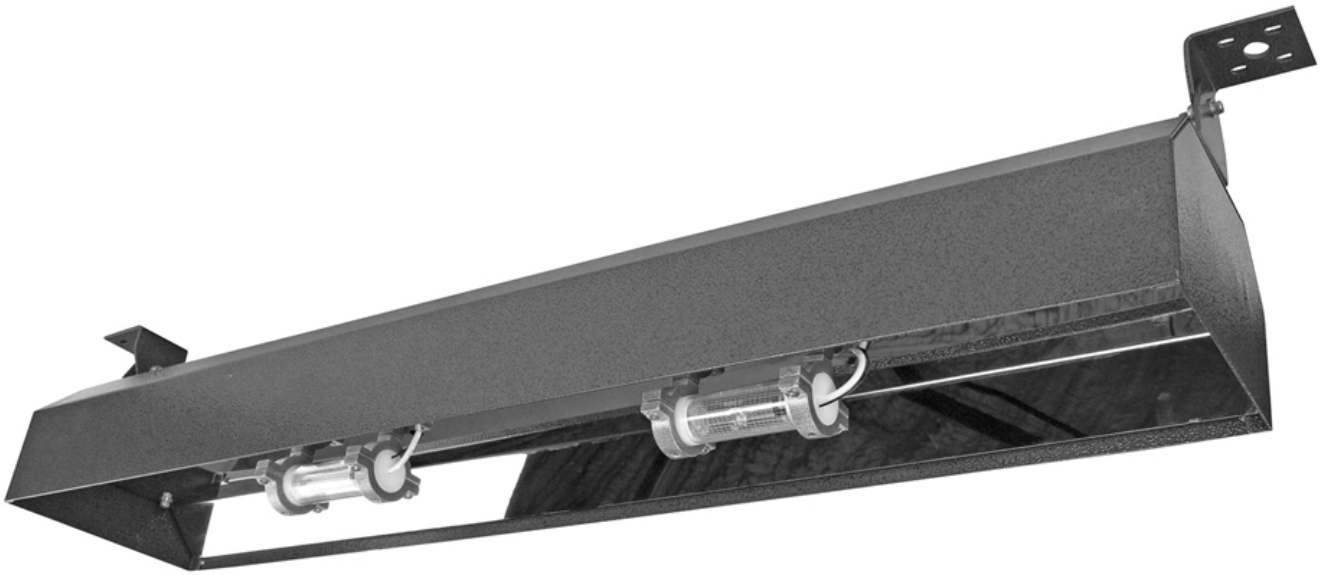

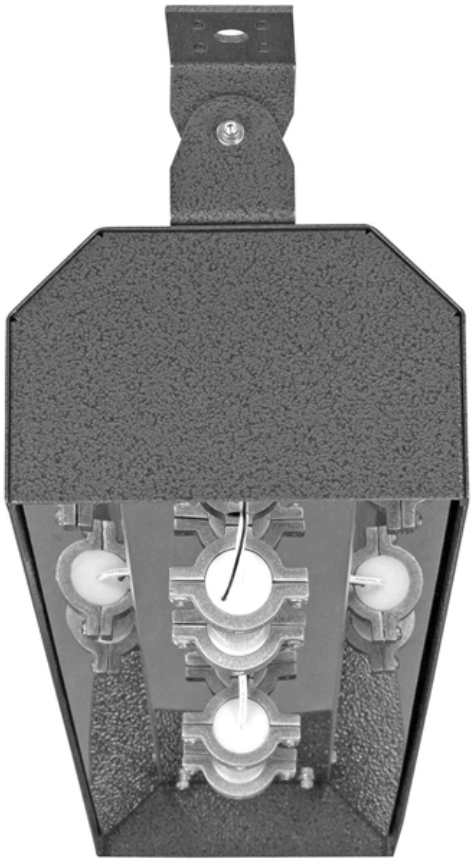

Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.498.3364



Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.498.3364

IND-DHA-FUVC-EX-24-2L-V1-120V-10C

Product ID: 278405

Export Control Classification Number (ECCN): EAR99

Options:

IND-DHA-FUVC-EX-24-2L-V1-120V-10C-Cord Cap

Example: IND-DHA-FUVC-EX-24-2L-V1-120V-10C-5.15

Cord Cap	
5-15 STRAIGHT	-5.15
5-20 STRAIGHT	-5.20
L5-15 TWIST	-L5.15
L5-20 TWIST	-L5.20
PIGTAIL	-Pigtail

Links (Click on the below items to view):

- Beam Information (Coverage, Datafile)
- Canadian CEC Certificate (Commonly referred to as CSA Certificate)
- Catalog Page - Product Series
- Certificate 1, Misc
- Certificate 4, Misc
- Eye Safety Information/Certificate
- Lighting Facts & Information
- Operations Manual
- Spectrum Curve (Wavelength Graph)
- USA NEC Certificate (Commonly referred to as UL Certificate)
- Wiring Diagram (Oneline)
- HigResPic1
- HigResPic2
- HigResPic3
- HigResPic4
- HigResPic5
- HigResPic6
- HigResPic7
- HigResPic8
- HigResPic9
- HigResPic10
- Video1
- Video2
- ISO 9001 Certification
- Business Certificate
- Shipping Time Map