Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671


www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.498.3364

SPLT-SKM-S1-0.6K-LM30-170AH.24V-NYC-M1

30' Portable Solar Tower - 24V DC - (2) 300W Panels, Batteries, BC - Nycoil Cable/Skid Mount

Product ID: 281153

Please see last page for supporting documentation for this product(certificates, CAD files & drawings, IES files, wiring diagrams, etc).

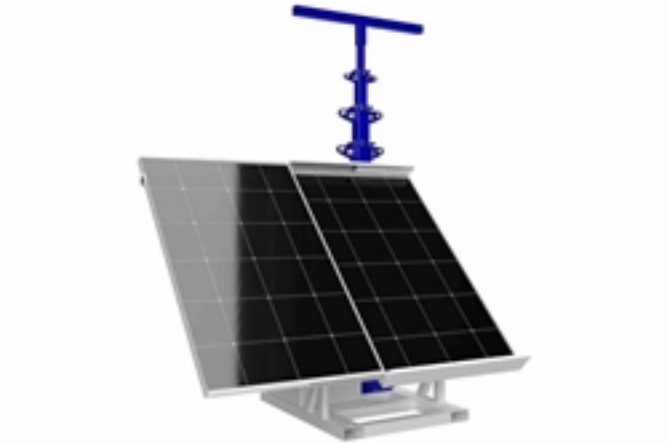

Larson Electronics LLC manufactures a wide variety of products, including custom built to spec designs. The pictures displayed for this unit are a general representation of form factor for the product line and may not accurately represent this exact configuration in every detail due to custom builds and changes between similar products in our standard catalog. The specifics for this configuration are listed in the specification table and supporting documentation (CAD files, Dimensional Drawing, Name Plate Diagram, Wiring Diagram, etc.). This means that specific details (receptacles, plugs, wires, connections, mounting brackets, external finishes, etc.) may not be accurately represented in images vs specifications. Please review specifications and do not order based solely on images.

SPLT-SKM-S1-0.6K-LM30-170AH.24V-NYC-M1 Skid Solar Mast

Mast Specs

Tower Length: 30'
Stages: 5
Capacity: -
Mast Head Length: 44"
Materials: Steel
Finish: Powder Coated - Gloss Blue
Operation: (1) 2,500 lbs Manual Hand Crank Winch
Mast Cable: 3/16" Galvanized Aircraft Cable
Nycoil Cable: 3/4" Around Mast

Solar Specs

Panels: (2) 300W Panels
Method of Deployment: Sliders, Adjustable Tilt
System Voltage: 24V DC
Battery Bank: 170 aH
Charge Controller: 20 aH
Battery Charger: 120V

Skid Mount Specs

Materials: -
Storage Dimensions: 87"-H x 48"-W
Deployed Dimensions (Maximum): 243"-H x 82.13"-W x 80.49"-L
Electrical Enclosures: (2) NEMA 3R @ Top and Bottom

Summary

30' Mast
Steel Construction
Powder Coated Finish
125 mph Wind Resistance
Manual or Optional Electric Operation
Fully Solar, No Fuel Needed
Removable Mast Head
Fits in 53' Trailer or Shipping Container

Mount: Skid Mount

Weight: +-600 lbs

Shipping: Common Freight

Shipping Dimensions: -

Shipping Weight: +-600 lbs

Options: Length- Mounting-Fixtures/ Call Us for Special Requirements

Special Orders - Special Requirements

Contact us for special requirements

Intl: 1-903-270-1187

Toll Free: 1-800-369-6671

Fax: 1-903-498-3364

E-mail: sales@larsonelectronics.com

Made in the USA

The Larson Electronics SPLT-SKM-S1-0.6K-LM30-170AH.24V-NYC-M1 Portable Solar Tower provides a safe and effective way for operators to quickly deploy customer-provided equipment to elevations up to 30 feet. Secured on a skid platform with skid pockets, this solar-powered system has a telescoping tower that folds over for easy transportation, a rotating boom that allows for 360° rotation, a removable mast head and two solar panels. Equipped with a battery bank and two NEMA 3R electrical enclosures, customers must provide supporting devices to complete the system.

PLEASE NOTE: ANY FREE SHIPPING OFFERS DO NOT APPLY TO LIGHT MASTS OR LIGHT TOWERS

The SPLT-SKM-S1-0.6K-LM30-170AH.24V-NYC-M1 offers a reliable method to power equipment with solar panels in remote locations and outdoor sites. This system features a 30` telescoping mast, two 300-watt solar panels, battery bank, charge controller, battery charger, nycoil cable and two electrical enclosures. All system components are secured to a skid frame for seamless transportation. This portable solar mast can easily be transported using a 53` trailer or shipping container. Multiple units fit inside a semi truck, shipping container, standard hauling trailer or back of a pickup truck. This feature makes the versatile unit an affordable option for a wide range of outdoor projects and applications.

Operation:

- (2) 300W solar panels
- 170 aH battery bank - 24V DC
- 20 aH charge controller
- 120V battery charger
- (2) NEMA 3R enclosures @ top and bottom
- 3/4" nycoil cable around mast
- All system components secured to a skid platform
- Entire system fits in a 53` trailer or shipping container

Lights: This solar-powered system does not come with lights. We can add flood lights, spotlights or additional infrared lights to this unit upon request and with additional costs.

PA System: This unit does not have a PA system. We can add a one-way or two-way system upon request and with additional costs.

Router/Wireless 4G Hotspot: The solar tower does not have a router or support wireless connections. We can add these capabilities at an additional cost.

GPS Tracking: This system does not feature GPS tracking (we can add GPS tracking at an additional cost).

LED Strobe: The SPLT-SKM-S1-0.6K-LM30-170AH.24V-NYC-M1 does not have an LED strobe light. We can add an LED strobe light (available in different colors) at an additional cost.

Mast: This telescoping five stage steel mast from Larson Electronics is designed to allow operators to quickly and safely deploy a variety of equipment in locations where it must be elevated to heights up to 30` for effective coverage. This mast can be extended to 30` above the skid base for maximum area coverage, and collapsed for applications where a smaller footprint is required. The tower is

constructed of square steel tubing. The mast is extended to its full height using a manual crank winch with 3/16" galvanized steel cable. A 3/4" nycoil cable wraps around the mast.
A 44" wide and 2" by 2" by 1/4" thick mounting plate is attached to the upper section of the mast which provides a strong and stable platform for equipment. When elevated to its full upright position, the mast can be rotated a full 360°. By loosening the T-Handle, operators can rotate the mast with easy in either direction. The mast can be positioned in one of four different positions, and locked back in place by re-tightening the T-handle. The mast itself spins freely with easy, and can typically be rotated with a single hand. The LM series of towers are powder coated with glossy blue finish for corrosion resistance and aesthetics.
The LM family of telescoping towers feature a proprietary mast guidance system, which provide increased stability during high winds. When lowered, the mast can withstand winds up to 125 mph. Custom builds can be provided for higher wind speed resistance when fully raised.
Solar Panel Assembly: This unit is comprised of two 300-watt solar panels, generating a total maximum output of 0.6 KW. The panels are secured to the skid frame. During deployment, one solar panel slides outwards forming a 2-panel system. The panels can be tilted upwards for maximum sunlight intake.
Batteries: This unit features a 170 aH battery bank for 24V DC power and storage.
Solar Charge Controller: The solar-powered system has a 20 aH charge controller.
Battery Charger: The system is equipped with a 120V battery charger. For systems with a battery charger, the component is plugged into the backup generator (if one is available on the model) by default. The battery charger can be unplugged for charging with local power sources.
Inverter: This unit does not have an inverter. We can add one at an additional cost.
Backup Generator: This solar tower does not have a backup generator. We offer models with gasoline, LPG/LNG or diesel backup gensets (may come with additional costs).
Enclosures: Two NEMA 3R rated electrical enclosures are available at the top and bottom of the system for customer-provided equipment, installations and devices.
Skid Mount: All components are secured on a heavy-duty skid platform with skid pockets. Equipped with pillow block bearings, the frame features 5-degree pivot plates.
Applications: Live events, law enforcement, military, commercial, industrial facilities, remote locations and more.
At Larson Electronics, we do more than meet your lighting needs. We also provide replacement, retrofit, and upgrade parts as well as industrial grade power accessories. Our craftsmen can custom build any lighting system and/or accessories to fit the unique demands of your operation. A commitment to honesty, quality, and dependability has made Larson Electronics a leader in the lighting and electronics business since 1973. Contact us today at 800-369-6671 or message sales@larsonelectronics.com for more information about our custom options tailored to meet your specific industry needs.

Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.498.3364

Frequently Asked Questions (FAQ)

Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.498.3364



SPLT-SKM-S1-0.6K-LM30-170AH.24V-NYC-M1

Product ID: 281153

Export Control Classification Number (ECCN): EAR99

Links (Click on the below items to view):

- **HigResPic1**
- **HigResPic2**
- **Video1**
- **Video2**
- **Video3**
- **ISO 9001 Certification**
- **Business Certificate**
- **Shipping Time Map**