Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.498.3364

MPD-MT-ISX-3P-208D-18KVA-230D-N3R-2X5FT-CS50

18 kVA 3PH Isolation Transformer, 208V Delta Primary, 230 Delta Secondary, N3R, Ventilated, 60 Hz, (2) 5' 4/4 SOOW Whips w/ Cord Caps

Product ID: 296538

Please see last page for supporting documentation for this product(certificates, CAD files & drawings, IES files, wiring diagrams, etc).



Larson Electronics LLC manufactures a wide variety of products, including custom built to spec designs. The pictures displayed for this unit are a general representation of form factor for the product line and may not accurately represent this exact configuration in every detail due to custom builds and changes between similar products in our standard catalog. The specifics for this configuration are listed in the specification table and supporting documentation (CAD files, Dimensional Drawing, Name Plate Diagram, Wiring Diagram, etc.). This means that specific details (receptacles, plugs, wires, connections, mounting brackets, external finishes, etc.) may not be accurately represented in images vs specifications. Please review specifications and do not order based solely on images.

MPD-MT-ISX-3P-208D-18KVA-230D-N3R-2X5FT-CS50 DOE Efficiency Isolation Transformer

Transformer Type: Isolation Transformer
Transformer Configuration: Dry Type
Phase: Three Phase
Frequency: 60 Hz
Primary Voltage: 208V AC
Primary Connection: Delta
Primary Amps: 49.96 Amps
Capacity: 18 KVA
Secondary Voltage: 230V AC
Secondary Connection: Delta
Secondary Amps: 45.18 Amps
Knockouts: -
FCAN (Above) Taps: 2
FCAN (Below) Taps: 4
Tap %: 2.5
Impedance: 2.5-6.5% Typical
Efficiency @ 35% Load: ~98%
Winding Material: Aluminum
Wiring: (2) 5' 4/4 SOOW Whips w/ Cord Caps (One on Primary Side & One on Secondary Side)
Cord Caps: CS8365C Plug on Primary Side; CS8364C Connector on Secondary Side
Primary Termination (Std): Terminal Lugs
Secondary Termination (Std): Terminal Lugs
Termination Access: Front Access Cover

Approvals/Ratings

NRTL Listed for United States
NRTL Listed for Canada
NEMA 3R Indoor/Outdoor Steel Enclosure
Meets or Exceeds NEMA ST-20 Standards
Isolation Transformer
Distribution Type Transformer
Distribution Type Transformer
Built to UL-50 Standards
Seismic Qualified for Earthquake Loads
RoHS
CE Certified

Mounting: Floor
Cooling: Air/Dry
Insulation: 220°C
Temperature Rise: 150°C
Sound Level: Meets NEMA ST-20 Standards
Enclosure Material: NEMA Type 3R Heavy Duty Ventilated - Steel
Finish: ANSI 61 Grey
Dimensions: 19.37"-L x 24.39"-W x 25.5"-H
Weight: 325 lb
Shipping Method: Pallet Freight - LTL
Shipping Weight: 390 lb
Shipping Dimensions: 48"-L x 40"-W x 34"-H

Special Orders - Special Requirements
Contact us for special requirements

Toll Free: 1-800-369-6671
Intl: 1-903-270-1187
Fax: 1-903-498-3364
E-mail: sales@larsonelectronics.com

The MPD-MT-ISX-3P-208D-18KVA-230D-N3R-2X5FT-CS50 from Larson Electronics is a Three Phase 208V to 230V 18 KVA Isolation Transformer that is powerful, reliable, and designed with the environment in mind. Suitable for both indoor and outdoor applications, the MPD-MT-ISX-3P-208D-18KVA-230D-N3R-2X5FT-CS50 provides increased reliability and protection against critical equipment failures. This 18 KVA isolation is designed for distribution loads and potential seismic activity. The lower operating costs, lower heat emissions, and lower cost of ownership make this transformer ideal for a wide range of applications and businesses. This transformer is equipped with a 5' 4/4 SOOW whip with cord cap on both the primary and secondary sides.

PLEASE NOTE: ANY FREE SHIPPING OFFERS DO NOT APPLY TO POWER DISTRIBUTION PANELS, TRANSFORMERS, OR SUBSTATIONS*

Transformer Features: The MPD-MT-ISX-3P-208D-18KVA-230D-N3R-2X5FT-CS50 Isolation transformer is a three phase transformer with a 18 KVA capacity rating. This isolation transformer is configured with an input voltage of 208V Delta 3-Phase AC on the primary side and an output voltage of 230V Delta 3-Phase AC on the secondary side. Featuring robust construction, this unit's cores are manufactured with non-aging, cold-rolled silicon steel laminations using state of the art technology.

This unit boasts a low cost of ownership and is highly energy efficient. Lower heat emissions mean less cooling is needed as well. The standard NEMA Type 3R enclosure makes the unit suitable for both indoor and outdoor applications and is designed to be floor mounted. Wall mount brackets or additional mounting accessories can be purchased separately. This 20 KVA distribution transformer features 220°C insulation with a 150°C temperature rise.

Benefits: The MPD-MT-ISX-3P-208D-18KVA-230D-N3R-2X5FT-CS50 208V to 230V general purpose transformer offers many benefits to the consumer. Precision cut aluminum transformer winding material help to improve performance. The close tolerances used during manufacturing also eliminates burrs which hinder performance. Each core is specially coated to prevent the ingress of moisture and are electrically balanced to minimize axial forces during short circuit situations. This transformer provides owners with significant energy savings as well as offering environmental benefits. Higher efficiency not only extends the life of the transformer, but also turn into cost savings for owners in the form of lower energy bills and decreased cost of ownership. Integrated floor mounting brackets make installation fast and easy and the offset outward facing floor installation holes allow for easy power tool access.

The MT-ISX series of isolation transformers from Larson Electronics meet or exceed efficiency standards for United States and Canada. This results is overall lower cost of ownership throughout the life of the transformer.

Wiring: The MPD-MT-ISX-3P-208D-18KVA-230D-N3R-2X5FT-CS50 is equipped with a 5' 4/4 SOOW whip on the primary side and a 5' 4/4 SOOW whip on the secondary side. The primary side whip is terminated with a 50-amp, 3P4W CS8365C plug. The secondary side whip is terminated with a 50-amp, 3P4W CS8364C connector.

Safety: The MPD-MT-ISX-3P-208D-18KVA-230D-N3R-2X5FT-CS50 is an isolation

transformer which means that it provides operators with an increased level of protection against electric shock and injury. An isolation transformer can also suppress electrical noise in sensitive devices and transfer power between two circuits which must not be connected. The MPD-MT-ISX-3P-208D-18KVA-230D-N3R-2X5FT-CS50 achieves these safety features by separating or "isolating" the powered device from the power source and insulation between the primary and secondary power sources.

Applications: Converting 208V local grid power to 230V for on-site equipment. This 18 KVA power transformer is ideal for sensitive equipment such as CNC equipment, computers, medical devices, ovens, or laboratory instruments.

Larson Electronics is a manufacturer and as such can build stationary and portable transformer systems to your specifications. Although we carry several models of power distribution transformer systems, we can deliver custom ordered units almost as quickly as our prebuilt units. If this model does not meet your needs, please contact us at 1-800-369-6671 or sales@larsonelectronics.com to discuss your specific requirements.

Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.498.3364


Frequently Asked Questions (FAQ)


Larson Electronics
1-800-369-6671

Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.498.3364



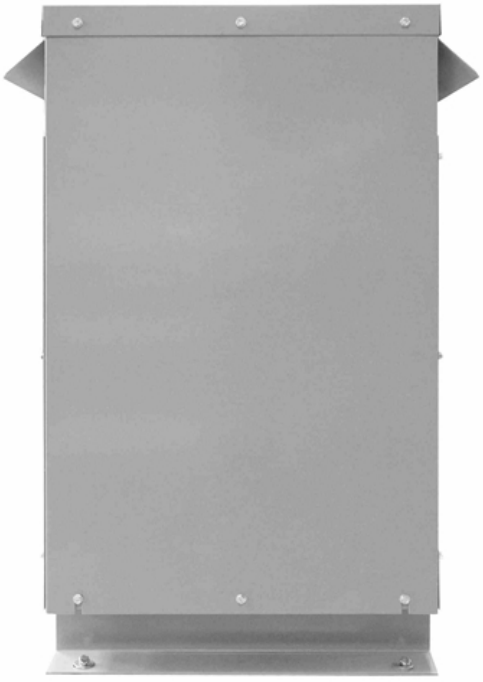

MPD-MT-ISX-3P-208D-18KVA-230D-N3R-2X5FT-CS50

Product ID: 296538

Warranty: 6 Months

Export Control Classification Number (ECCN): EAR99

Links (Click on the below items to view):

- **HigResPic1**
- **HigResPic2**
- **HigResPic3**
- **HigResPic4**
- **ISO 9001 Certification**
- **Business Certificate**
- **Shipping Time Map**