Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.498.3364

MPD-MT-K9-3P-480D-112.5KVA-415Y.240-N3R-ECB-M1

112.5 kVA 3PH K9 Transformer, 480V Delta Primary, 415Y/240 Wye-N Secondary, N3R, Ventilated, 60 Hz

Product ID: 297324

Please see last page for supporting documentation for this product(certificates, CAD files & drawings, IES files, wiring diagrams, etc).



Larson Electronics LLC manufactures a wide variety of products, including custom built to spec designs. The pictures displayed for this unit are a general representation of form factor for the product line and may not accurately represent this exact configuration in every detail due to custom builds and changes between similar products in our standard catalog. The specifics for this configuration are listed in the specification table and supporting documentation (CAD files, Dimensional Drawing, Name Plate Diagram, Wiring Diagram, etc.). This means that specific details (receptacles, plugs, wires, connections, mounting brackets, external finishes, etc.) may not be accurately represented in images vs specifications. Please review specifications and do not order based solely on images.

MPD-MT-K9-3P-480D-112.5KVA-415Y.240-N3R-ECB-M1 K-Factor Isolation Transformer

Transformer Type: Isolation Transformer
Transformer Configuration: Dry Type
Phase: Three Phase
Frequency: 60 Hz
Primary Voltage: 480V AC
Primary Connection: Delta
Capacity: 112.5 KVA
Secondary Voltage: 415Y/240V AC
Secondary Connection: Wye-Neutral
Knockouts: -
FCAN (Above) Taps: 3
FCAN (Below) Taps: 3
Tap %: 2.5
Impedance: 2.5-6.5% Typical
K-Factor Rating (Harmonic Mitigation): K-9 Designed for Harmonic-producing Equipment Representing <50%
Efficiency @ 35% Load: ~98%
Winding Material: Aluminum
Primary Termination (Std): Terminal Lugs
Secondary Termination (Std): Terminal Lugs
Termination Access: Front Access Cover
Enclosed Circuit Breaker Amp Rating: 200 Amps
Mounting: Floor
Cooling: Air/Dry

Approvals/Ratings

NRTL Listed for United States
NRTL Listed for Canada
NEMA 3R Indoor/Outdoor Steel Enclosure
Meets or Exceeds NEMA ST-20 Standards
DOE Efficiency Isolation Transformer
Distribution Type Transformer
Built to UL-50 Standards
Seismic Qualified for Earthquake Loads
RoHS
CE Certified
Enclosed Circuit Breaker on Primary Side

Insulation: 220°C
Temperature Rise: 150°C
Sound Level: Meets NEMA ST-20 Standards
Enclosure Material: NEMA Type 3R Heavy Duty Ventilated - Steel
Finish: ANSI 61 Grey
Dimensions: (*Please note that dimensions are approximate and subject to change*) 26.88"-L x 31.9"-W x 35.47"-H
Weight: (*Please note that weight is approximate and subject to change*) 750 lb
Shipping Method: Pallet Freight - LTL
Shipping Weight: (*Please note that weight is approximate and subject to change*) 860 lb
Shipping Dimensions: (*Please note that dimensions are approximate and subject to change*) 48"-L x 40"-W x 48"-H

Special Orders - Special Requirements

Contact us for special requirements

Toll Free: 1-800-369-6671
Intl: 1-903-270-1187
Fax: 1-903-498-3364
E-mail: sales@larsonelectronics.com

The MPD-MT-K9-3P-480D-112.5KVA-415Y.240-N3R-ECB-M1 from Larson Electronics is a Three Phase 480V to 415Y/240 112.5 KVA K-9 Rated Isolation Transformer that is powerful, reliable, and designed with the environment in mind. Suitable for both indoor and outdoor applications, the MPD-MT-K9-3P-480D-112.5KVA-415Y.240-N3R-ECB-M1 provides increased reliability and protection against critical equipment failures. This 112.5 KVA isolation transformer is designed for distribution loads and potential seismic activity. The lower operating costs, lower heat emissions, and lower cost of ownership make this transformer ideal for a wide range of applications and businesses. This unit is equipped with a 200-amp enclosed circuit breaker on the primary side.

PLEASE NOTE: ANY FREE SHIPPING OFFERS DO NOT APPLY TO POWER DISTRIBUTION PANELS, TRANSFORMERS, OR SUBSTATIONS*

Transformer Features: The MPD-MT-K9-3P-480D-112.5KVA-415Y.240-N3R-ECB-M1 K-Factor transformer is a three phase transformer with a 112.5 KVA capacity rating. This isolation transformer is configured with an input voltage of 480V Delta 3-Phase AC on the primary side and an output voltage of 415Y/240 Wye-Neutral 3-Phase AC on the secondary side. Featuring robust construction, this unit's cores are manufactured with non-aging, cold-rolled silicon steel laminations using state of the art technology.

This unit boasts a low cost of ownership and is highly energy efficient. Lower heat emissions mean less cooling is needed as well. The standard NEMA Type 3R enclosure makes the unit suitable for both indoor and outdoor applications and is designed to be floor mounted. Wall mount brackets or additional mounting accessories can be purchased separately. This 500 KVA distribution transformer features 220°C insulation with a 150°C temperature rise.

Benefits: The MPD-MT-K9-3P-480D-112.5KVA-415Y.240-N3R-ECB-M1 480V to 415Y/240 general purpose transformer offers many benefits to the consumer. Precision cut aluminum transformer winding material help to improve performance. The close tolerances used during manufacturing also eliminates burrs which hinder performance. Each core is specially coated to prevent the ingress of moisture and are electrically balanced to minimize axial forces during short circuit situations.

This transformer provides owners with significant energy savings as well as offering environmental benefits. Higher efficiency not only extends the life of the transformer, but also turn into cost savings for owners in the form of lower energy bills and decreased cost of ownership. Integrated floor and wall mounting brackets make installation fast and easy and the offset outward facing floor installation holes allow for easy power tool access.

The MT-DOE series of transformers from Larson Electronics meet or exceed efficiency standards for United States and Canada. This results is overall lower cost of ownership throughout the life of the transformer.

Circuit Breaker: This transformer is equipped with enclosed circuit breaker on the primary side. This 200-amp rated circuit breaker allows the operator to field install shunt trip auxiliary contacts and EPO. The enclosed circuit breaker is protected from the elements via a steel weatherproof enclosure with drip shield and finished in an ANSI 70 light grey powder coating. Equipped with a hinged

locking door, the breaker carries a NEMA 3R rating for use in indoor or outdoor locations and protection from water, debris, corrosion, and external ice formation. The thru-door handle allows for lockout/tagout operations.

Safety: The MPD-MT-K9-3P-480D-112.5KVA-415Y.240-N3R-ECB-M1 is an isolation transformer which means that it provides operators with an increased level of protection against electric shock and injury. An isolation transformer can also suppress electrical noise in sensitive devices and transfer power between two circuits which must not be connected. The MPD-MT-K9-3P-480D-112.5KVA-415Y.240-N3R-ECB-M1 achieves these safety features by separating or "isolating" the powered device from the power source and insulation between the primary and secondary power sources.

Applications: Converting 480V local grid power to 415Y/240 for on-site equipment. This 112.5 KVA power transformer is ideal for sensitive equipment such as CNC equipment, computers, medical devices, ovens, or laboratory instruments.

Larson Electronics is a manufacturer and as such can build stationary and portable transformer systems to your specifications. Although we carry several models of power distribution transformer systems, we can deliver custom ordered units almost as quickly as our prebuilt units. If this model does not meet your needs, please contact us at 1-800-369-6671 or sales@larsonelectronics.com to discuss your specific requirements.

Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.498.3364


Frequently Asked Questions (FAQ)


Larson Electronics
1-800-369-6671

Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.498.3364



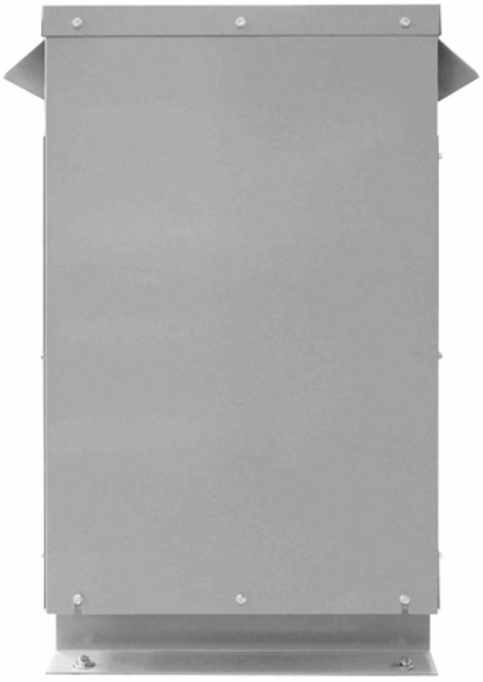

MPD-MT-K9-3P-480D-112.5KVA-415Y.240-N3R-ECB-M1

Product ID: 297324

Warranty: 6 Months

Export Control Classification Number (ECCN): EAR99

Links (Click on the below items to view):

- **HigResPic1**
- **HigResPic2**
- **HigResPic3**
- **HigResPic4**
- **ISO 9001 Certification**
- **Business Certificate**
- **Shipping Time Map**