

EXPCMR-WIP-RPS-OZ-2MP-IM.64G-M-24VDC

Explosion Proof Outdoor Security Camera - Wireless Video - 64GB Memory - 24 VDC Hard Wired Input

Product ID: 305743

Please see last page for supporting documentation for this product(certificates, CAD files & drawings, IES files, wiring diagrams, etc).



Larson Electronics LLC manufactures a wide variety of products, including custom built to spec designs. The pictures displayed for this unit are a general representation of form factor for the product line and may not accurately represent this exact configuration in every detail due to custom builds and changes between similar products in our standard catalog. The specifics for this configuration are listed in the specification table and supporting documentation (CAD files, Dimensional Drawing, Name Plate Diagram, Wiring Diagram, etc.). This means that specific details (receptacles, plugs, wires, connections, mounting brackets, external finishes, etc.) may not be accurately represented in images vs specifications. Please review specifications and do not order based solely on images.

EXPCMR-WIP-RPS-OZ-2MP-IM.64G-M-24VDC Explosion Proof Camera w/ Wireless Video Output

Unit Type: Explosion Proof 24VDC Camera

Dimensions: 18"-W x 8"-D x 6"-H

Weight: -

Supply Voltage: 24 V DC

Watts: 5W

Image Sensor: CMOS

Display Resolution: 1920 x 1080

Video Resolutions: 1080p (1920 x 1080), 720p (1280 x 720), VGA (640 x 480), QVGA (320 x 240)

Lens: 2.8-4mm Focal Length

Angle of View: Horizontal: 106°, Diagonal: 118° @ f = 2.8mm; Horizontal: 70°, Diagonal: 78° @ f = 4mm

Video Framerate: 30fps (60Hz), 25fps (50Hz), Downward Adjustable

Video Output: Wireless

Wireless Standard: IEEE802.11b / g / n

Data Rate: IEEE802.11b - 11Mbps (Max); IEEE802.11g - 54Mbps (Max); IEEE802.11n - 150Mbps (Max)

Frequency Bands: 2412 - 2472 MHz

Remote Access: Supports P2P & DDNS

Wireless Security: Supports WEP, WPA & WPA2

Maximum Power: 18dBm

Internal Memory: 64 GB Solid State - Removable SD Card (Only Remove in Non-Hazardous Locations)

Memory Recording Time: 8 Hours of Footage in 2MP 1600x1200 at 30 Frames per

Ratings/Approvals

Class I, Div 1 & 2 Groups B,C,D

Class I, Zones 1 & 2 Groups IIB+H2, IIA

Class II, Div 1 & 2 Groups E,F,G

Class III, Div 1 & 2

IECEX db IIC Gb

IECEX tb IIC Db IP66

ATEX Ex II 2 G / D

NEMA 3, 4, 4X, 7 (B, C, D), 9 (E, F, G)

30' Max Distance

Streaming via RTSP

Operates on 2.4 GHz Wifi

Special Orders - Special Requirements

Contact us for special requirements

Toll Free: 1-800-369-6671

Intl: 1-903-270-1187

Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671



www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.498.3364

Second

Housing Material: Aluminum

Mounting: Removable, Adjustable Trunnion Mounting Bracket

Fax: 1-903-498-3364


E-mail: sales@larsonelectronics.com

Frequently Asked Questions (FAQ)







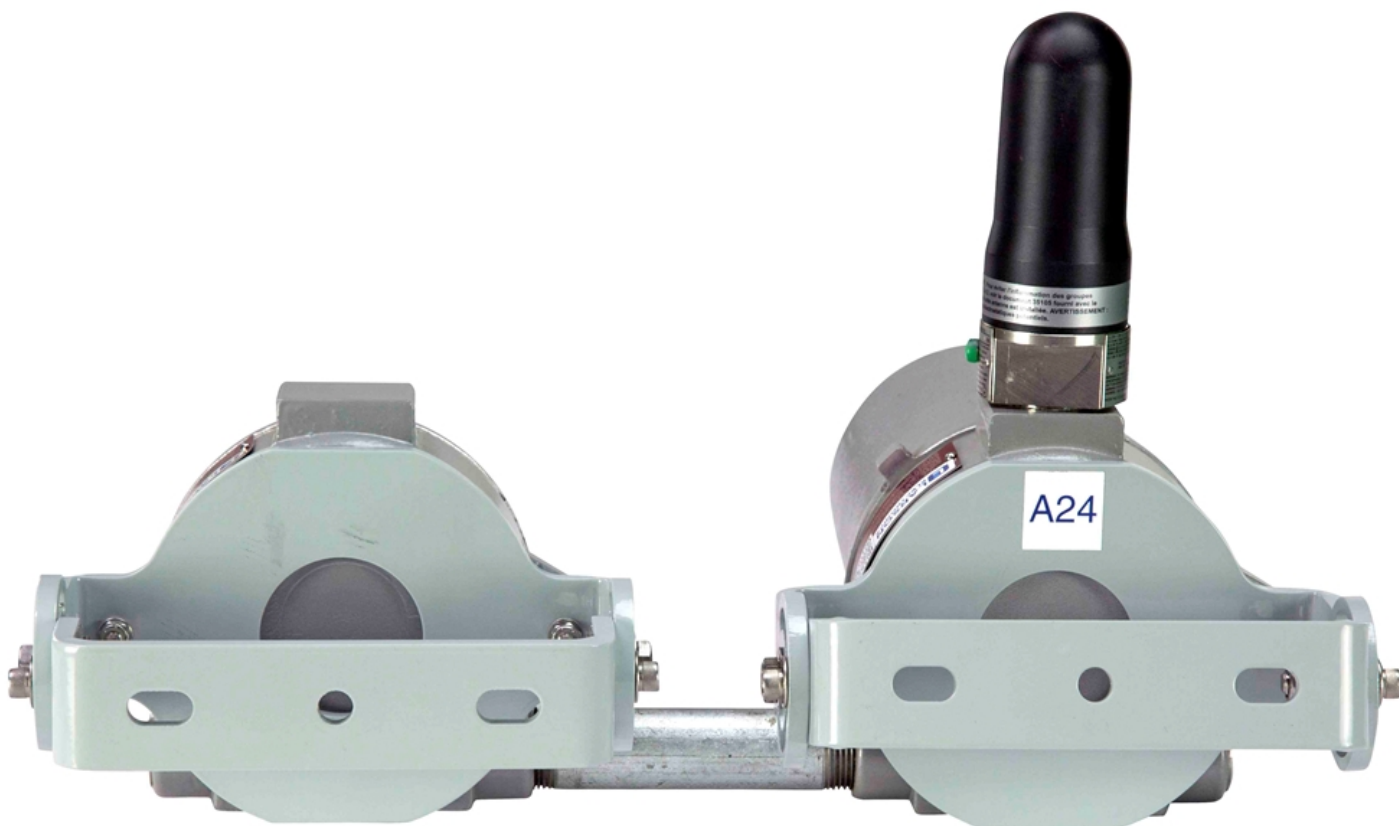

Export Control Classification Number (ECCN): EAR99

Links (Click on the below items to view):

- [HigResPic1](#)
- [HigResPic2](#)
- [HigResPic3](#)
- [HigResPic4](#)
- [HigResPic5](#)
- [HigResPic6](#)
- [HigResPic7](#)
- [HigResPic8](#)
- [HigResPic9](#)
- [Video1](#)
- [ISO 9001 Certification](#)
- [Business Certificate](#)
- [Shipping Time Map](#)