


MT-CT.3P-SC-600V-2000.5-5A-M1

5-Amp Current Transformer - 2000:5 Ratio - 3xSolid Core - Three Phase

Product ID: 306048

Please see last page for supporting documentation for this product(certificates, CAD files & drawings, IES files, wiring diagrams, etc).

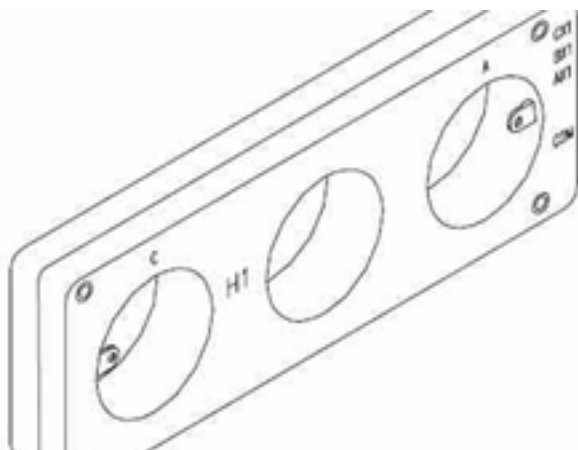

Larson Electronics LLC manufactures a wide variety of products, including custom built to spec designs. The pictures displayed for this unit are a general representation of form factor for the product line and may not accurately represent this exact configuration in every detail due to custom builds and changes between similar products in our standard catalog. The specifics for this configuration are listed in the specification table and supporting documentation (CAD files, Dimensional Drawing, Name Plate Diagram, Wiring Diagram, etc.). This means that specific details (receptacles, plugs, wires, connections, mounting brackets, external finishes, etc.) may not be accurately represented in images vs specifications. Please review specifications and do not order based solely on images.

MT-CT-.3P-SC-600V-2000.5-5A-M1 Solid Core Current Transformer

Type: 3 x Solid Core in the same frame

Phase: Three Phase

Frequency: 60 Hz

Output Current (A): 5

Maximum Voltage: 600 V

Winding Ratio: 2000:5

BIL Voltage: 10 kV

Insulation Class: 600 Volts, 10 kV BIL full wave.

Continuous Thermal Rating Factor: 1.0 at 30 °C ambient

Short Circuit Thermal: N/A

Operating Temperature: -20°C to +70°C

Relative Humidity: 0-90% (Non-Condensing)

Rated Dynamic Current: 2.55 x I_{ht}

Temperature Rise: 80°C

Relay Class: C200

Metering Class @ 60 Hz: 0.3 B1.8

Enclosure Material: Cast Resin

Mounting: Plug-In Metal Feet Compatible with Wall, Base, or Molded Busbar Mounting

Window Size: 2.63"-W x 8.25"-H

Overall Dimensions: 12.0"-H x 6.5"-W x 4.5"-D

Weight: 22 lbs

Approvals/Ratings

IEC/EN60044-1, BS7626 Compliant

Split Core Current Transformer

Special Orders - Special Requirements

Contact us for special requirements

Toll Free: 1-800-369-6671

Intl: 1-903-270-1187

E-mail: sales@larsonelectronics.com

The MT-CT.3P-SC-600V-2000.5-5A-M1 from Larson Electronics is a 600 V

Three Phase Solid Core Current Transformer that is powerful, reliable, and innovatively designed. The MT-CT.3P-SC-600V-2000.5-5A-M1 features a Three Current Transformer 2000:5 winding ratio that allows the current being used on a cable to be measured. This is an ideal solution for measuring and monitoring voltages being used on cables.


Transformer Features: With a 5-amp output current, the MT-CT.3P-SC-600V-2000.5-5A-M1 is a solid core three le phase current transformer with a maximum voltage of 600 V. Featuring compact and innovative construction with three cores in the same Frame, this unit's cores are manufactured with high-quality silicon steel laminations using state of the art technology.

This unit boasts a three split core design in the same frame that allows for easy hookup at the three wires of three phase system. There is no need to break the conductor which makes for a quicker and easier installation. This unit is compatible with wall mounting, base mounting, and molded busbar mounting. The unit also features an operating temperature range of -20°C to +70°C.

Applications: Voltage Monitoring, Switchgear, Distribution Systems, Generator Sets, Control Panels, Relaying

Larson Electronics is a manufacturer and as such can build stationary and portable transformer systems to your specifications. Although we carry several models of power distribution transformer systems, we can deliver custom ordered units almost as quickly as our prebuilt units. If this model does not meet your needs, please contact us at 1-800-369-6671 or sales@larsonelectronics.com to discuss your specific requirements.

Frequently Asked Questions (FAQ)

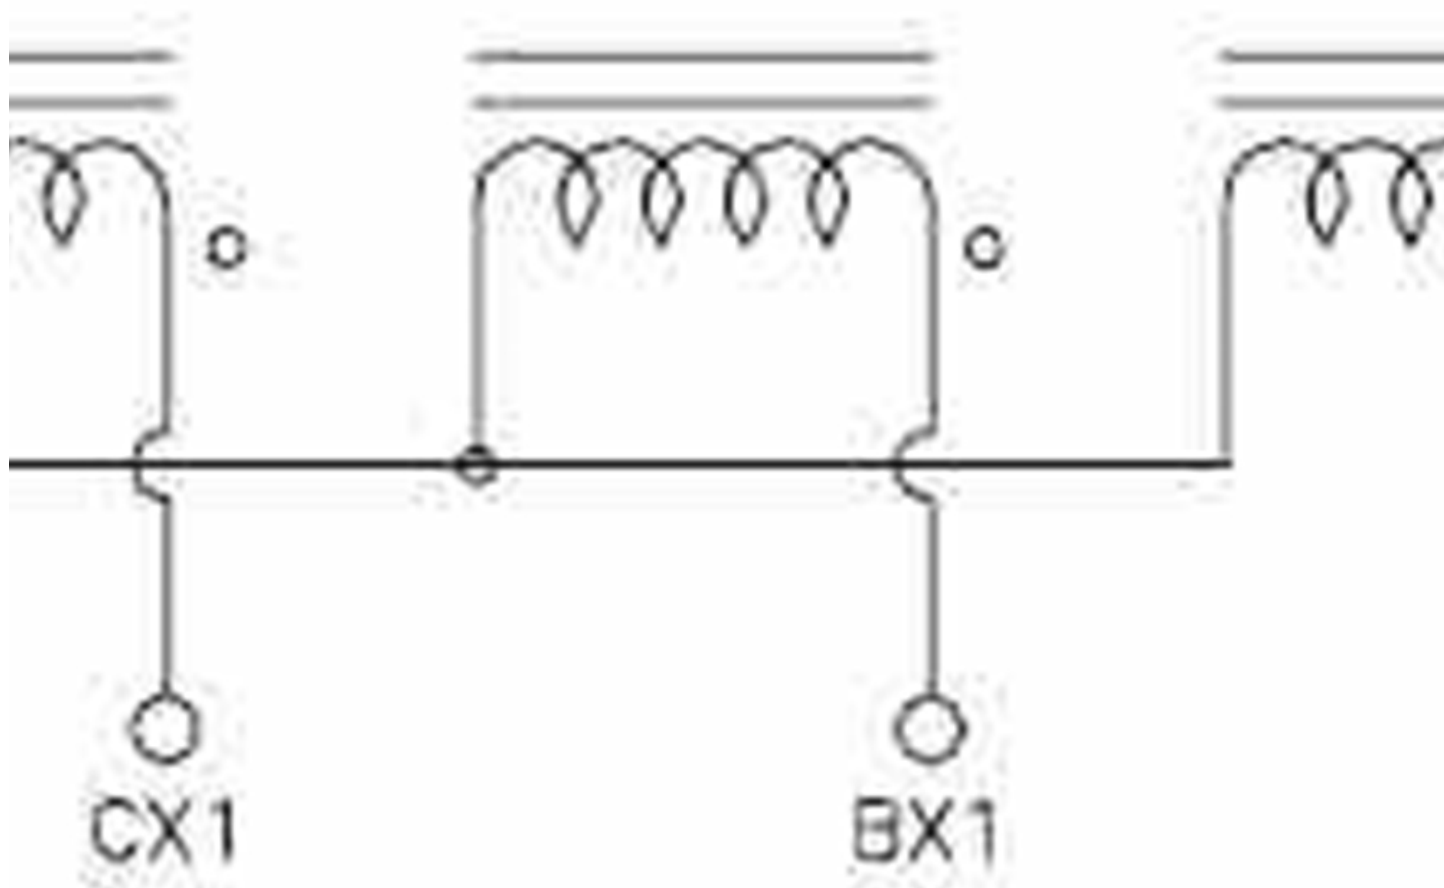



MT-CT.3P-SC-600V-2000.5-5A-M1

Product ID: 306048

Export Control Classification Number (ECCN): EAR99

Links (Click on the below items to view):

- [HigResPic1](#)
- [HigResPic2](#)
- [ISO 9001 Certification](#)
- [Business Certificate](#)
- [Shipping Time Map](#)