

MPD-CB-480Y.277-3P-400A-N3R-M1

400A Switchboard w/ 400A Main Circuit Breaker - 480Y/277 Wye-N 3PH, 4W, 60Hz - NEMA 3R - W/ Meter Door - W/ Pull Section - W/ Lug Landing Kit

Product ID: 316552

Please see last page for supporting documentation for this product(certificates, CAD files & drawings, IES files, wiring diagrams, etc).



Larson Electronics LLC manufactures a wide variety of products, including custom built to spec designs. The pictures displayed for this unit are a general representation of form factor for the product line and may not accurately represent this exact configuration in every detail due to custom builds and changes between similar products in our standard catalog. The specifics for this configuration are listed in the specification table and supporting documentation (CAD files, Dimensional Drawing, Name Plate Diagram, Wiring Diagram, etc.). This means that specific details (receptacles, plugs, wires, connections, mounting brackets, external finishes, etc.) may not be accurately represented in images vs specifications. Please review specifications and do not order based solely on images.

MPD-CB-480Y.277-3P-400A-N3R-M1 Industrial Switchboard

Unit Type: Switchboard with Main Circuit Breaker

System Nominal Voltage: 480Y/277 Wye-N, 3-phase, 4-wire, 60Hz

System Rated Voltage: 480Y/277

System Configuration: Wye configuration, solidly grounded.

System Ampacity: 400A

Main Bus Rating/Material: 400A, Copper

Line Bus Bar Qty/Dimensions: (2) 0.25x2.00 inches copper bars per phase/neutral

Wiring Type: Machine Tool Wire type

Bus Max Available Fault Current (RMS): 35 kAIC @ 480V max.

Grounding: Ground lug provided for each device; copper ground bus

Incomer Main Circuit Breaker Rating: (1) 400AT/400AF Magnetic Circuit Breaker

Meter Door: Included, 15" High, w/ (15) Jaws, w/ (1) Meter Socket, w/ (1) Test Block

Pull Section: Included, Underground Type, Outdoor, NEMA 3R, 26"-W x 26"-D

Lug Landing Kit: Included, 800A Rated, For the Underground Pull Section

Padlock Hasp: Included, Double Padlock Hasp for Mounting (2) Padlock on Rainproof Enclosure Door Handle

Incomer Current Transformer: Included, (1) 400:5 Ratio Per Each Phase

Max. Number of Spaces: (42)

Ratings/Features

NEMA Type 3R

Rodent Barrier

24V Trip Unit Display Power

Certified to UL Deadfront,
suitable for use as Service
Entrance

Complies with UL 891

Complies with National
Electric Code

Complies with NEMA PB-2

Outgoing Feeder Breakers: -

Protection: Ammeter Trip Unit, Long Time, Short Time, Instantaneous, Ground Fault, Over Current Trip Switch

Aux Contacts: (4) Form C

Thermostat: Included, Strip Type

Space Heaters: Included, Thermostatically Controlled

Terminal Blocks: Included

Contact Wear Indication: Visual

Enclosure Material: Coated Steel

Connection Type: Cable

Cable Entry: Top Feed

Handling: Rollers and rodent barriers

Installation Location: Outdoor

Enclosure Type/Rating: NEMA 3R free-standing

Enclosure Material: Coated Steel

Enclosure Paint Color: ANSI 49 Grey

Mounting Type: Floor Mounted

Dimensions: 36"W x 25.5"D x 90"H

Weight: -

Special Orders - Special Requirements

Contact us for special requirements

Intl: 1-903-270-1187

Toll Free: 1-800-369-6671

Fax: 1-903-498-3364

E-

mail: sales@larsonelectronics.com

Larson Electronics manufactures a wide variety of custom power distribution systems. The pictures displayed for this unit are a general representation of form factor and may not accurately represent this exact configuration in every detail due to being custom builds. The specifics for this configuration are listed in the specification table and one-line diagram.

The MPD-CB-480Y.277-3P-400A-N3R-M1 from Larson Electronics is a Switchboard with Main Circuit Breaker for power distribution systems. This 400-amp rated power distribution unit is compatible with three-phase 480Y/277 Wye-N 3PH 4W, 60Hz. The system is encased in a NEMA 3R enclosure that is painted ANSI 49.

The MPD-CB-480Y.277-3P-400A-N3R-M1 AC is designed for power distribution in industrial facilities. This 4-wire unit operates with three-phase 480Y/277V 3PH, 60Hz. With a 400-amp system ampacity, the switchboard has a 35 kA RMS short circuit rating, the circuit breaker has a 400-amp current rating and four, form c auxiliary contacts with visual contact wear indication. Protective features include: ammeter trip unit, long time, short time, instantaneous, ground fault, over current trip switch and rodent barrier. This system contains a 24V trip unit display power. The NEMA Type 3R unit comes with ground lugs and is painted ANSI 49.

Wiring: The MPD-CB-480Y.277-3P-400A-N3R-M1 accepts cable connections with a phase wire range of 3/0 - 750 kcmil.

Mount: The MPD-CB-480Y.277-3P-400A-N3R-M1 can be securely mounted to any flat surface. This non-walk-in system is accessible through the front with a left of lineup through the top entry point.

Applications: Residential and light commercial applications, air conditioning units and any other power distribution systems that require overload breaker protection.


At Larson Electronics, we do more than meet your lighting needs. We also provide replacement, retrofit, and upgrade parts as well as industrial grade power accessories. Our craftsmen can custom build any lighting system and/or accessories to fit the unique demands of your operation. A commitment to honesty, quality, and dependability has made Larson Electronics a leader in the lighting and electronics business since 1973. Contact us today at 800-369-6671 or message sales@larsonelectronics.com for more information about our custom options tailored to meet your specific industry needs.

Frequently Asked Questions (FAQ)







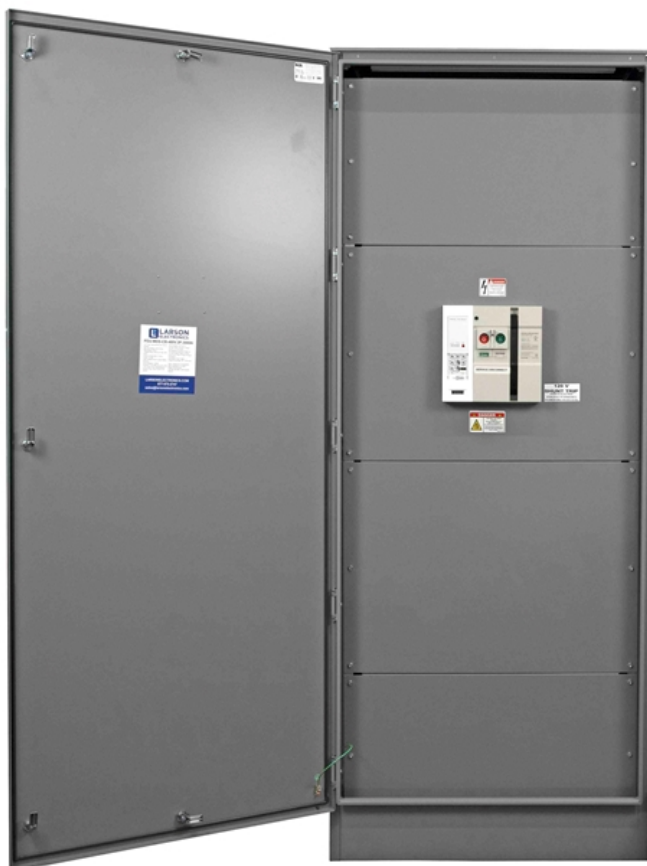

Export Control Classification Number (ECCN): EAR99

Links (Click on the below items to view):

- [HigResPic1](#)
- [HigResPic2](#)
- [HigResPic3](#)
- [HigResPic4](#)
- [HigResPic5](#)
- [HigResPic6](#)
- [HigResPic7](#)
- [HigResPic8](#)
- [Video1](#)
- [ISO 9001 Certification](#)
- [Business Certificate](#)
- [Shipping Time Map](#)