

XLE-PDU-CT-3P-DM-400A-660VAC

Definite Purpose Contactor - 660V AC Max Voltage, 48VAC/DC Coil Voltage - 400 Amps, 3-pole
Product ID: 319037

Please see last page for supporting documentation for this product(certificates, CAD files & drawings, IES files, wiring diagrams, etc).



Larson Electronics LLC manufactures a wide variety of products, including custom built to spec designs. The pictures displayed for this unit are a general representation of form factor for the product line and may not accurately represent this exact configuration in every detail due to custom builds and changes between similar products in our standard catalog. The specifics for this configuration are listed in the specification table and supporting documentation (CAD files, Dimensional Drawing, Name Plate Diagram, Wiring Diagram, etc.). This means that specific details (receptacles, plugs, wires, connections, mounting brackets, external finishes, etc.) may not be accurately represented in images vs specifications. Please review specifications and do not order based solely on images.

XLE-PDU-CT-3P-DM-400A-660VAC Contactor

Device Type: Definite Purpose Contactor

Dimensions: -

Weight: -

Line/Coil Voltage Rating: 660V AC Max, 48V AC/DC, 50/60Hz

Phase: 3PH

Thermal Current Rating: 450A

Operational Current Rating: 400A

Poles: 3-pole

Contacts: (4) Normally Open

Wire Temp Rating: 75°C

Configuration: A1/A2, L1, L2, L3/T1, T2, T3

Mount: Surface, Wall, Panel

Wiring: Contactors - Lugs

Larson Electronics manufactures a wide variety of custom power distribution systems. The pictures displayed for this unit are a general representation of form factor and may not accurately represent this exact configuration in every detail due to being custom builds. The specifics for this configuration are listed in the specification table and one-line diagram.

Ratings/Approvals

Industrial Contactor

Special Orders - Special Requirements

Contact us for special requirements

Intl: 1-903-270-1187

Toll Free: 1-800-369-6671

Fax: 1-903-498-3364

E-mail: sales@larsonelectronics.com

The XLE-PDU-CT-3P-DM-400A-660VAC from Larson Electronics is a Definite

Purpose Contactor for secure connections to circuits and motors in industrial sites. This 400-amp rated device is compatible with three-phase 660V AC @ 50/60Hz. Equipped with three, normally open contacts, operators can mount the unit on flat surfaces, walls or panels.


The XLE-PDU-CT-3P-DM-400A-660VAC facilitates electrical connections in industrial facilities. This 400-amp rated, 3-pole unit operates on 660V AC, 50/60Hz (maximum/coil voltage). Compatible with three-phase power, the industrial contactor features three, normally open contacts and a wire temperature rating of 75°C. Configuration on the unit includes: A1/A2, L1, L2, L3/T1, T2, T3. Operators can mount the device on flat surfaces, walls or panels.


Applications: HVAC systems, industrial motors, compressors, chemical processing, welding, heating equipment, manufacturing sites and more.


At Larson Electronics, we do more than meet your lighting needs. We also provide replacement, retrofit, and upgrade parts as well as industrial grade power accessories. Our craftsmen can custom build any lighting system and/or accessories to fit the unique demands of your operation. A commitment to honesty, quality, and dependability has made Larson Electronics a leader in the lighting and electronics business since 1973. Contact us today at 800-369-6671 or message sales@larsonelectronics.com for more information about our custom options tailored to meet your specific industry needs.

Frequently Asked Questions (FAQ)



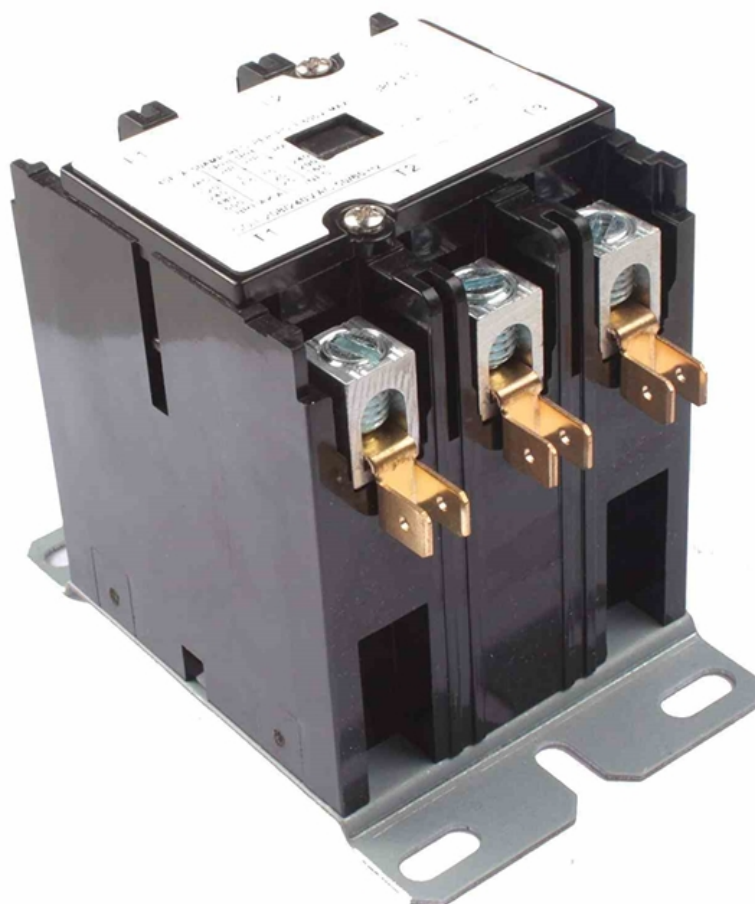

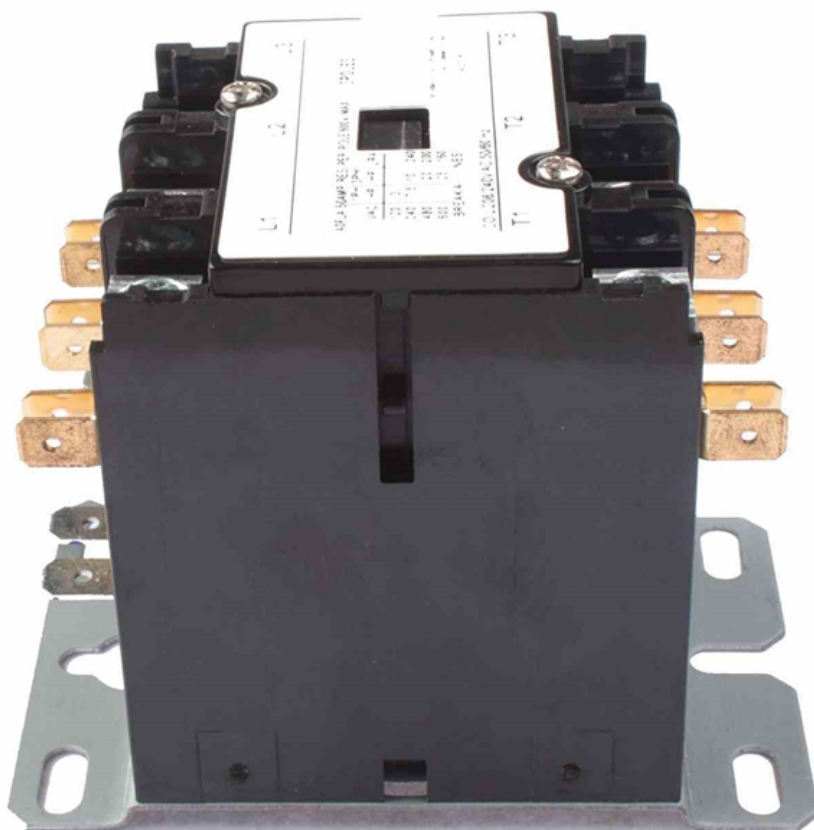

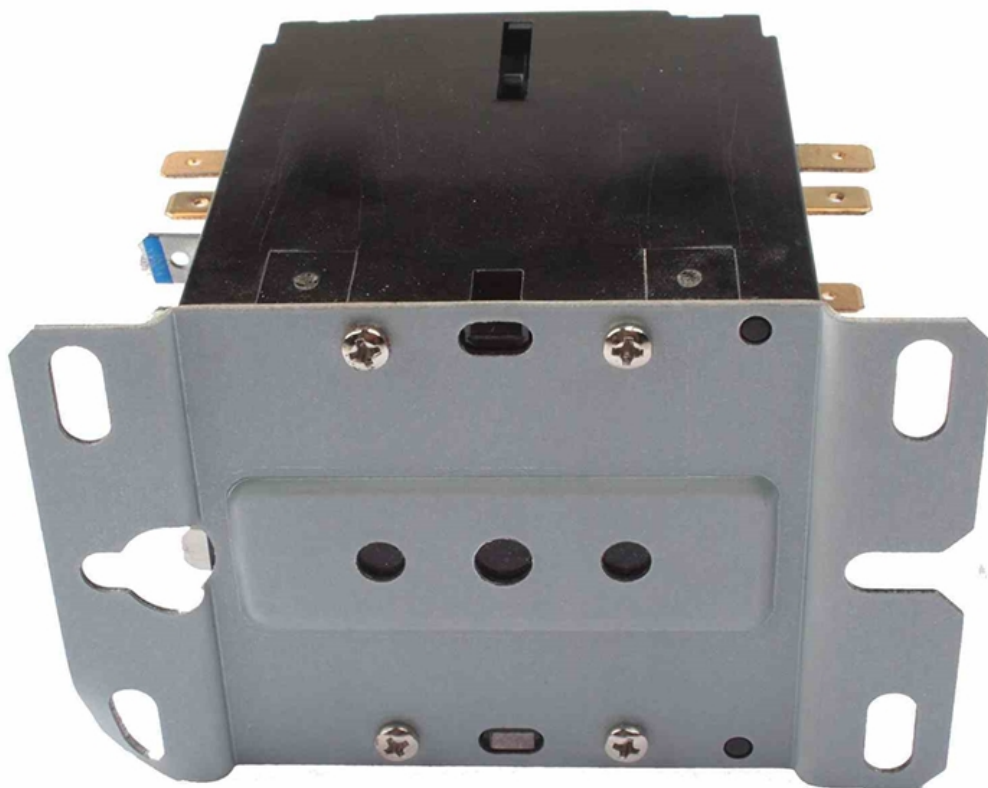

Export Control Classification Number (ECCN): EAR99

Links (Click on the below items to view):

- [HigResPic1](#)
- [HigResPic2](#)
- [HigResPic3](#)
- [HigResPic4](#)
- [HigResPic5](#)
- [ISO 9001 Certification](#)
- [Business Certificate](#)
- [Shipping Time Map](#)