Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.765.7664

MPD-CS1-NTL.30AB-SZ0-Z-2.L09-M1

Portable Spider Box, 120/240V 1PH, (2) L6-30R Outlets, L14-30FI Inlet, NEMA 3R

Product ID: 333033

Please see last page for supporting documentation for this product (certificates, CAD files & drawings, IES files, wiring diagrams, etc).



Image: MPD-CS1-NTL.30AB-SZ0-Z-2.L09-M1

Larson Electronics LLC manufactures a wide variety of products, including custom built to spec designs. The pictures displayed for this unit are a general representation of form factor for the product line and may not accurately represent this exact configuration in every detail due to custom builds and changes between similar products in our standard catalog. The specifics for this configuration are listed in the specification table and supporting documentation (CAD files, Dimensional Drawing, Name Plate Diagram, Wiring Diagram, etc.). This means that specific details (receptacles, plugs, wires, connections, mounting brackets, external finishes, etc.) may not be accurately represented in images vs specifications. Please review specifications and do not order based solely on images.

MPD-CS1-NTL.30AB-SZ0-Z-2.L09-M1 Spider Box

Line-in Cord: N/A
Line-in Cord Cap: L14-30FI NEMA Twist-Lock Male Inlet [125/250V]
Primary Voltage (V): 120/240V AC
Primary Phase (PH): 1-Phase (1PH)
Primary Frequency (HZ): 60 Hz (60-cycles)
Primary Panel: 120/240 1PH 30A MLO Yellow Spider Box N3R
Primary Breaker(s): (2) 30A 2P MCB [250V]
Primary Outlet(s): (2) L6-30R Twist Lock Receptacle [125/250V]
Primary Protection: MCB Circuit Breakers
Transformer (KVA): N/A
Secondary Voltage (V): N/A
Secondary Phase (PH): N/A
Secondary Frequency (HZ): N/A
Housing Material: Steel
Form Factor: Yellow Powder Coated Spider Box w/ Rubber Feet
Mounting: Portable/Base Stand
Dimensions: (*Please note that dimensions are approximate and subject to change*) 11" x 21" x 14.5"
Weight: (*Please note that weight is approximate and subject to change*) 29 lb

Larson Electronics manufactures a wide variety of custom power distribution systems. The pictures displayed for this unit are a general representation of form factor and may not

Ratings/Approvals

Max Primary OCP: 30A @ 240V
Max Secondary Output: -
NEMA 3R Weatherproof
Overload Protection
Short Circuit Protection

Special Orders - Special Requirements

Contact us for special requirements
Toll Free: 1-800-369-6671
Intl: 1-214-616-6180
Fax: 1-903-765-7664
E-mail: sales@larsonelectronics.com

*All grounding shall comply with state and local codes and meet the minimum requirements of the National Electronic

accurately represent this exact configuration in every detail due to being custom builds. The Code section 250* specifics for this configuration are listed in the specification table and one-line diagram.

This unit is Made In USA - Manufactured in Texas

The MPD-CS1-NTL.30AB-SZ0-Z-2.L09-M1 from Larson Electronics is a Portable Spider Box for indoor applications. The device supports a L14-30FI twist-lock male inlet and six outlets for powering equipment. For robust protection, the safety yellow spider box is NEMA 3R rated and protected by impact/flame resistant weatherproof covers.

Operation:

• Primary Voltage: 120/240V AC 1PH

• Primary Panel: 120/240 1PH 30A MLO Yellow Spider Box N3R

• Primary Breaker(s): (2) 30A 2P MCB [250V]

• Primary Outlet(s): (2) L6-30R Twist Lock Receptacle [125/250V]

• Transformer: N/A

• Secondary Voltage: N/A

• Secondary Panel: N/A

• Secondary Breaker(s): N/A

• Secondary Outlet(s): N/A

*See specification table at the top of the page for more information about the power distribution system.

The housing on the MPD-CS1-NTL.30AB-SZ0-Z-2.L09-M1 is constructed of steel with a NEMA 3R enclosure rating. This safety yellow device is approved for wet locations and features heavy-duty impact/flame resistant weatherproof covers. Rubber feet at the base of the unit and low center of gravity ensures this spider box does not tip over in the field.

Certification: All units are built in accordance to NFPA 70 (National Electric Code). All equipment is NEMA 3R rated for indoor and outdoor use and provide a degree of protection against dirt, water, and ice. NEMA 4 and NEMA 4x equipment can be equipped upon request.

Applications: Indoor or outdoor applications including but not limited to, construction sites, plant maintenance, plant turnarounds, shows, exhibits, and shipyard operations. These units are popularly used in applications where external power sources are often necessary. We also offer class rated transformers for use within explosion proof and hazardous location environments.

Larson Electronics is a manufacturer and we can build portable power distribution systems to your specifications. Although we carry several models of portable power distribution systems in stock, we can deliver custom ordered units almost as quickly as our prebuilt units. If this model does not meet your needs, please contact us at 1-800-369-6671 or

sales@larsonelectronics.com to discuss your specific requirements.

Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.765.7664

Frequently Asked Questions (FAQ)

There are no Faqs

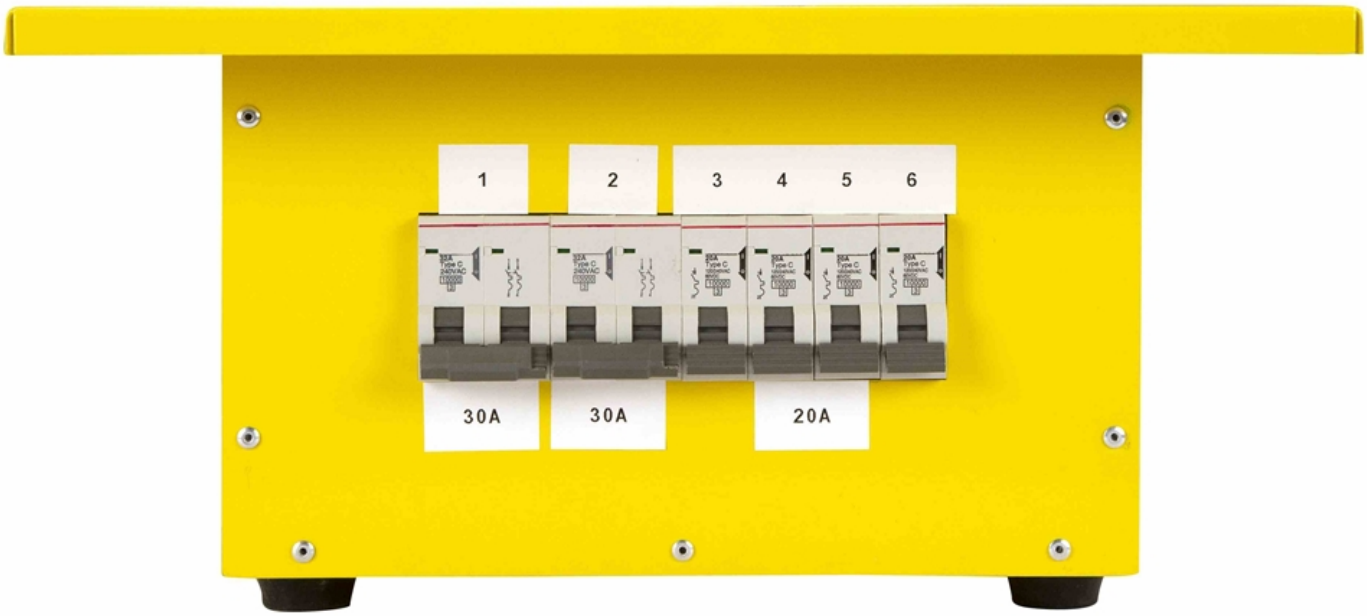


Image: MPD-CS1-NTL.30AB-SZ0-Z-2.L09-M1

Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.765.7664



Image: MPD-CS1-NTL.30AB-SZ0-Z-2.L09-M1

Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.765.7664



Image: MPD-CS1-NTL.30AB-SZ0-Z-2.L09-M1

Export Control Classification Number (ECCN): EAR99

Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.765.7664

Links (Click on the below items to view):

- **ANSI Certificate 1**(https://www.larsonelectronics.com/images/product/ANSICert1/333033.PDF)
- **Canadian CEC Certificate (Commonly referred to as CSA Certificate)**(https://www.larsonelectronics.com/images/product/CECCert/333033.PDF)
- **Catalog Page - Product Series**(https://www.larsonelectronics.com/images/product/CatalogPage/333033.PDF)
- **CE Certificate**(https://www.larsonelectronics.com/images/product/CECert/333033.PDF)
- **Certificate 1, Misc**(https://www.larsonelectronics.com/images/product/Cert1/333033.PDF)
- **Certificate 2, Misc**(https://www.larsonelectronics.com/images/product/Cert2/333033.PDF)
- **Certificate 5, Misc**(https://www.larsonelectronics.com/images/product/Cert5/333033.PDF)
- **MSDS (Material Safety Data Sheet**(https://www.larsonelectronics.com/images/product/Msds/333033.PDF)
- **RoHS Certificate (Restriction of Hazardous Substances)**(https://www.larsonelectronics.com/images/product/RoHSCert/333033.PDF)
- **Single Line Diagram (One-Line Diagram)**(https://www.larsonelectronics.com/images/product/Oneline/333033.PDF)
- **USA NEC Certificate (Commonly referred to as UL Certificate)**(https://www.larsonelectronics.com/images/product/NECCert/333033.PDF)
- **Wiring Diagram**(https://www.larsonelectronics.com/images/product/WiringDiagram/333033.PDF)
- **HigResPic1**(https://www.larsonelectronics.com/images/product/HigResPic1/333033.JPG)
- **HigResPic2**(https://www.larsonelectronics.com/images/product/HigResPic2/333033.JPG)
- **HigResPic3**(https://www.larsonelectronics.com/images/product/HigResPic3/333033.JPG)
- **HigResPic4**(https://www.larsonelectronics.com/images/product/HigResPic4/333033.JPG)
- **Video1**(https://www.youtube.com/watch?v=1S-T6kqZndQ)
- **ISO 9001 Certification**(http://larsonelectronics.com/images/pdfdocs/ISO9001.PDF)
- **Business Certificate**(https://www.larsonelectronics.com/images/pdfdocs/w9.PDF)
- **Shipping Time Map**(https://www.larsonelectronics.com/images/product/ShippingTimeMap/ShippingTimeMap.pdf)