Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.765.7664

MT-PML-R7-1P-GNB-75KVA-SLZ-LT-DF-A6-BB-CS-2C4-M1

75 KVA Pad Mount Transformer - 8320Y/4800 Grounded Wye Primary, 120/240V Secondary - Biodegradable Fluid /KNAN - 304 Stainless Steel - Bell Green

Product ID: 335421

Please see last page for supporting documentation for this product (certificates, CAD files & drawings, IES files, wiring diagrams, etc).



Image: MT-PML-R7-1P-GNB-75KVA-SLZ-LT-DF-A6-BB-CS-2C4-M1

Larson Electronics LLC manufactures a wide variety of products, including custom built to spec designs. The pictures displayed for this unit are a general representation of form factor for the product line and may not accurately represent this exact configuration in every detail due to custom builds and changes between similar products in our standard catalog. The specifics for this configuration are listed in the specification table and supporting documentation (CAD files, Dimensional Drawing, Name Plate Diagram, Wiring Diagram, etc.). This means that specific details (receptacles, plugs, wires, connections, mounting brackets, external finishes, etc.) may not be accurately represented in images vs specifications. Please review specifications and do not order based solely on images.

MT-PML-R7-1P-GNB-75KVA-SLZ-LT-DF-A6-BB-CS-2C4-M1 Pad Mount Transformer

Phase: Single Phase
Capacity: 75 KVA
Primary Voltage: 8320Y/4800 V
Primary Voltage Class: 15 KV
Primary BIL: 95 KV
Secondary Voltage: 120/240V (L-N-L)
Secondary Voltage Class: 1.2 KV
Secondary BIL: 30 KV
Frequency: 60 Hz
Temperature Rise: 65°C
Forced Air (Fans): None
Tap Changer: 5-position De-Energized Tap Changer, Externally Operated, Manual Type
Tap Qty: (2) FCAN Above Taps, (2) FCBN Below Taps
Tap %: 2.5%
Impedance: 1.0-4.5% Typical, 2.87% Target
Primary Insulation: 200 A, 15 kV Class, 95 kV BIL Universal Bushing Wells
Secondary Connections: NEMA 4-Hole Spade Terminals
Efficiency: 99.19 dBA, Meet DOE 2016 Standard
Insulation Fluid: Biodegradable Natural Vegetable Oil Ester Insulating Fluid - Non-PCB Fluid

Ratings

Complies with ANSI / IEEE #C57.12.25
Penta-head Entry Assembly

Load Losses Based on 85°C Reference Temp.
No Load Loss (in watts): +/- 247W
Full Load Loss (in watts): +/- 845W
Total Load Loss (in watts): +/- 1,092W
Note: *Losses offered are typical only, not guaranteed*

Fluid Capacity: 66 Gallons
Cooling Class: KNAN; Self Cooled
Liquid Level Gauge: Analog
Temperature Gauge: Analog
Pressure/Vacuum Gauge: Analog
Pressure Relief Device: Included
Internal Fault Detector (IFD): Included
Fill Valve: Included
Drain Valve w/ Sampler: Included
Surge Arrestors: Included, 15 kV Class, fully shielded, dead-front metal-oxide-varistor, elbow type with resistance-graded gap suitable for plugging into inserts
Protection Fuses: Bayonet oil-immersed, expulsion fuses (10A, 150 kV) in series with oil-immersed, partial-range, current-limiting fuses (50 kA symmetrical interrupting rating)
Load Break Switch: (1) 4-position Load Break Switch
Front: Dead Front Primary, Live Front Secondary
Feed: Loop
Winding Material: Copper
Ambient Temperature Rating: 40ºC
Sound Level: 51 dBA, Complies with NEMA TR 1
Housing: 304 Stainless Steel, Tamper Resistant w/ Pad-lockable Lift-up Lid
Paint Type: Munsell™ 7GY 3.29/1.5 Bell Green
Mounting: Pad Mount
Conduit Opening: Bottom Feed
Dimensions: 37.4"-W x 45.67"-D x 29.53"-H
Weight: 1,499.12 Lbs

Special Orders - Special Requirements
Contact us for special requirements
Toll Free: 1-800-369-6671
Intl: 1-903-270-1187
Fax: 1-903-765-7664
E-mail: sales@larsonelectronics.com

The MT-PML-R7-1P-GNB-75KVA-SLZ-LT-DF-A6-BB-CS-2C4-M1 Industrial Pad Mount Transformer from Larson Electronics offers powerful, reliable and efficient power distribution in indoor, outdoor and public locations. The low operating costs, low heat emissions and low cost of ownership make this transformer ideal for a wide range of applications and businesses. An enclosed design caters to installations on concrete pads without protective fencing.

PLEASE NOTE: ANY FREE SHIPPING OFFERS DO NOT APPLY TO POWER DISTRIBUTION PANELS, TRANSFORMERS, OR SUBSTATIONS*

Transformer Features: With a transformer rating of 75 KVA, the industrial transformer features a primary voltage of single-phase 8320Y/4800V Grounded Wye and a secondary voltage of single-phase 120/240V. The unit has a primary loop feed and dead-front primary connections. We also offer systems with radial feed and dead front primary/live front secondary connections. This pad mount transformer features primary well bushings and standard spade connectors on the secondary side. Equipped with copper windings, this transformer consists of one coil and two core loops.

The MT-PML-R7-1P-GNB-75KVA-SLZ-LT-DF-A6-BB-CS-2C4-M1 is air cooled and does not have fans or mounting provision for fans. This unit features a 65°C temperature rise for reduced heat waste, increased reliability and longer life. The transformer meets DOE 2016 efficiency standards. The combination of low temperature rise and high efficiency makes this unit suitable for use in electrical rooms, air conditioned spaces in buildings, underground vaults and similar locations, in addition to outdoor areas.

Insulation Fluid: The MT-PML-R7-1P-GNB-75KVA-SLZ-LT-DF-A6-BB-CS-2C4-M1 features biodegradable insulation fluid. We offer transformers with FR-3 oil fluid, if needed.

Gauges: The following gauges are included with the system: liquid level, temperature and pressure/vacuum gauges. Standard liquid level, temperature and pressure/vacuum gauges are analog, manual reading types. These gauges do not have auxiliary contacts.

Fault Pressure Devices: This transformer features an automatic action fault pressure device. Fault pressure devices are used to detect high rates of pressure rise within the tank.

Rapid Rise Relay: There are no rapid rise relays on the unit. This safety component is designed for protection when a rapid increase in tank pressure occurs. The relay is suitable for detecting sudden pressure fluctuations above predetermined safe limits.

Surge arresters: This system comes with high elbow surge arresters on the primary side. Designed for over-voltage and transient voltage protection, the components prevent damage caused by lightning, internal switching or voltage surges. We can offer models without high elbow surge arresters that have mounting provisions for customer-provided surge arresters.

Load Breaker Switch: The MT-PML-R7-1P-GNB-75KVA-SLZ-LT-DF-A6-BB-CS-2C4-M1 is equipped with a load break switch. This switch has four positions: A side on + transformer on, B side on + transformer on, A and B sides + transformer on, and A and B sides + transformer off.

Valves: The MT-PML-R7-1P-GNB-75KVA-SLZ-LT-DF-A6-BB-CS-2C4-M1 is equipped with a fill valve and drain valve with sampler port.

Protection Fuses: This transformer contains bayonet protection fuses on the primary side. For units without protection fuses, upstream protection is provided. We recommend provisions for protection fuses when possible, as blown fuses may require more frequent oil changes.

Mount: The heavy-duty enclosure makes the unit suitable for both indoor and outdoor applications. This power distribution system can be pad mounted on concrete pads.

Benefits: The MT-PML-R7-1P-GNB-75KVA-SLZ-LT-DF-A6-BB-CS-2C4-M1 pad mount transformer offers many benefits to consumers. This transformer provides owners with significant energy savings, as well as offering environmental benefits. Higher efficiency not only extends the life of the transformer, but also turns into cost savings for owners in the form of lower energy bills and decreased cost of ownership.

Applications: General purposes, industrial sites, electrical rooms, underground vaults, manufacturing facilities, steel plants, offshore, commercial, military, processing plants, electric power distribution, utilities, public locations and more.

Larson Electronics is a manufacturer and as such can build stationary and portable transformer systems to your specifications. Although we carry several models of power distribution transformer systems, we can deliver custom ordered units almost as quickly as our prebuilt units. If this model does not meet your needs, please contact us at 1-800-369-6671 or sales@larsonelectronics.com to discuss your specific requirements.

Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.765.7664

Frequently Asked Questions (FAQ)

There are no Faqs

Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.765.7664



Image: MT-PML-R7-1P-GNB-75KVA-SLZ-LT-DF-A6-BB-CS-2C4-M1

Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.765.7664

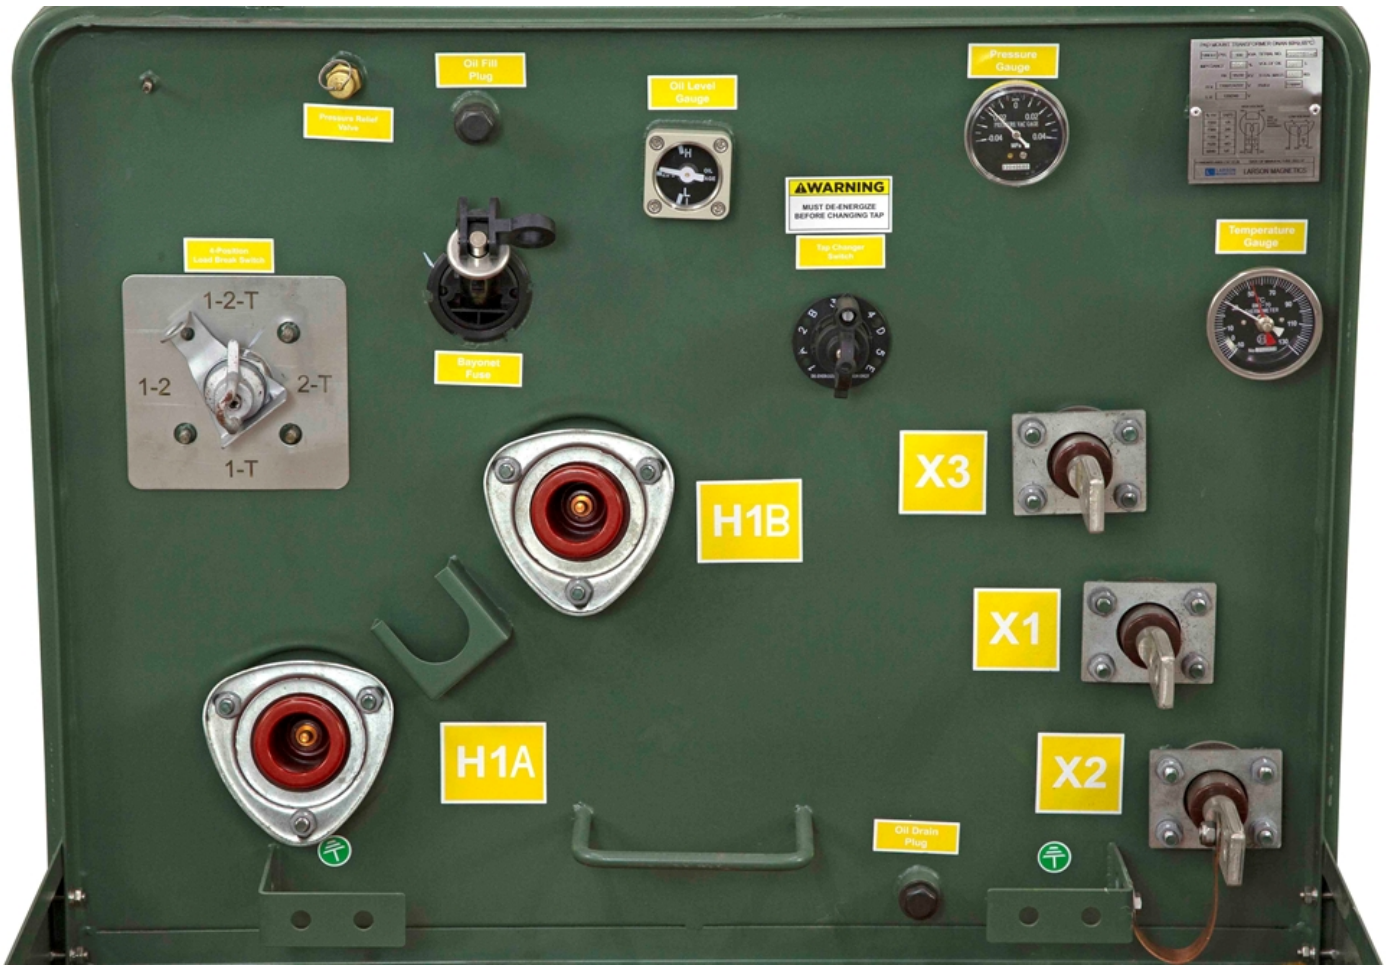


Image: MT-PML-R7-1P-GNB-75KVA-SLZ-LT-DF-A6-BB-CS-2C4-M1

Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.765.7664



Image: MT-PML-R7-1P-GNB-75KVA-SLZ-LT-DF-A6-BB-CS-2C4-M1

Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.765.7664



Image: MT-PML-R7-1P-GNB-75KVA-SLZ-LT-DF-A6-BB-CS-2C4-M1

Export Control Classification Number (ECCN): EAR99

Links (Click on the below items to view):

- **HigResPic1**(https://www.larsonelectronics.com/images/product/HigResPic1/335421.JPG)
- **HigResPic2**(https://www.larsonelectronics.com/images/product/HigResPic2/335421.JPG)
- **HigResPic3**(https://www.larsonelectronics.com/images/product/HigResPic3/335421.JPG)
- **HigResPic4**(https://www.larsonelectronics.com/images/product/HigResPic4/335421.JPG)
- **HigResPic5**(https://www.larsonelectronics.com/images/product/HigResPic5/335421.JPG)
- **Video1**(https://www.youtube.com/watch?v=e8n6aQZ2CNY)
- **Video2**(https://www.youtube.com/watch?v=YBY4x0CofvU)
- **Video3**(https://www.youtube.com/watch?v=mpt7J5hdJp8)
- **Video4**(https://www.youtube.com/watch?v=mN2qPmdLwW4)
- **ISO 9001 Certification**(http://larsonelectronics.com/images/pdfdocs/ISO9001.PDF)
- **Business Certificate**(https://www.larsonelectronics.com/images/pdfdocs/w9.PDF)
- **Shipping Time Map**(https://www.larsonelectronics.com/images/product/ShippingTimeMap/ShippingTimeMap.pdf)