Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.765.7664

Product ID: 338043

Please see last page for supporting documentation for this product (certificates, CAD files & drawings, IES files, wiring diagrams, etc).



Image:

Larson Electronics LLC manufactures a wide variety of products, including custom built to spec designs. The pictures displayed for this unit are a general representation of form factor for the product line and may not accurately represent this exact configuration in every detail due to custom builds and changes between similar products in our standard catalog. The specifics for this configuration are listed in the specification table and supporting documentation (CAD files, Dimensional Drawing, Name Plate Diagram, Wiring Diagram, etc.). This means that specific details (receptacles, plugs, wires, connections, mounting brackets, external finishes, etc.) may not be accurately represented in images vs specifications. Please review specifications and do not order based solely on images.

MPD-DS-WML-ATS-4P-4W-250V-1000A-DF-BM-N3R-M1 Auto Transfer Switch

Unit Type: Auto Transfer Switch
Line-In: N/A (customer provided)
Line-In Cord Cap: N/A (customer provided)
Line-In Connections: Terminal Lugs
Line-In Orientation: Bottom Feed
Voltage (V): 250V DC (Ungrounded System)
Phase (PH): -
Frequency (Hz): -
Poles: 4-pole
Operating Cycles: -
Operating Torque (lbs.in/Nm): 442.5/50
Auxiliary Contacts: N/A, Ready to Accept Contacts (customer provided)
Fuse Type: N/A (customer provided)
Protection Method: N/A (customer provided)
Protection Type: N/A (customer provided)
Protection Ampacity: N/A
Rated Current (Amps): 1000A
SCCR: 30kA
Horsepower (Standard): N/A
Max Motor Full Load Amps Rating: N/A
Changeover Means: Automatic
Neutral Connection: -
Line-Out: N/A (customer provided)
Line-Out Cord Cap: N/A (customer provided)

Ratings

NRTL Listed Service Equipment
NRTL Listed to UL 1008
NRTL Listed to UL 98
CSA-C22.2 No. 4 Class 4651-02
NEMA 3R Rated for Indoor and Outdoor Use
Made in the USA

Line-Out Connection: Terminal Lugs
Line-Out Orientation: Bottom Feed
Maximum Connection (AWG): (4) 600 MCM
Minimum Connection (AWG): (4) #2
Operating Temperature: -4°F to +122°F (-20°C to +50°C)
Form Factor: Rectangular, Slim-profile Enclosure w/ Lockable Door
Door: (1) Left Hinged Door w/ Pad Lockable Handle
Enclosure Material: 11GA Sheet Steel
Enclosure Finish: ANSI 49 Grey
Enclosure Type: NEMA 3R Ventilated
Mount: Wall Mount
Dimensions: 23.69"-L x 62.67"-H x 35.8"-W
Weight: -
Shipping Dimensions: -
Shipping Weight: -

Larson Electronics manufactures a wide variety of custom power distribution systems. The pictures displayed for this unit are a general representation of form factor and may not accurately represent this exact configuration in every detail due to being custom builds. The specifics for this configuration are listed in the specification table and one-line diagram.

Special Orders - Special Requirements

Contact us for special requirements
Toll Free: 1-800-369-6671
Intl: 1-903-270-1187
Fax: 1-903-765-7664
E-mail: sales@larsonelectronics.com

All grounding shall comply with state and local codes and meet the minimum requirements of the National Electronic Code section 250

Made in the USA

The Larson Electronics MPD-DS-WML-ATS-DC-4P-4W-250V-1000A-DF-BM-N3R-M1 Auto Transfer Switch enables changing between two power sources while feeding a single load at industrial work sites. Designed for wall mounting installations, the auto transfer switch is protected by a NEMA 3R rated, steel enclosure with a ventilated design.

PLEASE NOTE: ANY FREE SHIPPING OFFERS DO NOT APPLY TO POWER DISTRIBUTION PANELS, TRANSFORMERS, OR SUBSTATIONS*

The MPD-DS-WML-ATS-DC-4P-4W-250V-1000A-DF-BM-N3R-M1 auto transfer switch provides a safe and reliable way for operators in industrial settings to utilize two power sources to feed a single load. Compatible with 250V DC ungrounded systems, the switch features an auto operating handle for changeover. This 4-pole unit is rated for 1000 amps and carries a 30kA SCCR rating.

Operation: The switch features a locking door. The door provides access to a permanently attached operating handle, which is used for automatic changeover.

Contacts: Auxiliary contacts can be added to the assembly, which can be used for remote monitoring and notification of power failure, indicating operators that they need to change over.

Enclosure Design: The auto transfer switch is protected by an 11GA sheet steel enclosure with ANSI 49 grey finish. A ventilated design promotes natural cooling and improves performance. The enclosure is NEMA 3R rated for protection against water, moisture and debris. This rating allows the unit to be used in indoor and outdoor areas.

Certification: This switch is NRTL listed to UL 98 and UL 1008, as well as NRTL listed for service equipment.

Mount: Operators can mount the system on walls.

Customization: The MPD-DS-WML-ATS-DC-4P-4W-250V-1000A-DF-BM-N3R-M1 can be

customized to meet specific operating and power requirements. Example of customizations include:

• Making the non-fused system portable and certified to NRTL UL 1640 for portable equipment

• Adding single pole camlock connectors for quick connections

• Adding heaters for cold environments

• Aiding alarm relays for trip notification downstream

• Adding power meters

Applications: This auto transfer switch is suitable for indoor/outdoor use and applications including, but not limited to, construction sites, plant maintenance, plant turnarounds, hazardous location operations, shows, exhibits, and shipyard operations.

At Larson Electronics, we do more than meet your lighting needs. We also provide replacement, retrofit, and upgrade parts as well as industrial grade power accessories. Our craftsmen can custom build any lighting system and/or accessories to fit the unique demands of your operation. A commitment to honesty, quality, and dependability has made Larson Electronics a leader in the lighting and electronics business since 1973. Contact us today at 800-369-6671 or message sales@larsonelectronics.com for more information about our custom options tailored to meet your specific industry needs.

Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.765.7664

Frequently Asked Questions (FAQ)

There are no Faqs

Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.765.7664



Image:

Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.765.7664

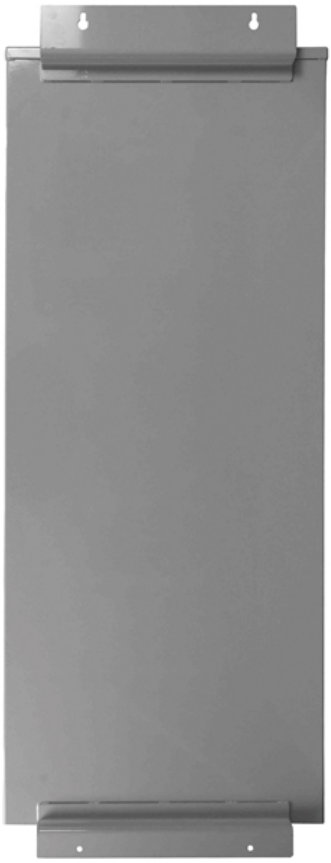


Image:

Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.765.7664

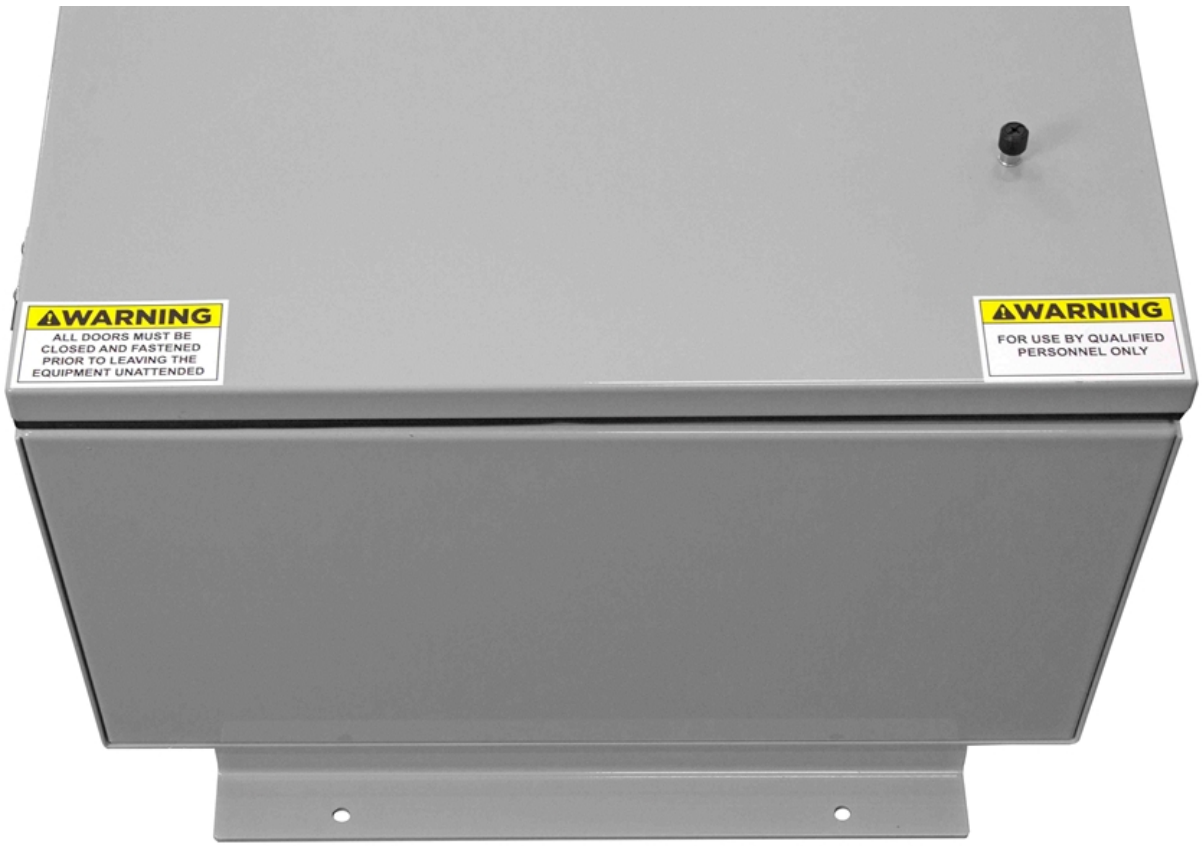


Image:



Image:

Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.765.7664

Product ID: 338043

Export Control Classification Number (ECCN): EAR99

Links (Click on the below items to view):

- **HigResPic1**(https://www.larsonelectronics.com//images/product/HigResPic1/338043.JPG)
- **HigResPic2**(https://www.larsonelectronics.com//images/product/HigResPic2/338043.JPG)
- **HigResPic3**(https://www.larsonelectronics.com//images/product/HigResPic3/338043.JPG)
- **HigResPic4**(https://www.larsonelectronics.com//images/product/HigResPic4/338043.JPG)
- **HigResPic5**(https://www.larsonelectronics.com//images/product/HigResPic5/338043.JPG)
- **ISO 9001 Certification**(http://larsonelectronics.com/images/pdfdocs/ISO9001.PDF)
- **Business Certificate**(https://www.larsonelectronics.com/images/pdfdocs/w9.PDF)
- **Shipping Time Map**(https://www.larsonelectronics.com/images/product/ShippingTimeMap/ShippingTimeMap.pdf)