

MT-PML-R7-1P-DMR-25KVA-SLZ-LT-DF-A6-BB-CS-2C4-M1

25 KVA Pad Mount Transformer - 12470V Delta Primary, 120/240V Secondary - Biodegradable Fluid /KNAN - Bell Green

Product ID: 338207

Please see last page for supporting documentation for this product (certificates, CAD files & drawings, IES files, wiring diagrams, etc).



Image: MT-PML-R7-1P-DMR-25KVA-SLZ-LT-DF-A6-BB-CS-2C4-M1

Larson Electronics LLC manufactures a wide variety of products, including custom built to spec designs. The pictures displayed for this unit are a general representation of form factor for the product line and may not accurately represent this exact configuration in every detail due to custom builds and changes between similar products in our standard catalog. The specifics for this configuration are listed in the specification table and supporting documentation (CAD files, Dimensional Drawing, Name Plate Diagram, Wiring Diagram, etc.). This means that specific details (receptacles, plugs, wires, connections, mounting brackets, external finishes, etc.) may not be accurately represented in images vs specifications. Please review specifications and do not order based solely on images.

MT-PML-R7-1P-DMR-25KVA-SLZ-LT-DF-A6-BB-CS-2C4-M1 1PH Pad Mount Transformer

Transformer Type: Pad Mounted, Compartmental-Type I

Transformer Configuration: Liquid Filled Pad Mounted

Transformer Feed Type: Loop Feed

Phase: Single Phase

Capacity: 25 KVA

Vector Group: II6

Primary Voltage: 12470V

Primary Voltage Class: 15 kV Class

Primary Phasor: Delta

Primary BIL: 95 KV

Secondary Voltage: 120/240V (L-N-L)

Secondary Phasor: Dual Winding Single Phase

Secondary BIL: 30 KV

Frequency: 60 Hz

Temperature Rise: 65°C

Cooling Class: KNAN; Self-Cooled

Forced Air (Fans): None

Tap Changer: 5-position Tap Changer

Ratings

Meets/Exceeds DOE 2016 Efficiency Ratings

Complies with ANSI / IEEE #C57.12.00

Complies with ANSI / IEEE #C57.12.25

Complies with ANSI / IEEE C57 12.28

Complies with ANSI / IEEE C57 12.38

Complies with ANSI / IEEE C57.12.70

Complies with ASTM D3487

Penta-head Entry Assembly

High-Fire Point Natural Ester Insulating Fluid

Non-PCB Insulating Fluid

Tamper Proof Housing

Lift Up Padlockable Lid

Efficiency: 98.70%

Based on transformer operating at 50% of nameplate base kVA.

Load Losses Based on 85°C Reference Temp.

No Load Loss (in watts)*: +/- 104W

Tap Qty: (2) FCAN Taps Above, (2) FCBN Taps Below

Tap %: 2.5%

Tap Changer Switch Location: Front Compartment

Impedance: 1.0-4.5% Typical, 3.0% Target

Primary Connection Type: Dead Front

Primary Termination: Standoff Well Bushings w/ Removable Studs, 200A Load Break
Elbows w/ Inserts

Primary Connection Qty: (4) Primary Connections for use w/ Elbow Connectors

Primary Bushing Rating: 15 KV, 95 KV, 200 A cont. Rating, 10 KA Short Time Sym. rating
For 0.17 Sec.

Primary Parking Stand Qty: (4) Welded Bracket for Installing Accessory Parking Stand
Bushings

Primary Surge Arrestors: (1) High Voltage Elbow Surge Arrestors

Primary Surge Arrestor Voltage Rating: 15 kV Class

Primary Surge Arrestor MCOV Rating: 12.7 kVrms

Primary Overcurrent Protection (OCP): Bayonet Expulsion Fuses, In Series with Partial
Range Current Limiting Fuses

Primary Overcurrent Protection Method: Fused

Primary Overcurrent Protection Holder: Bayonet Fuse Holder w/ Drip Shield

Primary Neutral Connection: N/A

Primary Grounding Provisions: (1) Grounding lug, accepts #2 Aluminum

Secondary Connection Type: Live Font

Secondary Connections: NEMA Spade Terminals

Secondary Connection Qty: (3)

Secondary Overcurrent Protection (OCP): N/A

Secondary Grounding Provisions: (1) Grounding lug, accepts #2 Aluminum

Metering Current Transformer (CT): N/A

Metering Panel: N/A

Auxiliary Control Panel: N/A

Load Break Switch: 4-Position Load Break Switch

Load Break Switch Qty: (1)

Load Break Switch Location: High Voltage (HV) Front Compartment

Efficiency Standard(s): Meets DOE 2016 Standards, Meets ANSI/IEEE Standards

K-Factor Rating (Harmonic Mitigation): K-1 (Standard)

Pulse Drive Rating: N/A

Insulation Fluid: Biodegradable Natural Vegetable Oil Ester Insulating Fluid, Non-PCB Fluid

Fluid Capacity*: 40.33 Gallons

Liquid Level Indicator: Analog Dial Gauge

Temperature Indicator: Analog Gauge

Pressure/Vacuum Indicator: Analog Gauge

Pressure Relief Device: Included, Automatic Action

Fill Valve: Removable Bolt

Fill Valve Location: Front Compartment

Drain Valve: Included, w/ Sampler

Drain Valve Location: Front Compartment

Winding Material: Copper

Ambient Temperature Rating: 40°C

Sound Level: 48 dBA

Elevation (Altitude): 3300ft (1000 meters) Above Sea Level or Lower

Core Material: Steel

Tank Material: 304 Stainless Steel

Cabinet Material: 304 Stainless Steel

Base Platform Material: 304 Stainless Steel

Housing Type: Tamper Resistant w/ Pad-lockable Lift-up Lid

Paint Type: Weatherproof and UV Resistant Epoxy Coating and Undercoating

Finish Color: Munsell™ 7.0 GY 3.29/1.5 Bell Green

Mounting: Pad Mount

Conduit Opening: Bottom Feed Underground Entry/Exit

Dimensions*: 33.86"-W x 37.4"-D x 25.2"-H

Load Loss (in watts)*: +/- 377W

Total Load Loss (in watts)*: +/- 481W

Note: Losses offered are typical only, not guaranteed

Special Orders - Special Requirements

Contact us for special requirements

Toll Free: 1-800-369-6671

Intl: 1-903-270-1187

Fax: 1-903-765-7664

Weight*: 1049.38 lbs

E-mail: sales@larsonelectronics.com

*Please note that numbers are approximate and subject to change

The MT-PML-R7-1P-DMR-25KVA-SLZ-LT-DF-A6-BB-CS-2C4-M1 Industrial Pad Mount Transformer from Larson Electronics offers powerful, reliable and efficient power distribution in indoor, outdoor and public locations. The low operating costs, low heat emissions and low cost of ownership make this transformer ideal for a wide range of applications and businesses. An enclosed design caters to installations on concrete pads without protective fencing.

****PLEASE NOTE: ANY FREE SHIPPING OFFERS DO NOT APPLY TO POWER DISTRIBUTION PANELS, TRANSFORMERS, OR SUBSTATIONS****

Transformer Features: With a transformer rating of 25 kVA, the industrial transformer features a primary voltage of single-phase 12470V Delta and a secondary voltage of single-phase 120/240V (L-N-L). The unit has a primary loop feed and dead-front primary connections. We also offer systems with radial feed and dead front primary/live front secondary connections. This transformer features a 5-position tap changer with (2) +2.5% taps above and (2) -2.5% taps below to allow small changes in voltage. This pad mount transformer features primary well bushings and standard spade connectors on the secondary side. Equipped with copper windings, this transformer consists of one coil and two core loops.

The MT-PML-R7-1P-DMR-25KVA-SLZ-LT-DF-A6-BB-CS-2C4-M1 is air cooled and does not have fans or mounting provisions for fans. This unit features a 65°C temperature rise for reduced heat waste, increased reliability and longer life. The transformer meets DOE 2016 efficiency standards. The combination of low temperature rise and high efficiency makes this unit suitable for use in electrical rooms, air conditioned spaces in buildings, underground vaults and similar locations, in addition to outdoor areas.

Insulation Fluid: The MT-PML-R7-1P-DMR-25KVA-SLZ-LT-DF-A6-BB-CS-2C4-M1 features biodegradable cooling fluid (KNAN) that is comparable to FR3 fluid. We offer transformers with mineral oil fluid, if needed.

Biodegradable Fluid: Biodegradable cooling fluid (vegetable oil) has a higher heat capacity compared to mineral oil, making the liquid safer to use and more reliable during operations. Vegetable oil has a higher flash point and fire point than mineral oil, hydrocarbon oil, silicone oil and synthetic ester. This cooling fluid is also non-toxic and can tolerate higher breakdown voltages than mineral oil. When operating at high temperatures, biodegradable cooling liquid sustains up to 120% load conditions, which helps preserve the transformer's lifespan and performance.

Gauges: The following gauges are included with the system: liquid level, temperature and pressure/vacuum gauges. Standard liquid level, temperature and pressure/vacuum gauges are analog, manual reading types. These gauges do not have auxiliary contacts.

Fault Pressure Devices: This transformer features an automatic action fault pressure device. Fault pressure devices are used to detect high rates of pressure rise within the tank.

Rapid Rise Relay: There are no rapid rise relays on the unit. This safety component is designed for protection when a rapid increase in tank pressure occurs. The relay is suitable for detecting sudden pressure fluctuations above predetermined safe limits.

Surge arresters: This system comes with high elbow surge arresters on the primary side. Designed for over-voltage and transient voltage protection, the components prevent damage caused by lightning, internal switching or voltage surges. We can offer models without high elbow surge arresters that have mounting provisions for customer-provided surge arresters.

Load Breaker Switch: The MT-PML-R7-1P-DMR-25KVA-SLZ-LT-DF-A6-BB-CS-2C4-M1 is equipped with a load break switch. This switch has four positions: A side on + transformer on, B side on + transformer on, A and B sides + transformer on, and A and B sides + transformer off.

Valves: The MT-PML-R7-1P-DMR-25KVA-SLZ-LT-DF-A6-BB-CS-2C4-M1 is equipped with a fill valve and drain valve with a sampler port.

Protection Fuses: This transformer contains bayonet protection fuses on the primary side. For units without protection fuses, upstream protection is provided. We recommend provisions for protection fuses when possible, as blown fuses may require more frequent oil changes.

Mount: The heavy-duty enclosure makes the unit suitable for both indoor and outdoor applications. This power distribution system can be pad mounted on concrete pads.

Benefits: The MT-PML-R7-1P-DMR-25KVA-SLZ-LT-DF-A6-BB-CS-2C4-M1 pad mount transformer offers many benefits to consumers. This transformer provides owners with significant energy savings, as well as offering environmental benefits. Higher efficiency not only extends the life of the transformer, but also turns into cost savings for owners in the form of lower energy bills and decreased cost of ownership.

Applications: General purposes, industrial sites, electrical rooms, underground vaults, manufacturing facilities, steel plants, offshore, commercial, military, processing plants, electric power distribution, utilities, public locations and more.

Larson Electronics is a manufacturer and as such can build stationary and portable transformer systems to your specifications. Although we carry several models of power distribution transformer systems, we can deliver custom ordered units almost as quickly as our prebuilt units. If this model does not meet your needs, please contact us at 1-800-369-6671 or sales@larsonelectronics.com to discuss your specific requirements.



Frequently Asked Questions (FAQ)

There are no Fags



Image: MT-PML-R7-1P-DMR-25KVA-SLZ-LT-DF-A6-BB-CS-2C4-M1

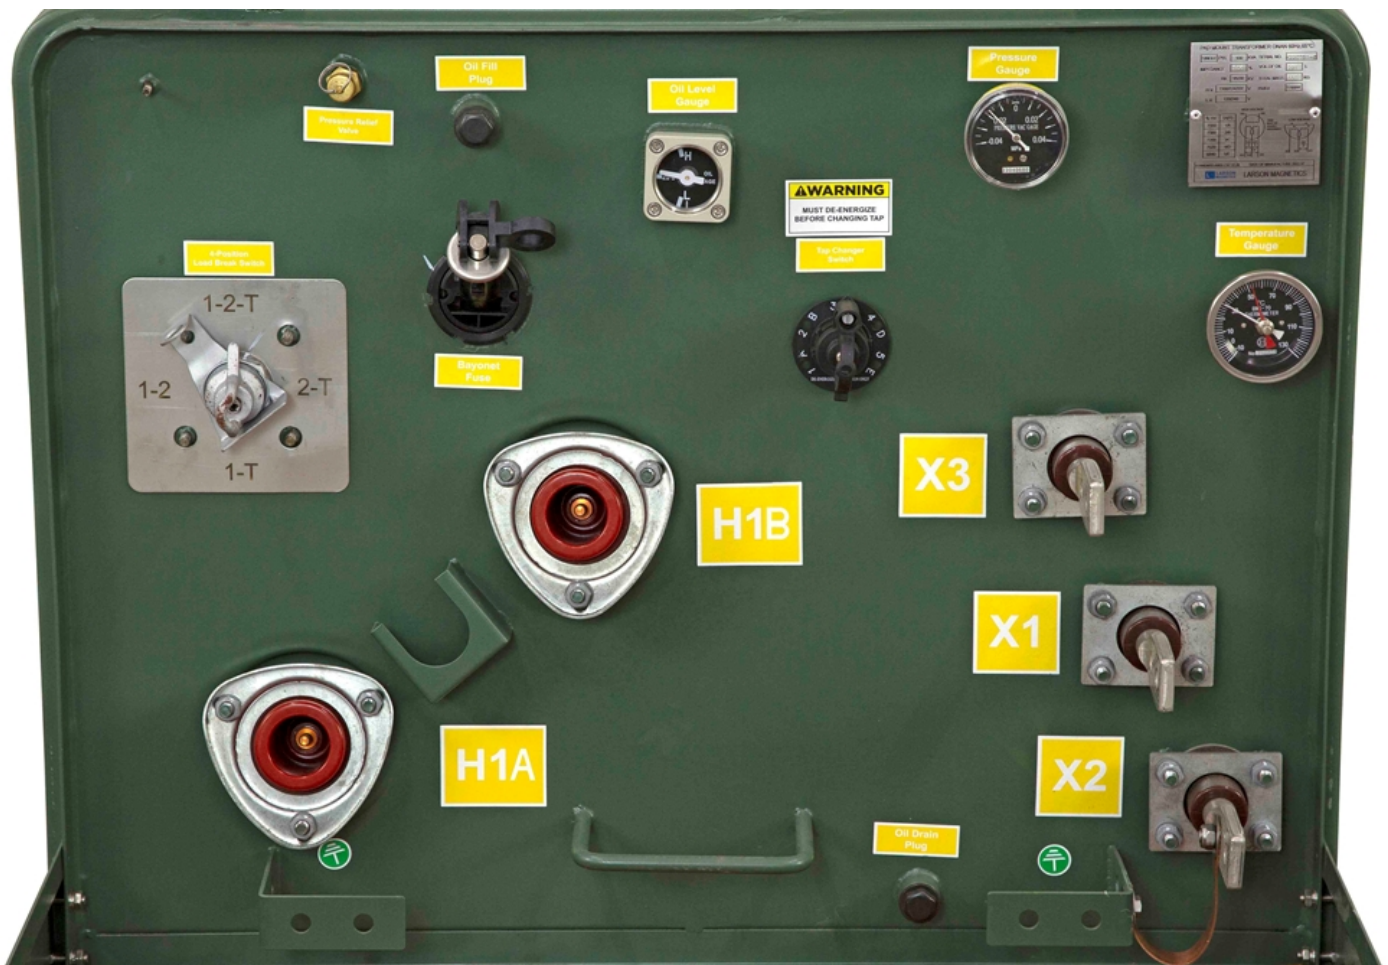


Image: MT-PML-R7-1P-DMR-25KVA-SLZ-LT-DF-A6-BB-CS-2C4-M1



Image: MT-PML-R7-1P-DMR-25KVA-SLZ-LT-DF-A6-BB-CS-2C4-M1



Image: MT-PML-R7-1P-DMR-25KVA-SLZ-LT-DF-A6-BB-CS-2C4-M1



Export Control Classification Number (ECCN): EAR99



Links (Click on the below items to view):

- **HigResPic1**(<https://www.larsonelectronics.com/images/product/HigResPic1/338207.JPG>)
- **HigResPic2**(<https://www.larsonelectronics.com/images/product/HigResPic2/338207.JPG>)
- **HigResPic3**(<https://www.larsonelectronics.com/images/product/HigResPic3/338207.JPG>)
- **HigResPic4**(<https://www.larsonelectronics.com/images/product/HigResPic4/338207.JPG>)
- **HigResPic5**(<https://www.larsonelectronics.com/images/product/HigResPic5/338207.JPG>)
- **Video1**(<https://www.youtube.com/watch?v=SnwK9tzrjUM>)
- **Video2**(<https://www.youtube.com/watch?v=mpt7J5hdJp8>)
- **Video3**(<https://www.youtube.com/watch?v=KlZsyVtvSWM>)
- **Video4**(<https://www.youtube.com/watch?v=mN2qPmdLwW4>)
- **ISO 9001 Certification**(<http://larsonelectronics.com/images/pdfdocs/ISO9001.PDF>)
- **Business Certificate**(<https://www.larsonelectronics.com/images/pdfdocs/w9.PDF>)
- **Shipping Time Map**(<https://www.larsonelectronics.com/images/product/ShippingTimeMap/ShippingTimeMap.pdf>)