

MT-DOE16-FP-3P-480D-3KVA-400Y.231-N1-CU

3 kVA Isolation Transformer - 480V Delta Primary - 400Y/231 Wye-N Secondary - NEMA 1 - Fully Potted - Copper

Product ID: 338724

Please see last page for supporting documentation for this product (certificates, CAD files & drawings, IES files, wiring diagrams, etc).



Image: MT-DOE16-FP-3P-480D-3KVA-400Y.231-N1-CU

Larson Electronics LLC manufactures a wide variety of products, including custom built to spec designs. The pictures displayed for this unit are a general representation of form factor for the product line and may not accurately represent this exact configuration in every detail due to custom builds and changes between similar products in our standard catalog. The specifics for this configuration are listed in the specification table and supporting documentation (CAD files, Dimensional Drawing, Name Plate Diagram, Wiring Diagram, etc.). This means that specific details (receptacles, plugs, wires, connections, mounting brackets, external finishes, etc.) may not be accurately represented in images vs specifications. Please review specifications and do not order based solely on images.

MT-DOE16-FP-3P-480D-3KVA-400Y.231-N1-CU Fully Potted Isolation Transformer

Phase: Three Phase

Frequency: 60 Hz

Capacity: 3 kVA

Primary Voltage: 480 V

Primary Connection: Delta

Secondary Voltage: 400Y/231 V

Secondary Connection: Wye-N

Taps: TBD

Impedance: 6.5%

Efficiency @ 35% Load: 98.6%

Winding Material: Copper

Primary Termination (Std): Wire Leads

Secondary Termination (Std): Wire Leads

Mounting: Floor or Wall

Cooling: ANN

Insulation: 220°C

Temperature Rise: 150°C

Harmonic Mitigation (K-Factor): K-1

Sound Level: Meets NEMA ST-20 Standards

Enclosure Material: NEMA Type 1 Heavy Duty - Steel

Finish: ANSI 61 Grey, UL50 Finish

Approvals/Ratings

Listing: UL Listed

CSA Certified

Isolation Transformer

Fully Potted

NEMA 1, Indoor

5-Years Warranty

Special Orders - Special Requirements

Contact us for special requirements

Toll Free: 1-800-369-6671

Dimensions: 14.00"H x 15.50"L x 11.00"D
Weight: - Lbs

Intl: 1-903-270-1187
E-mail: sales@larsonelectronics.com

The MT-DOE16-FP-3P-480D-3KVA-400Y.231-N1-CU 3 kVA 3 Phase Energy Efficient Fully Potted Isolation Transformer from Larson Electronics is powerful, reliable and designed with the environment in mind. Suitable for indoor applications, the MT-DOE16-FP-3P-480D-3KVA-400Y.231-N1-CU provides increased reliability and protection against critical equipment failures. The lower operating costs, lower heat emissions and lower cost of ownership make this transformer ideal for a wide range of applications and businesses.

PLEASE NOTE: ANY FREE SHIPPING OFFERS DO NOT APPLY TO POWER DISTRIBUTION PANELS, TRANSFORMERS, OR SUBSTATIONS

Transformer Features: With a transformer rating of 3 kVA, the MT-DOE16-FP-3P-480D-3KVA-400Y.231-N1-CU transformer is a fully potted three phase unit with a primary voltage of 480 V Delta. It also provides a secondary voltage of 400Y/231 V Wye-N. Featuring robust construction, this unit's cores are manufactured with non-aging, cold-rolled silicon steel laminations using state of the art technology.

This fully potted unit boasts a low cost of ownership and is highly energy efficient. Lower heat emissions mean less cooling is needed as well. The standard type 3R enclosure makes the unit suitable for both indoor and outdoor applications and it can be wall mounted. The unit also features 220°C insulation with a 150°C temperature rise.

Benefits: The MT-DOE16-FP-3P-480D-3KVA-400Y.231-N1-CU fully potted general purpose transformer offers many benefits to the consumer. Precision cut copper transformer winding material helps to improve performance. The close tolerances used during manufacturing also eliminate burrs, which hinder performance. Each core is specially coated to prevent the ingress of moisture and is electrically balanced to minimize axial forces during short circuit situations.

This fully potted transformer provides owners with significant energy savings as well as offering environmental benefits. Higher efficiency not only extends the life of the transformer, but also turns into cost savings for owners in the form of lower energy bills and decreased cost of ownership. Integrated wall mounting brackets make installation fast and easy.

Safety: The MT-DOE16-FP-3P-480D-3KVA-400Y.231-N1-CU is an isolation transformer which means that it provides operators with an increased level of protection against electric shock. An isolation transformer can also suppress electrical noise in sensitive devices and transfer power between two circuits which must not be connected. The MT-DOE16-FP-3P-480D-3KVA-400Y.231-N1-CU achieves these safety features by separating or "isolating" the powered device from the power source and insulation between the primary and secondary power sources.

Applications: General purposes.

Larson Electronics is a manufacturer and as such can build stationary and portable transformer systems to your specifications. Although we carry several models of power distribution transformer systems, we can deliver custom ordered units almost as quickly as our prebuilt units. If this model does not meet your needs, please contact us at 1-800-369-6671 or

Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671



www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.765.7664

sales@larsonelectronics.com to discuss your specific requirements.



Frequently Asked Questions (FAQ)

There are no Faqs



Image: MT-DOE16-FP-3P-480D-3KVA-400Y.231-N1-CU



Image: MT-DOE16-FP-3P-480D-3KVA-400Y.231-N1-CU



Image: MT-DOE16-FP-3P-480D-3KVA-400Y.231-N1-CU

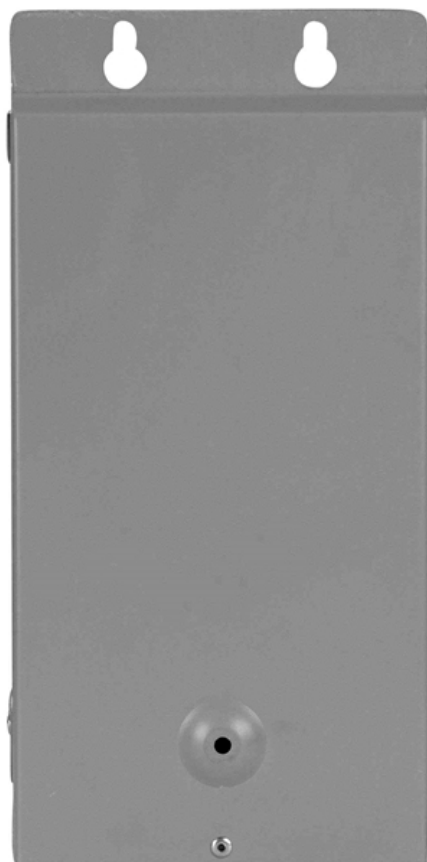


Image: MT-DOE16-FP-3P-480D-3KVA-400Y.231-N1-CU



Export Control Classification Number (ECCN): EAR99



Links (Click on the below items to view):

- **HigResPic1**(<https://www.larsonelectronics.com/images/product/HigResPic1/338724.JPG>)
- **HigResPic2**(<https://www.larsonelectronics.com/images/product/HigResPic2/338724.JPG>)
- **HigResPic3**(<https://www.larsonelectronics.com/images/product/HigResPic3/338724.JPG>)
- **HigResPic4**(<https://www.larsonelectronics.com/images/product/HigResPic4/338724.JPG>)
- **HigResPic5**(<https://www.larsonelectronics.com/images/product/HigResPic5/338724.JPG>)
- **HigResPic6**(<https://www.larsonelectronics.com/images/product/HigResPic6/338724.JPG>)
- **HigResPic7**(<https://www.larsonelectronics.com/images/product/HigResPic7/338724.JPG>)
- **ISO 9001 Certification**(<http://larsonelectronics.com/images/pdfdocs/ISO9001.PDF>)
- **Business Certificate**(<https://www.larsonelectronics.com/images/pdfdocs/w9.PDF>)
- **Shipping Time Map**(<https://www.larsonelectronics.com/images/product/ShippingTimeMap/ShippingTimeMap.pdf>)