Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.765.7664

MT-PDT-VPM-FPE-R7-3P-DNC-15KVA-DW-A6-DZ-CS-1Z-ZZ-Z-N4X-M1

15 KVA Vacuum Pressure Impregnated Transformer, 7200V Delta Primary, 120V Delta Secondary, ANN, Class R, VPI, Fully Potted/Marine Rated

Product ID: 339962

Please see last page for supporting documentation for this product (certificates, CAD files & drawings, IES files, wiring diagrams, etc).

Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671



www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.765.7664

Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.765.7664

Image: MT-PDT-VPM-FPE-R7-3P-DNC-15KVA-DW-A6-DZ-CS-1Z-ZZ-Z-N4X-M1

Larson Electronics LLC manufactures a wide variety of products, including custom built to spec designs. The pictures displayed for this unit are a general representation of form factor for the product line and may not accurately represent this exact configuration in every detail due to custom builds and changes between similar products in our standard catalog. The specifics for this configuration are listed in the specification table and supporting documentation (CAD files, Dimensional Drawing, Name Plate Diagram, Wiring Diagram, etc.). This means that specific details (receptacles, plugs, wires, connections, mounting brackets, external finishes, etc.) may not be accurately represented in images vs specifications. Please review specifications and do not order based solely on images.

MT-PDT-VPM-FPE-R7-3P-DNC-15KVA-DW-A6-DZ-CS-1Z-ZZ-Z-N4X-M1 Vacuum Pressure Impregnated Transformer

Transformer Type: Vacuum Pressure Impregnated (VPI) Transformer, Marine Duty Rated
Transformer Configuration: Dry Type, Ventilated, Fully Potted
Phase: Three Phase
Capacity: 15 KVA
Vector Group: Dd0
Primary Voltage: 7200V AC
Primary Voltage Class: 8.7 kV Class
Primary Phasor: Delta
Primary BIL: 75 KV
Secondary Voltage: 120V AC
Secondary Voltage Class: 1.2 kV Class
Secondary Phasor: Delta
Secondary BIL: 30 KV
Frequency: 60 Hz
Temperature Rise: 80°C
Cooling: ANN

Forced Air (Fans): None

Insulation Class: Class R
Tap Changer: 5-Position Tap Changer
Tap Qty: (2) FCAN Above, (2) FCBN Below
Tap %: 2.5%
Tap Changer Switch Location: HV Compartment
Impedance (at 120°C): 1.0-4.5% Typical
Primary Connection Type: Terminal Lugs, Accommodate with 3#2/0+1#6G - 1 1/2"C
Primary Surge Arrestors: N/A
Primary Surge Arrestor Voltage Rating: N/A
Primary Surge Arrestor MCOV Rating: N/A
Primary Overcurrent Protection (OCP): N/A
Primary Overcurrent Protection Method: N/A
Primary Grounding Provisions: N/A
Secondary Connection Type: Terminal Lugs, Accommodate with (4) 600MCM+1#1/0G - 3 1/2"C

Secondary Overcurrent Protection (OCP): N/A

Secondary Grounding Provisions: Lugs
Metering Current Transformer (CT): N/A
Metering Panel: N/A
Auxiliary Control Panel: N/A
Load Break Switch: N/A
Load Break Switch Qty: N/A
Load Break Switch Location: N/A
Efficiency Standard(s): DOE 2016, IEEE, ANSI

Ratings

NRTL Listed for United States and Canada
Complies with ANSI / IEEE C57.12.00
Complies with ANSI / IEEE C57.12.01
Complies with ANSI / IEEE C57 12.35
Complies with ANSI / IEEE C57.12.59
Complies with ANSI / IEEE C57.12.70
Meets/Exceeds DOE 2016 Efficiency Ratings
Meets/Exceeds CSA Efficiency Ratings
Meets or Exceeds NEMA ST-20 Standards
NEMA 4X Indoor/Outdoor Enclosure
Seismic Qualified for Earthquake Loads
RoHS Certified
Marine Duty Rated
CE Certified

Efficiency %: 99.00%
Based on transformer operating at 50% of nameplate base kVA.

Load Losses at 145°C Reference Temp.
No Load Loss (in watts): -
Full Load Loss (in watts): -
Total Load Loss (in watts): -
Note: *Losses offered are typical only, not guaranteed*

Factory Tests

Efficiency at 25, 50, 75 and 100 percent load
Percent regulation at 80 and 100 percent power factor
No load and full loss in watts
Impedance based on reference temperature

Sound level in db of transformer in enclosure

Average temperature rise based on 40 degrees C ambient temperature.

K-Factor Rating (Harmonic Mitigation): K-1 (Standard)
Temperature Sensors in Coil: Included
Temperature Gauge: Included
Seismic Bracing: Included
Weather Shield: N/A
Space Heaters: N/A
Winding Material: Copper
Ambient Temperature Rating: 40°C
Sound Level: 50 dBA
Elevation (Altitude) Rating: 3300ft (1000 meters) Above Sea Level
Core Material: Non-aging Silicon Steel
Enclosure Material: Stainless Steel
Enclosure Rating: NEMA 4X
System Form Factor: N/A
Paint Type: Epoxy Paint
Finish: ANSI 61 Light Grey
Mount: Pad Mount / Floor Mount
Dimensions: 68"-W x 39"-D x 50"-H
Weight: 663 lbs
*Please note that numbers are approximate and subject to change

Special Orders - Special Requirements
Contact us for special requirements
Toll Free: 1-800-369-6671
Intl: 1-903-270-1187
Fax: 1-903-765-7664
E-mail: sales@larsonelectronics.com

The MT-PDT-VPM-FPE-R7-3P-DNC-15KVA-DW-A6-DZ-CS-1Z-ZZ-Z-N4X-M1 Vacuum Pressure Impregnated Transformer from Larson Electronics converts three-phase 7200V Delta to three-phase 120V Delta. This power distribution unit provides operators the ability to safely tap into and distribute 15 KVA AC power from a variety of sources, such as direct grid power. The entire system is secured to a skid mount platform.

PLEASE NOTE: ANY FREE SHIPPING OFFERS DO NOT APPLY TO POWER DISTRIBUTION PANELS, TRANSFORMERS, OR SUBSTATIONS*

Transformer Features: With a transformer rating of 15 KVA, the industrial dry type transformer features a primary voltage of three-phase 7200V AC Delta and a secondary voltage of three-phase 120V AC Delta. This transformer is equipped with a 5-position tap changer with five +/-2.5% taps (two FCAN above and two FCBN below) to allow small changes in voltage. The system has copper windings for high strength and electrical conductivity. This VPI transformer features minimized air gaps and voids in the insulation, leading to increased durability and thermal stability.

The MT-PDT-VPM-FPE-R7-3P-DNC-15KVA-DW-A6-DZ-CS-1Z-ZZ-Z-N4X-M1 does not include fans or mounting provisions for fans.

Transformer Efficiency: The Class R transformer meets standard efficiency requirements. High efficiency makes this unit suitable for use in electrical rooms, air conditioned spaces in buildings, underground vaults and similar locations, in addition to outdoor areas.

Temperature Sensor: The MT-PDT-VPM-FPE-R7-3P-DNC-15KVA-DW-A6-DZ-CS-1Z-ZZ-Z-N4X-M1 is equipped with temperature sensors inside the system for controls and monitoring. A monitoring service is not included with the transformer.

Temperature Gauge: This transformer comes with a temperature gauge.

Load Break Switch: This VPI transformer does not include a load break switch. We can add a load break switch at an additional cost.

Surge Arresters: This transformer does not include surge arresters. Designed for over-voltage and transient voltage protection, the components prevent damage caused by lightning, internal switching or voltage surges. We can offer models without surge arresters that have mounting provisions for customer-provided surge arresters.

Control Transformer: This VPI transformer does not include a control transformer. We can add a control transformer for operating equipment at an additional cost.

Seismic Bracing: This system does not include seismic bracing. We can add seismic bracing for added protection in areas prone to earthquakes at an additional cost.

Weather Shield: This transformer does not include a weather shield. We can add a weather shield for protection in outdoor areas, humid environments and rodents at an additional cost.

Space Heaters: This system does not include a space heater. We can add a space heater for preventing condensation during extended shutdown at an additional cost.

Enclosure Design: This VPI transformer is protected by a stainless steel housing. The enclosure carries a NEMA 4X rating for protection from exposure to moisture, rain, dust and debris.

Mount: The power distribution unit is mounted on a skid plate base that allows this transformer to easily be moved from one location to another using a forklift. The skid platform is designed for serious use and is ruggedly constructed to withstand demanding conditions and heavy duty industrial applications. The industrial grade skid platform can be modified to meet the needs of job-site requirements.

Benefits: The MT-PDT-VPM-FPE-R7-3P-DNC-15KVA-DW-A6-DZ-CS-1Z-ZZ-Z-N4X-M1 transformer offers many benefits to consumers. This transformer provides owners with significant energy savings, as well as offering environmental benefits. Higher efficiency not only extends the life of the transformer, but also turns into cost savings for owners in the form of lower energy bills and decreased cost of ownership.

Applications: General purposes, industrial sites, electrical rooms, underground vaults, manufacturing facilities, steel plants, offshore, commercial, military, processing plants, electric power distribution, utilities, public locations and more.

Larson Electronics is a manufacturer and as such can build stationary and portable transformer systems to your specifications. Although we carry several models of power distribution transformer systems, we can deliver custom ordered units almost as quickly as our prebuilt units. If this model does not meet your needs, please contact us at 1-800-369-6671 or sales@larsonelectronics.com to discuss your specific requirements.

Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.765.7664

Frequently Asked Questions (FAQ)

There are no Faqs

Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.765.7664



Image: MT-PDT-VPM-FPE-R7-3P-DNC-15KVA-DW-A6-DZ-CS-1Z-ZZ-Z-N4X-M1

Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.765.7664



Image: MT-PDT-VPM-FPE-R7-3P-DNC-15KVA-DW-A6-DZ-CS-1Z-ZZ-Z-N4X-M1

Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.765.7664

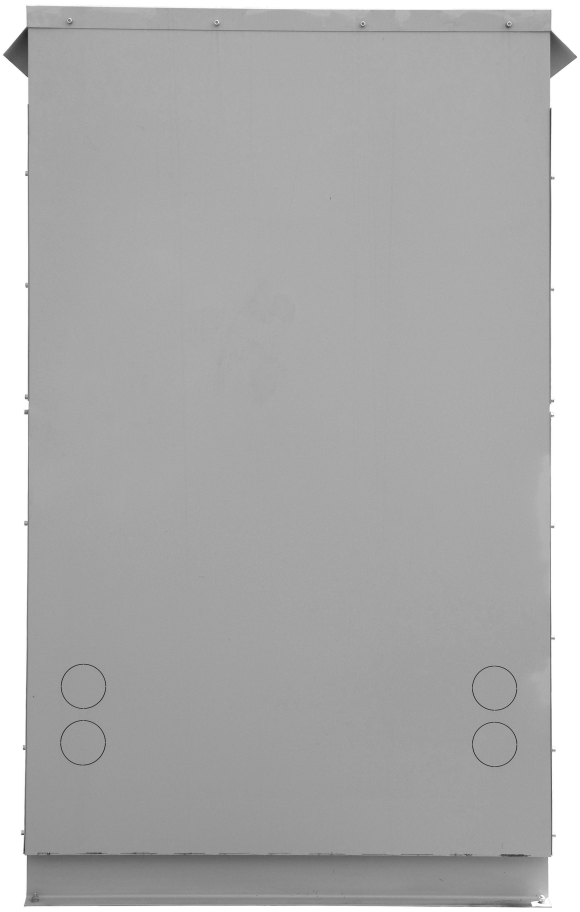


Image: MT-PDT-VPM-FPE-R7-3P-DNC-15KVA-DW-A6-DZ-CS-1Z-ZZ-Z-N4X-M1

Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.765.7664



Image: MT-PDT-VPM-FPE-R7-3P-DNC-15KVA-DW-A6-DZ-CS-1Z-ZZ-Z-N4X-M1

Export Control Classification Number (ECCN): EAR99

Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.765.7664

Links (Click on the below items to view):

- **HigResPic1** (https://www.larsonelectronics.com/images/product/HigResPic1/339962.JPG)
- **HigResPic2** (https://www.larsonelectronics.com/images/product/HigResPic2/339962.JPG)
- **HigResPic3** (https://www.larsonelectronics.com/images/product/HigResPic3/339962.JPG)
- **HigResPic4** (https://www.larsonelectronics.com/images/product/HigResPic4/339962.JPG)
- **HigResPic5** (https://www.larsonelectronics.com/images/product/HigResPic5/339962.JPG)
- **HigResPic6** (https://www.larsonelectronics.com/images/product/HigResPic6/339962.JPG)
- **HigResPic7** (https://www.larsonelectronics.com/images/product/HigResPic7/339962.JPG)
- **HigResPic8** (https://www.larsonelectronics.com/images/product/HigResPic8/339962.JPG)
- **HigResPic9** (https://www.larsonelectronics.com/images/product/HigResPic9/339962.JPG)
- **HigResPic10** (https://www.larsonelectronics.com/images/product/HigResPic10/339962.JPG)
- **ISO 9001 Certification** (http://larsonelectronics.com/images/pdfdocs/ISO9001.PDF)
- **Business Certificate** (https://www.larsonelectronics.com/images/pdfdocs/w9.PDF)
- **Shipping Time Map** (https://www.larsonelectronics.com/images/product/ShippingTimeMap/ShippingTimeMap.pdf)