

XLE-PDU-CT-3P-30A-600V-120VC-1XNC-N1

Definite Purpose Contactor – 600V Max. Voltage - 120V AC Coil Voltage – 30 Amps - (1) NC Contact - NEMA 1

Product ID: 342125

Please see last page for supporting documentation for this product (certificates, CAD files & drawings, IES files, wiring diagrams, etc).



Image: XLE-PDU-CT-3P-30A-600V-120VC-1XNC-N1

Larson Electronics LLC manufactures a wide variety of products, including custom built to spec designs. The pictures displayed for this unit are a general representation of form factor for the product line and may not accurately represent this exact configuration in every detail due to custom builds and changes between similar products in our standard catalog. The specifics for this configuration are listed in the specification table and supporting documentation (CAD files, Dimensional Drawing, Name Plate Diagram, Wiring Diagram, etc.). This means that specific details (receptacles, plugs, wires, connections, mounting brackets, external finishes, etc.) may not be accurately represented in images vs specifications. Please review specifications and do not order based solely on images.

XLE-PDU-CT-3P-30A-600V-120VC-1XNC-N1 Industrial Contactor

Device Type: Definite Purpose Contactor
Operation: Non-reversing
Dimensions: 4"-W x 3.5"-D x 2"-H
Weight: 1 lb
Max. Voltage: 600V AC, 60 Hz
Coil Voltage: 120V AC, 60 Hz
Current Rating: 30A
Power Consumption: 11 kW
Max. HP Rating: 2, 5/7.5, 10, 15, 20 (1/3PH @120, 240/208, 240,480, 600 V)
Poles: 3
Auxiliary Contacts: (1) NC 1P
Total Contacts: (4) Normally Open (3 Power + 1 Auxiliary)
Frame Size: 1.772 inch
Cycles: 200,000
Enclosure: Housed in a NEMA 1 Enclosure
Configuration: L1/T1, L2/T2, L3/T3
Mount: Screw Mount (Panel Mount)
Terminals: Screw Terminals

Larson Electronics manufacture a wide variety of custom power distribution systems.

Ratings/Approvals

Class B Contactor Coil Insulation
CE Marked
RoHS Compliant
UL Listed
CSA Certified
IEC 60947
EN 60947
1-Year Warranty

Special Orders - Special Requirements

Contact us for special requirements
Intl: 1-903-270-1187
Toll Free: 1-800-369-6671
Fax: 1-903-765-7664
E-mail: sales@larsonelectronics.com

The pictures displayed for this unit are a general representation of form factor and may not accurately represent this exact configuration in every detail due to being custom builds. The specifics for this configuration are listed in the specification table and one-line diagram.

The XLE-PDU-CT-3P-30A-600V-120VC-1XNC-N1 from Larson Electronics is a Definite Purpose Contactor for secure connections to circuits and motors in industrial sites. This 30-amp device is compatible with a 600V AC maximum voltage/120V AC coil voltage and offers up to 200,000 electrical cycles. Operators can mount the unit on flat surfaces, facilitated by screw mounting points on the contactor body.

The XLE-PDU-CT-3P-30A-600V-120VC-1XNC-N1 facilitates electrical connections in industrial facilities. This 30-amp, 3-pole contactor with one normally open auxiliary contact operates on 600V AC/120V AC (maximum/coil voltage). The definite purpose contactor features Class B contactor coil insulation and supports up to 200,000 cycles. Configuration on the unit includes L1/T1, L2/T2, L3/T3 main power terminals with an additional NC auxiliary contact (13–14). Operators can mount the device on flat surfaces via screw mounting provisions.

Applications: HVAC systems, industrial motors, compressors, chemical processing, welding, heating equipment, manufacturing sites and more.

At Larson Electronics, we do more than meet your lighting needs. We also provide replacement, retrofit, and upgrade parts as well as industrial grade power accessories. Our craftsmen can custom build any lighting system and/or accessories to fit the unique demands of your operation. A commitment to honesty, quality, and dependability has made Larson Electronics a leader in the lighting and electronics business since 1973. Contact us today at 800-369-6671 or message sales@larsonelectronics.com for more information about our custom options tailored to meet your specific industry needs.



Frequently Asked Questions (FAQ)

There are no Fags

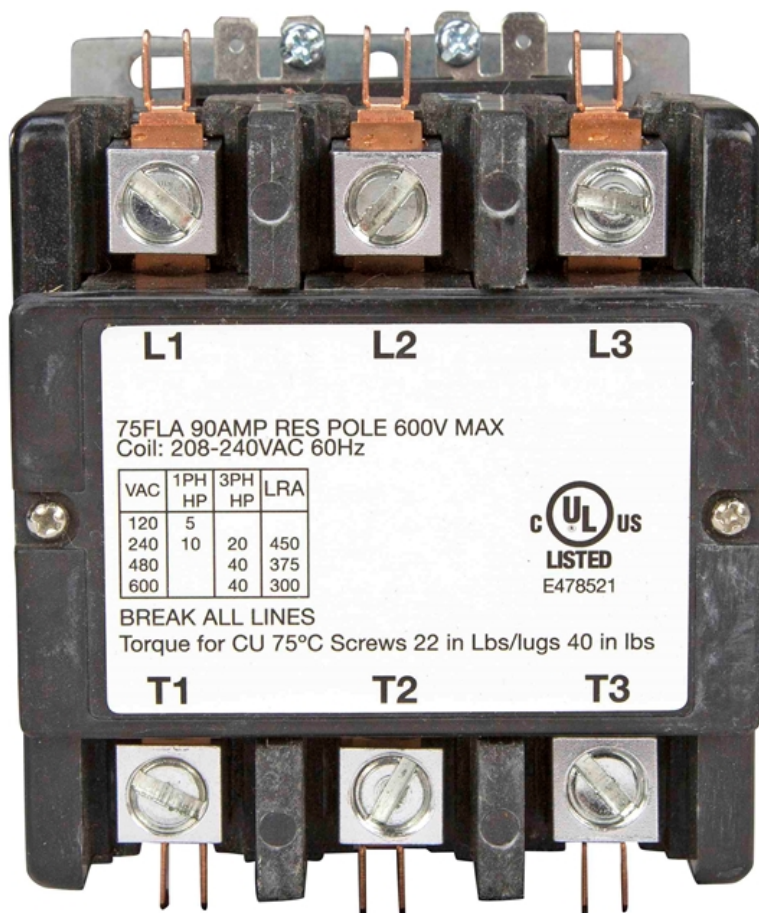


Image: XLE-PDU-CT-3P-30A-600V-120VC-1XNC-N1

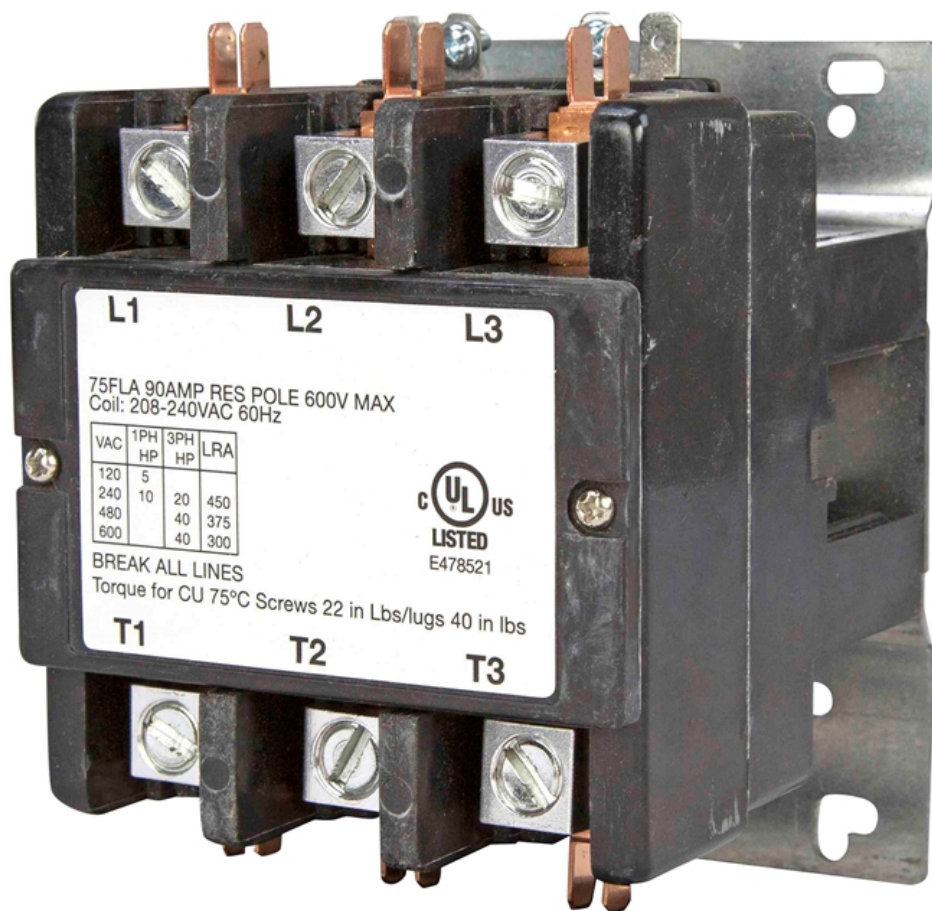


Image: XLE-PDU-CT-3P-30A-600V-120VC-1XNC-N1

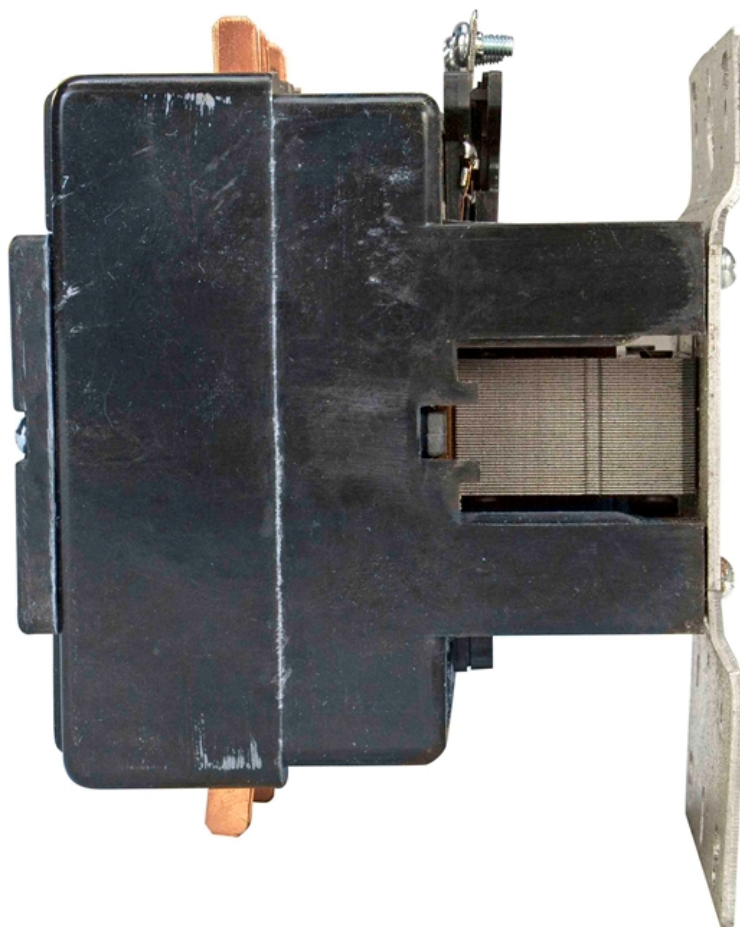


Image: XLE-PDU-CT-3P-30A-600V-120VC-1XNC-N1

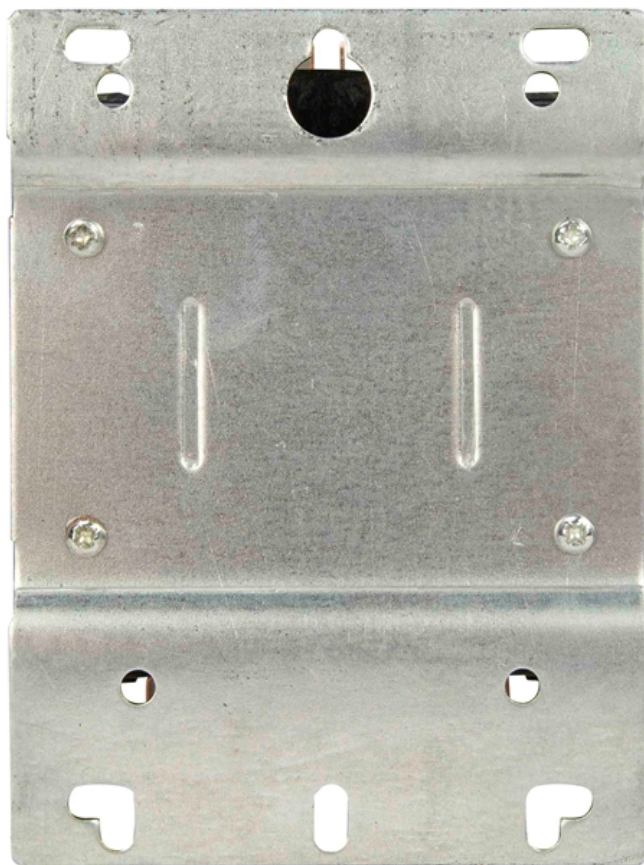


Image: XLE-PDU-CT-3P-30A-600V-120VC-1XNC-N1



Export Control Classification Number (ECCN): EAR99



Links (Click on the below items to view):

- **HigResPic1**(<https://www.larsonelectronics.com/images/product/HigResPic1/342125.JPG>)
- **HigResPic2**(<https://www.larsonelectronics.com/images/product/HigResPic2/342125.JPG>)
- **HigResPic3**(<https://www.larsonelectronics.com/images/product/HigResPic3/342125.JPG>)
- **HigResPic4**(<https://www.larsonelectronics.com/images/product/HigResPic4/342125.JPG>)
- **HigResPic5**(<https://www.larsonelectronics.com/images/product/HigResPic5/342125.JPG>)
- **HigResPic6**(<https://www.larsonelectronics.com/images/product/HigResPic6/342125.JPG>)
- **HigResPic7**(<https://www.larsonelectronics.com/images/product/HigResPic7/342125.JPG>)
- **HigResPic8**(<https://www.larsonelectronics.com/images/product/HigResPic8/342125.JPG>)
- **ISO 9001 Certification**(<http://larsonelectronics.com/images/pdfdocs/ISO9001.PDF>)
- **Business Certificate**(<https://www.larsonelectronics.com/images/pdfdocs/w9.PDF>)
- **Shipping Time Map**(<https://www.larsonelectronics.com/images/product/ShippingTimeMap/ShippingTimeMap.pdf>)