Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.765.7664

EXP-CTR-1P-30A-120V-2X0.75NS

30A Explosion Proof Contactor - Class I, II, III - 120V AC, 1P Contactor - (2) 3/4" NPT Hubs - ATEX/IECEX Rated

Product ID: 344051

Please see last page for supporting documentation for this product (certificates, CAD files & drawings, IES files, wiring diagrams, etc).



Image: EXP-CTR-1P-30A-120V-2X0.75NS

Larson Electronics LLC manufactures a wide variety of products, including custom built to spec designs. The pictures displayed for this unit are a general representation of form factor for the product line and may not accurately represent this exact configuration in every detail due to custom builds and changes between similar products in our standard catalog. The specifics for this configuration are listed in the specification table and supporting documentation (CAD files, Dimensional Drawing, Name Plate Diagram, Wiring Diagram, etc.). This means that specific details (receptacles, plugs, wires, connections, mounting brackets, external finishes, etc.) may not be accurately represented in images vs specifications. Please review specifications and do not order based solely on images.

EXP-CTR-1P-30A-120V-24VC-2X0.75NS Explosion Proof Contactor

Listing: United States, Canada, International
Device Type: Explosion Proof Contactor
External Dimensions: 9.13" x 9.63" x 7.18"
Weight: -
Voltage: 120V AC, 50/60 Hz
Amps: 30A
Poles: 1 Pole
Configuration: NO or NC
Coil Voltage: 120V AC
Material: Copper-free Aluminum
Enclosure Finish: Electrostatically Applied Powder Epoxy/Polyester Finish
Mount: Surface
Wiring: Contactors - Lugs
Hubs: (2) 3/4" NPT Hubs
Hub Location: (1) North, (1) South
Access Hole OD: 5.38"

Ratings/Approvals

Class I, Division 1&2 Groups B,C,D
Class I, Zones 1&2 Groups IIB+H2,IIA
Class II, Division 1&2 Groups E,F,G
Class III
ATEX/IEC Ex
Ex d IIC T6 or T5
Ex tD A21 IP66 T80°C or T90°C IP66
Ta = -20°C to +60°C
NEMA Type 3, 4, 4X, 7 (B,C,D), 9 (E,F,G)

Special Orders - Special Requirements

Contact us for special requirements

Intl: 1-903-270-1187
Toll Free: 1-800-369-6671
Fax: 1-903-765-7664
E-mail: sales@larsonelectronics.com

The EXP-CTR-1P-30A-120V-2X0.75NS from Larson Electronics is an Explosion Proof Contactor for secure connections to circuits and motors in ATEX-rated and combustible sites. This 30-amp device is compatible with 120V AC, 50/60 Hz and features a normally open or normally closed configuration. Operators are provided access to two 3/4" NPT hubs at the north and south sides of the explosion proof unit.

The EXP-CTR-1P-30A-120V-2X0.75NS facilitates electrical connections in flammable environments. This 30-amp, 1-pole unit operates on 120V AC, 50/60 Hz. Offered in a normally open or normally closed configuration, the explosion proof contactor features lugs for secure connections. The coil voltage of the device is 120V AC.

Constructed of copper-free aluminum with an electrostatically applied powder epoxy/polyester finish, this explosion proof contactor is rated NEMA Type 3, 4, 4X, 7 (B,C,D) and 9 (E,F,G) and designed to withstand the rigors of demanding environmental and operating conditions while remaining robust and easy to use.

Hubs: Two, 3/4" NPT hubs are available on the north and south sides (1 per side) of the ATEX rated device. This unit is compatible with surface mount applications.

Applications: Hazardous locations, HVAC systems, industrial motors, compressors, chemical processing, welding, heating equipment, manufacturing sites and more.

At Larson Electronics, we do more than meet your lighting needs. We also provide replacement, retrofit, and upgrade parts as well as industrial grade power accessories. Our craftsmen can custom build any lighting system and/or accessories to fit the unique demands of your operation. A commitment to honesty, quality, and dependability has made Larson Electronics a leader in the lighting and electronics business since 1973. Contact us today at 800-369-6671 or message sales@larsonelectronics.com for more information about our custom options tailored to meet your specific industry needs.

Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.765.7664

Frequently Asked Questions (FAQ)

There are no Faqs

Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.765.7664



Image: EXP-CTR-1P-30A-120V-2X0.75NS

Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.765.7664

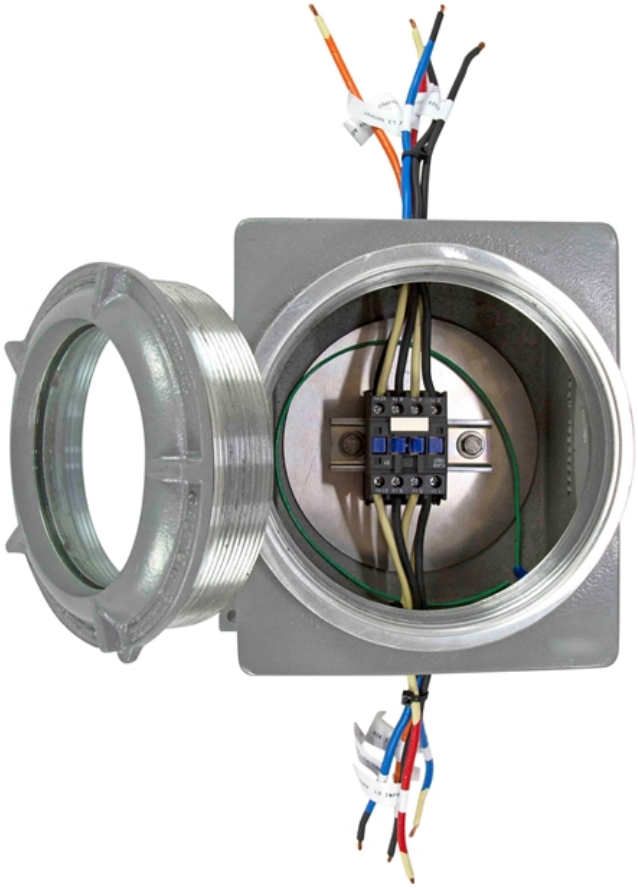


Image: EXP-CTR-1P-30A-120V-2X0.75NS

Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.765.7664



Image: EXP-CTR-1P-30A-120V-2X0.75NS

Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.765.7664



Image: EXP-CTR-1P-30A-120V-2X0.75NS

Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.765.7664

EXP-CTR-1P-30A-120V-2X0.75NS

Product ID: 344051

Export Control Classification Number (ECCN): EAR99

Options:

EXP-CTR-1P-30A-120V-2X0.75NS-Contact Config
Example: EXP-CTR-1P-30A-120V-2X0.75NS-NO

Contact Config	
NORMALLY OPEN	-NO
NORMALLY CLOSED	-NC

Links (Click on the below items to view):

- **HigResPic1**(https://www.larsonelectronics.com/images/product/HigResPic1/344051.JPG)
- **HigResPic2**(https://www.larsonelectronics.com/images/product/HigResPic2/344051.JPG)
- **HigResPic3**(https://www.larsonelectronics.com/images/product/HigResPic3/344051.JPG)
- **HigResPic4**(https://www.larsonelectronics.com/images/product/HigResPic4/344051.JPG)
- **HigResPic5**(https://www.larsonelectronics.com/images/product/HigResPic5/344051.JPG)
- **HigResPic6**(https://www.larsonelectronics.com/images/product/HigResPic6/344051.JPG)
- **HigResPic7**(https://www.larsonelectronics.com/images/product/HigResPic7/344051.JPG)
- **ISO 9001 Certification**(http://larsonelectronics.com/images/pdfdocs/ISO9001.PDF)
- **Business Certificate**(https://www.larsonelectronics.com/images/pdfdocs/w9.PDF)
- **Shipping Time Map**(https://www.larsonelectronics.com/images/product/ShippingTimeMap/ShippingTimeMap.pdf)