Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.498.3364

RNT-HALPRM-1000WMH

RENTAL 1000 Watt Metal Halide Light - Class 1 Div. 2 Groups A-D - T3b Temperature - 110K lumens

Product ID: 47141

Please see last page for supporting documentation for this product(certificates, CAD files & drawings, IES files, wiring diagrams, etc).



Larson Electronics LLC manufactures a wide variety of products, including custom built to spec designs. The pictures displayed for this unit are a general representation of form factor for the product line and may not accurately represent this exact configuration in every detail due to custom builds and changes between similar products in our standard catalog. The specifics for this configuration are listed in the specification table and supporting documentation (CAD files, Dimensional Drawing, Name Plate Diagram, Wiring Diagram, etc.). This means that specific details (receptacles, plugs, wires, connections, mounting brackets, external finishes, etc.) may not be accurately represented in images vs specifications. Please review specifications and do not order based solely on images.

RNT-HALPRM-1000WMH Metal Halide
Lamp Type: Metal Halide
Dimensions: 22" W X 11" D X 26 1/4" H w/Yoke Mount
Watts: 1000
Lumens Per Watt: 100-115 Approx.
Voltage: 120V, 208V, 240V, or 277V / 220-480 OPT

Lighting Configuration: Flood Pattern

Mounting: Slip Fit Pole Mount or Zinc Trunnion

Weight: 45 lbs
U.L. Listing: Outdoor Marine Approved
Total Lumens: 110,000

Wiring: 3/4 inch Threaded NPT Conduit Entrance

Rental Type: Monthly, Weekly, Daily

Click here to view the Explosion Proof Light Design Description

Click here to view the Explosion Proof Light Temperature Rating Table

Rentals: In an effort to cut back on contracts and various other paper work, Larson Electronics processes rentals like orders until the product is returned. This means, we will charge the customer for the product total and credit back the difference once the fixture is returned. Weekly and Monthly terms are available. Customer must pay shipping to and from the destination. Please contact us at (903) 498-3363 for further information if required.
Rental Prices for the RNT-HALPRM-1000WMH;
Monthly...$167.00 USD
Weekly...$100.00 USD

U.L Ratings
Class I, Division 2 Groups A, B, C, D
UL Standard 1598 (supersedes UL Standard 57)
UL Standard 844
Class I Div. 2 UL Standard 1598A
Max OP Temp 325°C (T1 NEC ID Number)

Operating temperature 325 degrees C (T3b)

Not Approved For Confined Spaces

Special Orders - Special Requirements
Contact us for special requirements

Toll Free: 1-800-369-6671
Intl: 1-903-270-1187

Fax: 1-903-498-3364

E-mail: sales@larsonelectronics.com

Made in the USA
This unit is for rentals.
The extremely durable Larson Electronics RNT-HALPRM-1000WMH metal halide hazardous area light produces exceptional illumination from a 1000 watt metal halide lamp. Constructed of die cast aluminum and U.L. listed for marine use, this metal halide fixture is a versatile and ideal hazardous area lighting solution for areas where wet or corrosive environments are encountered.
The rugged RNT-HALPRM-1000WMH metal halide light fixture is weatherproof and suitable for use in wet, outdoor and marine environments, making it an ideal lighting solution for industrial applications, boat docks, building exteriors and outdoor work areas. The lamp housing is weatherproof and constructed of pressure cast copper free aluminum with an architectural bronze Polyester finish. The lens door is pressure-cast copper-free aluminum, and secured with 1/4" diameter captive stainless steel slotted hex-head bolts. This unit features an integral multi- tap ballast with a choice of of 120V, 208V, 240V, or 277V connections. Also available are optional and seperate 220V and 480V configurations. Choose voltage options when ordering.
The optical assembly includes thermal shock and impact resistant door glass with a pressure-cast copper-free aluminum door frame and heavy duty, high temperature silicone rubber seal. The lamp socket is a specification grade mogul base porcelain unit with heavy gauge brass, a nickel-plated, double lamp-grip screw shell and spring-loaded center contact. The reflectors are a double segment compound parabolic design with Alzak® finish for maximum efficiency.

Mounting choices include:

1. Yoke mount: zinc plated steel yoke with architectural bronze Polyester finish.
2. Poletop mount: built-in slip-fitter for internal wiring. Adjustable laterally and vertically. Slip fits 2" or 2 1/2" pipe. Architectural bronze Polyester finish.

This hazardous area light is rated IP65, U.L. standard 844 and 1598 compliant, approved Class 1 Division 2, Groups A,B,C,D, and U.L. listed 1598A for outdoor salt water marine environments. The integral multi-tap ballast is protected within the weatherproof housing and has primary electrical taps for 120V, 208V, 240V, and 277V. This lamp is suitable for use in areas where flammable petrochemical vapors are sometimes present in a non-confined, open air work space and IS NOT suitable for use in confined spaces.
This 1,000 watt metal halide light is highly durable, produces110,000 lumens in a wide flood pattern, and has a maximum operating temperature of 325°C (T1 NEC Identification Number). All hardware on this unit is resistant to rain, snow, salt water and corrosive chemicals. The heavy duty design and attractive finish of this fixture makes it a popular choice for outdoor applications regardless of whether the locations are designated hazardous or not. Bulb is not included with with this fixture.

Click Here for Notes on Wiring this Light

Make all electrical connections in accordance with the National Electrical Code and any applicable local code requirements. Verify that supply voltage is correct by comparing it to nameplate. Three-conductor No. 14 cable (with 90° C minimum insulation) is recommended for making electrical connections. Wiring is accomplished through the wiring box provided on the fixture. The box is provided with a size 3/4-in. NPT threaded conduit opening. Wiring methods must comply with NFPA 70 (The National Electrical Code), Article 501 for Class I, Division 2 Hazardous (Classified) Locations. To get inside the unit, open the door, loosen the (2) screws holding the reflector and remove the reflector. Verify the correct supply voltage and lamp wattage. Bulb not included.

Made in the USA Quality

1. High Efficiency Metal Halide lamp.

Metal Halide Benefits

1. Long lamp life.

2. Approximately 100-115 Lumens per Watt
3. Rugged Pressure Cast Aluminum Housing.
4. Thermal Shock and Impact Resistant Glass Lens Door.
5. Heavy Duty Door Gasket.
6. Socket: Mogul Base heavy gauge brass, nickel-plated double lamp-grip screw shell .
7. Low Maintenance.
8. Slip Fit Pole Mount or Zinc Plated Yoke Mount.
9. Heavy Duty High Heat Silicone Door Glass Seal.
10. Architectural Bronze Polyester Finish.


2. High efficiency and low amp draw after initial startup.
3. High durability and reliability.
4. High output and very good color rendering.
5. Vibration and shock resistant.
6. Low maintenance.


Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.498.3364

Frequently Asked Questions (FAQ)



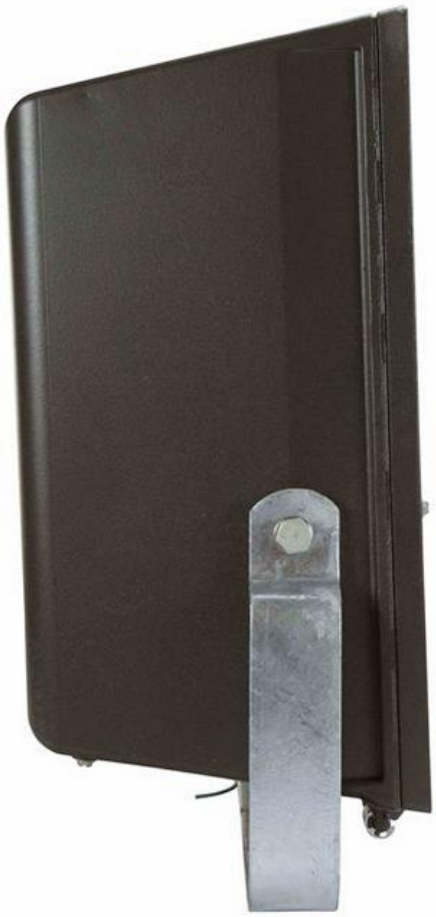

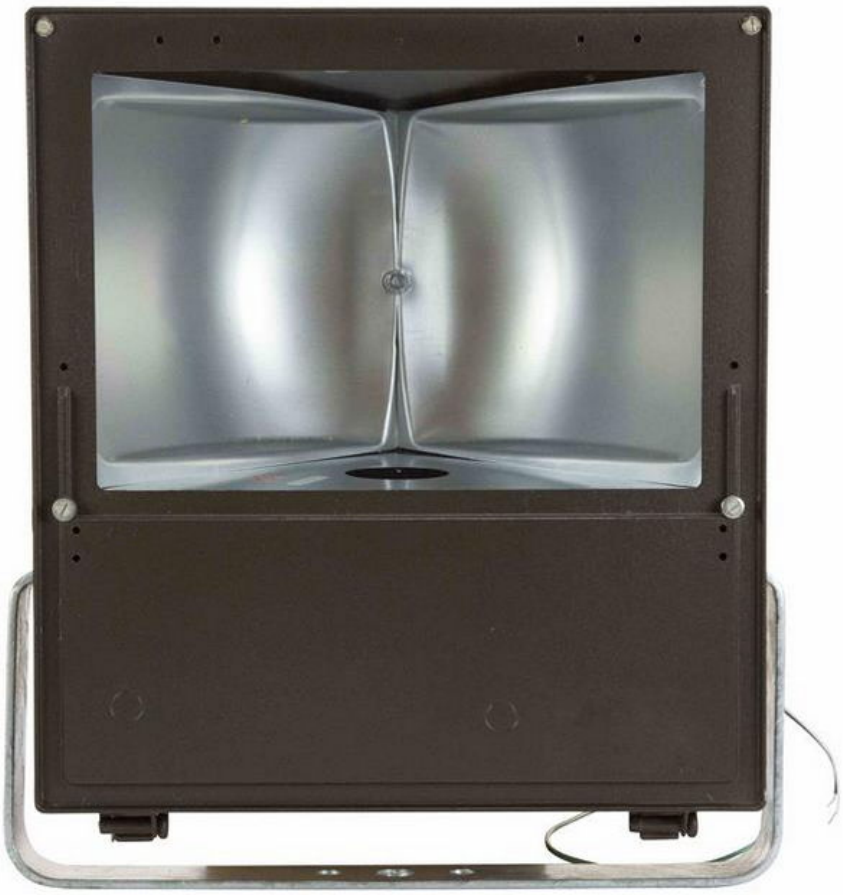

Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.498.3364

RNT-HALPRM-1000WMH

Product ID: 47141

Export Control Classification Number (ECCN): EAR99

Options:

RNT-HALPRM-1000WMH-Rental Length-Voltage

Example: RNT-HALPRM-1000WMH-MR-120V

Rental Length	
MONTHLY	-MR
WEEKLY	-WR
DAILY	-DR

Voltage	
120V	-120V
208V	-208V
240V	-240V
277V	-277V

Links (Click on the below items to view):

- **Dimensional Drawing 2D**
- **Operations Manual**
- **HigResPic1**
- **HigResPic2**
- **HigResPic3**
- **HigResPic4**
- **Video1**
- **ISO 9001 Certification**
- **Business Certificate**
- **Shipping Time Map**