Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.498.3364

RNT-EPF-30P

RENTAL Intrinsically Safe Blower (Fan) - Runs off Air Compressor - Class I, II, & III - 25' Duct

Product ID: 47407

Please see last page for supporting documentation for this product(certificates, CAD files & drawings, IES files, wiring diagrams, etc).



Larson Electronics LLC manufactures a wide variety of products, including custom built to spec designs. The pictures displayed for this unit are a general representation of form factor for the product line and may not accurately represent this exact configuration in every detail due to custom builds and changes between similar products in our standard catalog. The specifics for this configuration are listed in the specification table and supporting documentation (CAD files, Dimensional Drawing, Name Plate Diagram, Wiring Diagram, etc.). This means that specific details (receptacles, plugs, wires, connections, mounting brackets, external finishes, etc.) may not be accurately represented in images vs specifications. Please review specifications and do not order based solely on images.

RNT-EPF-30P Explosion Proof Fan/Blower
Air consumption: 38 cfm
Inlet Pressure: (Max) – 100 psi
Noise Level : 86 Dba

Motor: 1.5 Horsepower

Bearings : Permanently Lubricated

RPM: 3000

Fan Type: Axial Blower/Extractor

Size: 12" Diameter (305 mm)

Weight: 28 Lbs (12.7 kg)

Height: 21" (533 mm)

Length: 17" (432 mm)

Width : 14" (355 mm)

Rental Type: Monthly, Weekly, Daily

Rentals: In an effort to cut back on contracts and various other paper work, Larson Electronics processes rentals like orders until the product is returned. This means, we will charge the customer for the product total and credit back the difference once the fixture is returned. Weekly and Monthly terms are available. Customer must pay shipping to and from the destination. Please contact us **Toll Free:** at 1-800-369-6671 or (903) 498-3363 for further information if required.
Rental prices for the EPF-30P;
Monthly...288.00 USD
Weekly...173.35 USD USD

UL and C-UL Listed
Class I, Groups A, B, C and D
Class II, Groups E, F and G
Class III Hazardous locations

Special Orders - Special Requirements

Contact us for special requirements

Toll Free: 1-800-369-6671

Intl: 1-903-270-1187

Fax: 1-903-498-3364

E-mail: sales@larsonelectronics.com

Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.498.3364

Made in the USA
This Unit is a Rental

The Larson Electronics RNT-EPF-30P Explosion Proof Ventilator Fan / Blower with 25 foot static conductive duct safely and effectively redirects stale air from hazardous location areas. This explosion proof blower is unique due to it is certification for all groups including groups A and B where only air driven blowers are normally certified for these groups. UL and C-UL listed.

The RNT-EPF-30P Explosion Proof Ventilator Fan / Blower is designed for confined spaces that require a powerful ventilator that meets strict hazardous space standards. This explosion proof fan/blower delivers high-performance with uncompromising safety and is UL and C-UL listed for use in Class I, Groups A, B, C and D; Class II, Groups E, F and G; and Class III hazardous locations. This fan is pneumatically powered, meaning this fan does not operate on electricity and requires a compressor to operate.

Instead of being driven by an electrically powered motor, this fan connects to a compressor and operates on pressurized air. This unit has a 3/8 connecting port for standard compressor lines and requires a compressor capable of producing a steady 38 CFM flow at 100 PSI.

Note on Explosion Proof Fans: Can be used as an intake and an exhaust fan.



Click Photo to Enlarge




Click Photo to Enlarge



Click Photo to Enlarge

AIR FLOW RATES
Free Air – 2063 CFM
15 foot straight duct – 1753 CFM
15 foot duct with 1 90 degree bend – 1616 CFM
15 foot duct with 2 90 degree bends – 1450 CFM
25 foot straight duct – 1619 CFM
25 foot duct with 1 90 degree bend – 1497 CFM
25 foot duct with 2 90 degree bends – 1433 CFM

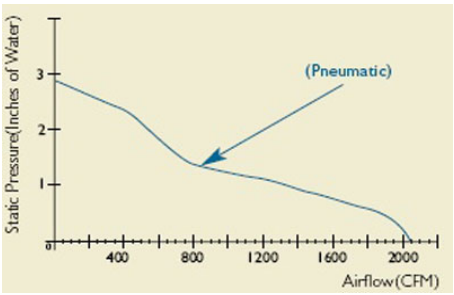

Click Photo to Enlarge

Click Here for Information on the Composition of the EPF-30P Housing.

This fan/blower unit has a CFM rating of 2,063, ensuring ample airflow and effective ventilation for larger jobs. This intrinsically safe unit is incapable of sparking and features a fully enclosed high performance motor and 25 feet of static conductive duct for effective and efficient routing and movement of airflow. Hazardous location areas require this fan to have a static conductive duct (12 inches X 25 feet) which is included in this package. The duct consists of a single-ply polyester reinforced PVC vinyl fabric hose with an external wearstrip reinforced with a spring steel wire helix. It is lightweight for blower applications and highly compressible. The retractability of the static conductive duct allows for convenient storage and easy transport in a fraction of its fully extended length and has low friction loss. The wearstrip offers external abrasion resistance, and is listed as YL 94 V-0 flame retardant. Ambient operating temperatures for this unit range from -20 degrees to 180 degrees Fahrenheit.

Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.498.3364

Frequently Asked Questions (FAQ)

Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.498.3364

RNT-EPF-30P

Product ID: 47407

Export Control Classification Number (ECCN): EAR99

Options:

RNT-EPF-30P-Rental Length

Example: RNT-EPF-30P-MR

Rental Length	
MONTHLY	-MR
WEEKLY	-WR
DAILY	-DR

Links (Click on the below items to view):

- **Dimensional Drawing 2D**
- **Operations Manual**
- **Video1**
- **Video2**
- **ISO 9001 Certification**
- **Business Certificate**
- **Shipping Time Map**